MILITARY SPECIFICATION

APRON, DENTAL, PLASTIC, DISPOSABLE

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 This specification covers a disposable plastic apron suitable for use in protecting a patient during prosthodontic procedures.

2. APPLICABLE DOCUMENTS

2.1 The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of the specification to the extent specified herein:

SPECIFICATIONS

Federal

PPP-B-585	Boxes, Wood, Wirebound.
PPP-B-601	Boxes, Wood, Cleated-plywood.
PPP-B-621	Boxes, Wood, Nailed and Lock-corner.
PPP-B-636	Box, Fiberboard.

Military

MIL-L-10547	Liners, Case, and Sheet, Overwrap; Water-Vaporproof or Waterproof, Flexible.

STANDARDS

Federal .

FED-STD-406	Plastics: Methods of Testing.

Military

MIL-STD-105	Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129	Marking for Shipment and Storage.

Source: https://assist.dla.mil -- Downloaded: 20261O-21T09:51Z
Check the source to verify that this is the current version before use.

(Copies of specifications and standards required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following document forms a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

ASTM D1709-67 Standard Methods of Test for Impact Resistance of Polyethylene Film by the Free Falling Dart Method.

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race Street, Philadelphia, Pa. 19103).

3. REQUIREMENTS

3.1 Material. The disposable plastic apron shall be fabricated from seamless, flat polyethylene film, 0.00045 to 0.00086 inch thick.

3.2 Style, design, and dimensions. The apron shall be a disposable plastic sheet suitable for protecting the clothing of a dental patient from impression materials, softened waxes, and similar materials which are used during prosthodontic procedures. The style, design, and dimensions of the apron shall be as specified in Figure 1.

3.3 Color. The disposable apron shall be translucent or transparent light blue or light green in color. The color shall be uniform throughout the apron.


3.4 Impact resistance. The impact resistance of the polyethylene film shall be 20 grams, minimum, when tested as specified in 4.4.1.

3.5 Tensile strength. The tensile strength of the polyethylene film shall be 1,700 pounds per square inch (p.s.i.), minimum, in the machine direction and 1,200 p.s.i., minimum, in the transverse direction, when tested as specified in 4.4.2.

3.6 Ultimate elongation. The ultimate elongation of the polyethylene film shall be 150 percent, minimum, in the machine direction, and 350 percent, minimum, in the transverse direction, when tested as specified in 4.4.2.

3.7 Quantity furnished. The polyethylene aprons shall be furnished either as a continuous, tear-away roll containing a minimum of 250 folded-over aprons with perforations between each apron, or as a flat pack containing a minimum of 250 individually dispensable aprons.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T09:51Z
Check the source to verify that this is the current version before use.

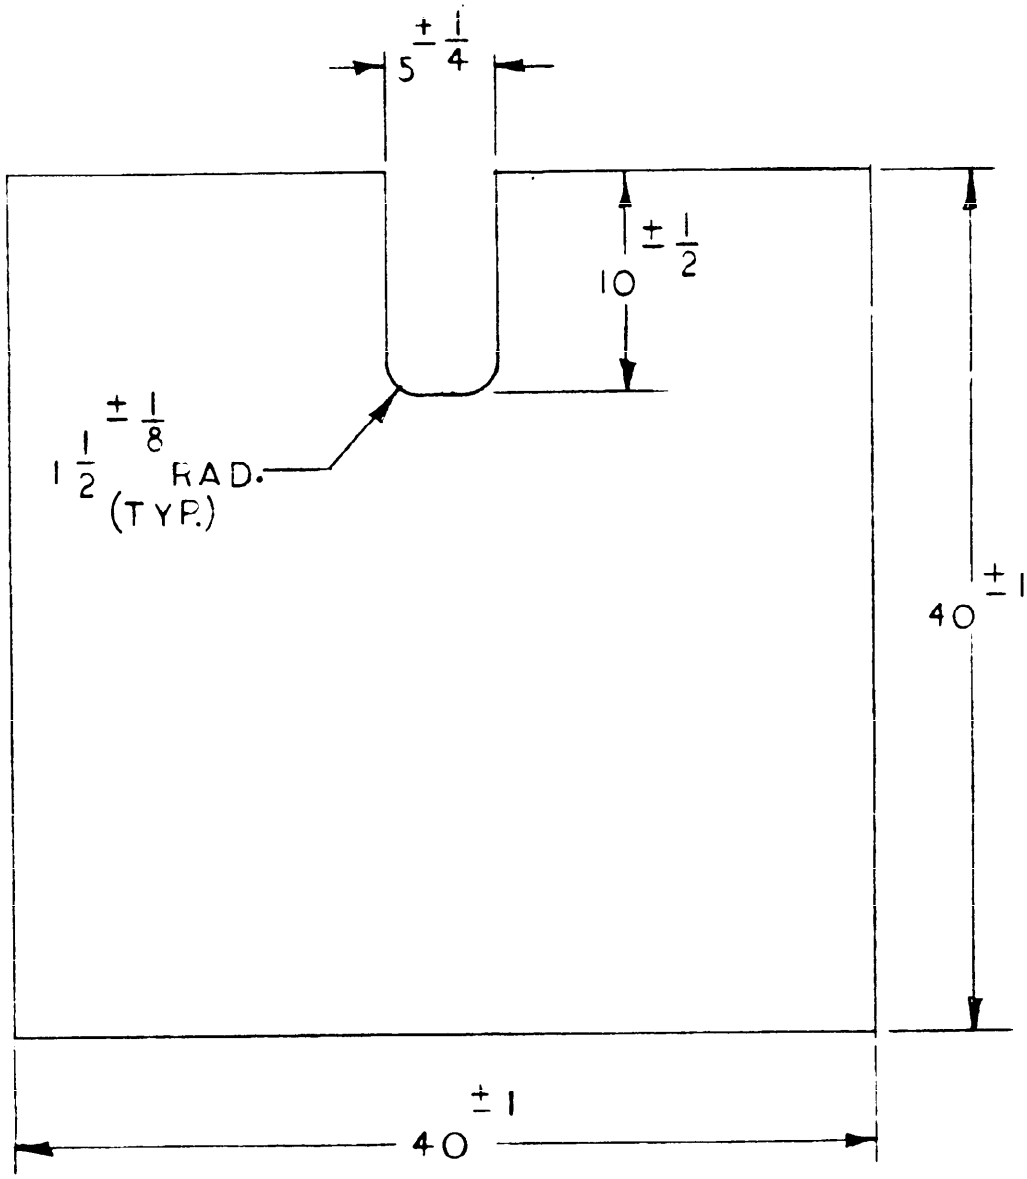

DIMENSIONS ARE IN INCHES

DISPOSABLE PLASTIC APRON

FIGURE -1-

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T09:51Z
Check the source to verify that this is the current version before use.

3.8 Workmanship. Workmanship shall be first class throughout. The aprons shall be free from defects which detract from their appearance or may impair their serviceability.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in this specification where such inspections are deemed necessary to assure that supplies and services conform to prescribed requirements.

4.1.1 Records. Records of examinations and tests performed by or for the contractor shall be maintained by the contractor and made available to the Government, upon the Government's request, at any time, or from time to time, during the performance of the contract and for a period of 3 years after delivery of the supplies to which such records relate.

4.1.2 Inspection. Inspection, as used in this specification, is defined as both examination (such as visual or auditory investigation without the use of special laboratory appliances or procedures) and testing (determination by technical means of physical and chemical properties) of the item.

4.1.3 Certificates of quality. Certificates of quality, supplied by the manufacturer of the polyethylene film may be furnished in lieu of actual performance of such testing by the contractor, provided that lot identity has been maintained and can be demonstrated to the Government. The Certificate shall include the name of the manufacturer or supplier, the NSN, the Item Identification, the name of the component, the lot number, the lot size, the sample size, the date of testing, the test method, individual test results, the specification requirements, the name of the contractor and the contract number.

4.2 Quality conformance inspection. The examinations and tests required to assure conformance of those items or lots of items to be offered are classified as specified in Tables I and III (see 4.2.1 and 4.3) and Table II (see 4.2.2).

4.2.1 Sampling for examination. Sampling for examination shall be conducted in accordance with MIL-STD-105. The inspection levels and acceptable quality levels (AQL's) shall be as indicated in Table I. Unit of product for examination purposes shall be one package of aprons. From each package selected, a minimum of three aprons shall be examined.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T09:51Z
Check the source to verify that this is the current version before use.

Table I. Examination criteria

Type defect	Inspection level	AQL (Percent defective)
Major A	S-2	1.0
Major B	S-1	1.5
Minor A	S-2	2.5
Minor B	S-1	4.0

4.2.2 Sampling for tests. Sampling for the FED-STD-406 or American Society for Testing and Materials (ASTM) tests of Table II shall be in accordance with the test method reference for each lot or batch of material. A sufficient quantity from each lot or batch of polyethylene shall be selected for test purposes.

Table II. Tests

Characteristic	Requirement	Test procedure	Inspection level
Impact resistance	3.4	4.4.1	S-2
Tensile strength	3.5	4.4.2	S-2
Ultimate elongation	3.6	4.4.2	S-2

4.3 Examination. The plastic apron shall be examined for defects including, but not limited to, those listed in Table III.

Table III. Classification of Defects

Category	Defect
Major A:	
101	Style and design not as specified.
102	Holes, tears, or cuts present in apron (except around periphery).
103	No perforations between aprons (applicable only to aprons on roll).
104	Foreign matter imbedded in plastic.
Major B:	
151	Dimensions of cutout not as specified.
152	Thickness of apron not as specified.

Source: https://assist.dla.mil -- Downloaded: 202610-21T09:51Z
Check the source to verify that this is the currenversion before use.

Table III. Classification of Defects (Cont'd)

Category	Defect
Minor A:	
201	Color of apron not as specified.
202	Color of apron not uniform.
203	Holes, tears,or cuts present around periphery of apron.
204	Packaging and packing not as specified.
205	Marking on packaging and pack not as specified.
Minor B:	
251	Length or width of apron not as specified.
252	Fewer than 250 aprons per roll, packet, or flat pack.

4.4 Test procedures.

4.4.1 Impact resistance. The impact resistance of the polyethylene film shall be determined in accordance with ASTM Designation D1709-67, Method A.

4.4.2 Tensile strength and ultimate elongation. The tensile strength and ultimate elongation of the film shall be determined in accordance with Method B in Method 1013 of FED-STD-406.

5. PREPARATION FOR DELIVERY

5.1 Packaging. Packaging shall be Level A or C as specified (see 6.1).

5.1.1 Unit of issue. One package containing 250 aprons, as specified, constitutes one unit of issue.

5.1.2 Packaging quantities. The number of units of issue indicated in Table IV,shall be packaged in each unit, intermediate, and exterior container, as applicable, for the required level of protection specified in the procurement document.

Table IV. Packaging quantities

Unit package	Intermediate package	Exterior container
1 unit	Not required	2 units

5.1.2.1 Packing variation permitted. If the required number of units in the entire shipment is less than the number of units specified to be overpacked in an exterior container, such units shall be packed in an exterior container of suitable size and design, acceptable to a common carrier, which shall insure safe delivery to destination.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T09:51Z
Check the source to verify that this is the current version before use.

5.1.3 Level A.

5.1.3.1 Unit package. Each unit (250 aprons) shall be folded on a scored board and inserted into a corrugated tray, and further packaged in a hermetically sealed polyethylene package.

5.1.4 Level C. Units shall be packaged in standard commercial containers, of the size and kind commonly used, which will afford the degree of protection required for shipment and use of the product for its intended purpose.

5.2 Packing. Packing shall be Level A, B or C as specified (see 6.1).

5.2.1 Level A.

5.2.1.1 Exterior container. Exterior container shall be designed for a type 2 load and constructed in accordance with PPP-B-585, class 3, style 3; PPP-B-601, overseas type; PPP-B-621, class 2; or PPP-B-636, class weather-resistant, grade V3c. Closure and strapping shall be as specified in the appendix of the applicable box specification. Special requirements of applicable table shall apply for PPP-B-636 box.

5.2.1.2 Case liner. Each Level A wood box shall be lined with a waterproof case liner conforming to MIL-L-10547. Closure and sealing shall conform to applicable paragraphs of appendix thereto. Case liner shall not be required for fiberboard boxes. Fiberboard box shall be waterproof in accordance with paragraph 30.4 of PPP-B-636.

5.2.2 Level B.

5.2.2.1 Exterior container. Exterior container shall be designed for a type 2 load and constructed in accordance with PPP-B-585, class 1, style 3; PPP-B-601, domestic type; PPP-B-621, class 1; or PPP-B-636, class domestic, 200 lb. test. Closure shall be as specified in the appendix of the applicable box specification. Fiberboard box shall be closed by method II of PPP-B-636. Special requirements of applicable table shall apply for PPP-B-636 box.

5.2.3 Level C. The subject commodity shall be packed in substantial commercial containers of the type, size, and kind commonly used for the purpose, so constructed as to insure acceptance and safe delivery by common or other carriers, at the lowest rate, to point of delivery called for in the contract or purchase order.

5.3 Marking.

5.3.1 Interior packages. Each unit package shall be marked in accordance with MIL-STD-129. When labels are utilized, waterproofing shall be required only when applicable carton is fabricated of water-resistant material. Contract or purchase order number and name of contractor shall be shown.

5.3.2 Exterior container. Exterior container shall be marked in accordance with MIL-STD-129.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T09:51Z
Check the source to verify that this is the current version before use.

6. NOTES

6.1 Ordering data. Procurement documents should specify the following:

(a) Title, number, and date of this specification.
(b) Selection of applicable levels of packaging and packing (see 5.1 and 5.2).

6.2 National Stock Number (NSN) coverage. This specification covers the following item appearing in the Federal Supply Catalog:

Stock Number	Item Identification
6532-00-455-9958	APRON, DENTAL, Plastic, Disposable, 250s.

6.3 Supersession data. This specification includes the requirements of Purchase Description No. 1 for Federal Stock Number (FSN) 6532-455-9958, dated 24 September 1969.

6.4 Limitations. This specification does not cover all types, classes, grades, or sizes of the commodity indicated by the title of this specification, or those which are commercially available, but is intended to cover the types which are normally procured to meet Military requirements.

Custodians:
Army - MD
Navy - MS
Air Force - 03

Review activities:
Army - MD
Navy - MS
Air Force - 03

Preparing activity:
Defense Supply Agency - DM

Project No. 6532-1077

Review information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DODISS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T09:51Z
Check the source to verify that this is the current version before use.

FOLD

DEFENSE PERSONNEL SUPPORT CENTER
2800 South 20th Street
Philadelphia, Pa. 19101

POSTAGE AND FEES PAID
DEFENSE SUPPLY AGENCY
DoD - 304



OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

HEADQUARTERS, DEFENSE PERSONNEL SUPPORT CENTER
ATTN: DIRECTORATE OF MEDICAL MATERIEL, CODE ATT
2800 SOUTH 20TH STREET
PHILADELPHIA, PA. 19101

FOLD

Source: https://assist.dla.mil -- Downloaded: 202610-21T09:51Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS. The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/ vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE

MIL-A-37049

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?

☐ YES ☐ NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO.

DATE

DD FORM 1 JAN 72 1426

REPLACES EDITION OF 1 JAN 66 WHICH MAY BE USED

Source: https://assist.dla.mil -- Downloaded: 202610-21T09:51Z
Check the source to verify that this is the current version before use.