MIL-S-37080A
8 September 1976
SUPERSEDING
MIL-S-37080
26 February 1974

MILITARY SPECIFICATION

SLIPPERS, CONVALESCENT PATIENT'S,
Polyurethane Foam, Disposable

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers the requirements for one type, four adult sizes and three children sizes of a disposable, polyurethane foam, convalescent patient's slippers.

1.2 Classification. The slippers shall be furnished in the following sizes, as specified (See 6.2).

SCHEDULE OF SIZES

ADULTS		CHILDREN	
Small	4 to 6	Toddler	4 to 7
Medium	6 to 8	Child	8 to 12
Large	8 to 10	Youth	13 to 3
Extra Large	10 to 12		

2. APPLICABLE DOCUMENTS

2.1 Issues of documents. The following documents of the issue in effect on date of invitation for bids or request for proposals form a part of this specification to the extent specified herein:

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Headquarters, Defense Personnel Support Center, ATTN: Directorate of Medical Materiel, Code ATT, 2800 South 20th Street, Philadelphia, PA 19101, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T09:55Z
Check the source to verify that this is the current version before use.

SPECIFICATIONS

FEDERAL

PPP-B-566 - Boxes, Folding, Paperboard
PPP-B-636 - Boxes, Shipping, Fiberboard
PPP-B-676 - Boxes, Setup

STANDARDS

MILITARY

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129 - Marking for Shipment and Storage

(Copies of specifications, standards, drawings, and publications required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer).

2.2 Other publications. The following document forms a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

AMERICAN SOCIETY FOR TESTING AND MATERIALS STANDARDS

D1564 Slab Flexible Urethane Foam, Testing

(Application for copies should be addressed to the American Society for Testing and Materials (ASTM), 1916 Race Street, Philadelphia, PA 19103.)

(Technical society and technical association specifications and standards are generally available for reference from libraries. They are also distributed among technical groups and using Federal agencies.)

3. REQUIREMENTS

3.1 Foam. The slippers shall be fabricated from a flexible, porous, hand washable, urethane foam. The urethane foam shall not have an objectionable odor and shall be non-irritating and non-toxic when inspected as specified in 4.3.1.1. The foam shall conform to the requirements of table I when inspected as specified in 4.3.1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T09:55Z
Check the source to verify that this is the current version before use.

TABLE I. Urethane foam properties.


Characteristics	Requirements
Thickness, inches minimum	0.275
Pounds per cubic foot	1.65 ± 0.10
Tensile strength, pounds per square inch minimum	25
Elongation, percent minimum	300
Compression set at 90 percent deflection, percent maximum	30
Indentation load deflection at 25 percent deflection, pounds - force per 50 square inches	42 ± 5

3.2 Design and construction. The slippers shall be an elongated oval in shape with an opening in the uppers for the insertion of the foot and a sole. The upper and sole shall each be fabricated from one piece of the urethane foam (see 3.1). Each slipper shall be interchangeable, not shaped (contoured) for the right or left foot, so that each individual slipper shall be capable of being worn on either foot. The uppers and soles shall be heat sealed together as close as possible to the edge of the slipper. The heat sealed seam shall be straight, continuous and parallel to the edge of the slipper. No part of any slipper shall be deformed, distorted, bent or pleated as a result of the heat sealing or by any other process of manufacturing. The slippers shall conform in appearance to figure 1.

3.3 Color. The color of the sole shall be charcoal gray. The color of the uppers for the various sizes shall be as follows:

ADULTS		CHILDREN	
SIZE	COLOR OF UPPERS	SIZE	COLOR OF UPPERS
Small, 4 to 6	Gold	Toddler, 4 to 7	Rose
Medium, 6 to 8	Blue	Child, 8 to 12	Green
Large, 8 to 10	Avocado	Youth, 13 to 3	Lilac
Extra Large, 10 to 12	Pumpkin		

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T09:55Z
Check the source to verify that this is the current version before use.

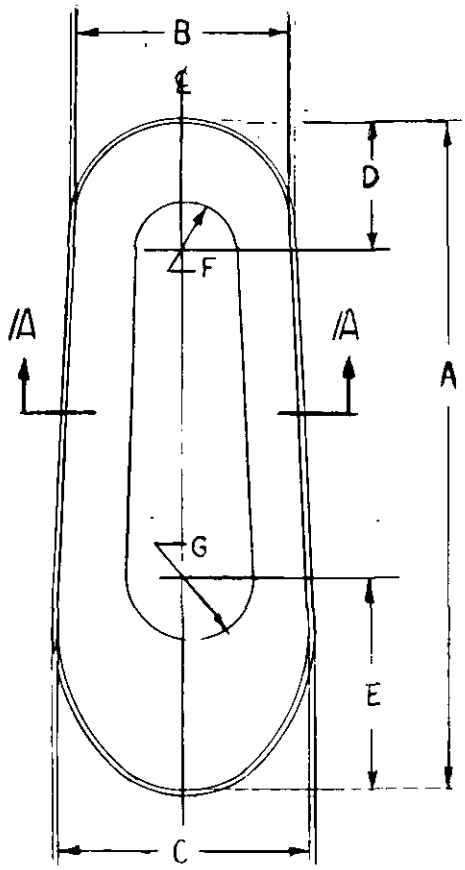

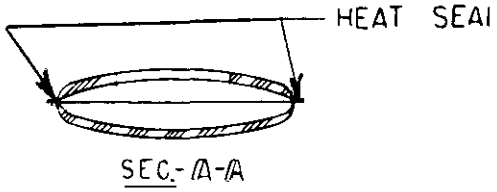


FIGURE 1. Slippers, convalescent patient's, polyurethane foam

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T09:55Z
Check the source to verify that this is the current version before use.

3.4 Dimensions. The assembled slippers shall conform to tables II and III, as applicable, when the locations are measured as detailed in figure 1. The tolerance on all dimensions, except D and E, shall be + 3/16 inch. No tolerance shall be applicable for D and E since these are reference location points for determining the radius for F and G. All dimensions shall be linear dimensions, except F and G, which shall be radius dimensions. The variation in dimensions between the dimensions of each slipper in a pair of slippers shall not exceed 1/4 inch.

TABLE II. Assembled adult slippers-dimensions in inches.

SIZE	LOCATION						
	A	B	C	D	E	F	G
Small 4 to 6	8-13/16	3-1/4	3-13/16	2-1/16	3-3/8	11/16	13/16
Medium 6 to 8	9-9/16	3-3/8	4	2-1/4	3-3/8	3/4	15/16
Large 8 to 10	10-9/16	3-5/8	4-7/16	2-5/16	4	13/16	1-1/8
Extra Large 10 to 12	11-7/16	3-7/8	4-5/8	2-5/8	4-1/16	15/16	1-3/16

TABLE III. Assembled children slippers-dimensions in inches.

SIZE	LOCATION						
	A	B	C	D	E	F	G
Toddler 4 to 7	5-1/2	2-1/2	2-13/16	1-1/2	2-1/8	9/16	11/16
Child 8 to 12	6-13/16	2-3/4	3-3/16	1-3/4	2-3/8	11/16	13/16
Youth 13 to 3	7-7/8	3	3-7/16	1-3/4	2-7/8	3/4	13/16

3.5 Workmanship. The slippers shall not be stiff nor contain any spot, stain, hole, void, abraded area, tear, cut, mend, patch, scorch, or any other defect which may detract from their appearance or may impair their serviceability. The slippers shall conform to the quality and grade of product established by this specification. The occurrence of defects shall not exceed the acceptance criteria established herein.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T09:55Z
Check the source to verify that this is the current version before use.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Records. Records of examinations and tests performed by or for the contractor shall be maintained by the contractor and made available to the Government, upon the Government's request, at any time, or from time to time, during the performance of the contract and for a period of three years after delivery of the supplies to which such records relate.

4.1.2 Inspection. Inspection, as used in this specification, is defined as both examination (such as visual and auditory investigation without the use of special laboratory appliances or procedures) and testing (determination by technical means of physical and chemical properties) of the item.

4.1.3 Certificates of quality. Certificates of quality supplied by the manufacturer of the materials may be furnished in lieu of actual performance of such testing by the contractor, provided lot identity has been maintained and can be demonstrated to the Government. The certificate shall include the name of the contractor, the contract number, the name of the manufacturer or supplier, the NSN, the Item Identification, the name of the component/material, the lot number, the lot size, the sample size, the date of testing, the test method, individual test results, and the specification requirements.

4.2 Quality conformance inspection. The sampling and inspection shall conform to MIL-STD-105, except where otherwise indicated hereinafter.

4.2.1 Sampling.

4.2.1.1 Inspection lot.

4.2.1.1.1 Foam. An inspection lot size shall be expressed in units of one linear yard of the foam and shall consist of all the foam received by the slipper manufacturer at one time. The sample unit for inspection shall be one linear yard of the foam.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T09:55Z
Check the source to verify that this is the current version before use.

4.2.1.1.2 Slippers. An inspection lot size shall be expressed in units of one slipper but the lot shall only consist of pairs of slippers made essentially under the same conditions and from the same materials and components. The sample unit for inspection shall be one slipper.

4.2.1.2 Sampling for tests and examinations of the foam and slippers. The sample size, acceptance criteria, tests and examinations required for the foam and slippers, as applicable, shall be as specified in table IV.

TABLE IV. Sample size, acceptance criteria, tests and examinations for the foam and slippers.

Item	Inspection	PARAGRAPH		Sample size	Acceptance criteria
		Requirement	Method		
Foam 1/	Toxicity	3.1	4.3.1.1	2/	2/
	Thickness	3.1	4.3.1	2/	2/
	Weight	3.1	4.3.1	2/	2/
	Tensile strength	3.1	4.3.1	2/	2/
	Elongations	3.1	4.3.1	2/	2/
	Compression set	3.1	4.3.1	2/	2/
	Indentation load deflection	3.1	4.3.1	2/	2/
Slippers	Visual examination	3.2, 3.3 and 3.5	4.3.2.1	Inspection Level II	An acceptable quality level of 2.5 defects per 100 units for major defects and 6.5 defects per 100 units for total (major plus minor) defects
	Dimensional check	3.4	4.3.2.1	Inspection Level S-3	An acceptable quality level of 4.0 defects per 100 units

1/ The inspection of the foam shall be conducted either at the contractor's or subcontractor's plant.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T09:55Z
Check the source to verify that this is the current version before use.

2/ The sampling for the testing of the foam shall be in accordance with 4.2.1.1.1 and as follows:

Lot Size (Yards)	Sample Size
800 or less	2
801 up to and including 22,000	3
22,001 and over	5

The samples shall be taken from the beginning of each roll. The lot shall be unacceptable if one or more sample units fail to meet any of the requirements specified in table IV. Each sample unit taken for inspection shall be used to determine all the characteristics of the foam specified in table IV.

4.3 Inspection methods.

4.3.1 Foam. The foam characteristics, thickness, weight, tensile strength, elongation, compression set and indentation load deflection, shall be determined in accordance with ASTM Standard D1564. The toxicity shall be determined as specified in 4.3.1.1.

4.3.1.1 Toxicity. The toxicity and irritability of the foam shall be determined by any standard method. The test method used shall be approved by the contracting officer. A certificate of quality may be submitted for the non-toxic and non-irritating properties (see 4.1.3). Certification in lieu of testing is acceptable provided that the contractor certifies in writing that the raw materials and processing are identical to those used on foam previously tested and approved by the contracting officer.

4.3.2 Visual examination.

4.3.2.1 Assembled slippers. Every slipper from each pair of assembled slippers selected in accordance with table IV as a sample unit from the lot shall be thoroughly checked dimensionally and examined visually to determine conformance to this specification. For the pairing examination, the pair of assembled slippers shall be examined as a unit and each pairing defect shall be classified as a single defect. The classification and list of defects, tables V and VI, as applicable, shall be used to classify and enumerate the defects found.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T09:55Z
Check the source to verify that this is the current version before use.

TABLE V. Classification of defects for the visual examination of the assembled slippers.

DEFECT	MAJOR	MINOR
a. Any hole, void, scissors or knife cut, tear, mend, or burn.	X	
b. Any stiff, spotted, stained, or abraded area.	X	
c. Any open or non-continuous heat sealed seam.	X	
d. Any portion of any slipper bent, pleated, deformed or distorted.	X	
e. Any sole not charcoal gray in color.		X
f. Color of any upper not as specified.	X	
g. Color of any slipper not uniform, any portion shaded or any shade bar.		X
h. Objectionable odor beyond that expected in normal processing operations.	X	
i. Color of the uppers in a pair of slippers not the same.	X	
j. Any component not as specified or any defect of assembly, not herein classified.	1/	
k. Any component, component part, or required operation omitted, or any operation improperly performed, not herein classified.	1/	

1/ The defect shall be classified and scored as a major defect, when it seriously affects the serviceability or appearance, otherwise it shall be classified and scored as a minor defect.

TABLE VI. List of defects for the dimensions of the assembled slippers.

Assembled measurements	Defect
MEASURE A, B, C, F and G	Any measurement deviating from the measurements specified in 3.4 and tables II and III, as applicable, and applicable tolerances, shall be enumerated as a dimensional defect.
Equal length, width and front and back radius	The variation in the length or the width between the slippers in any pair shall be enumerated as a dimensional defect, when it exceeds 1/4 inch.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T09:55Z
Check the source to verify that this is the current version before use.

4.3.3 Packaging inspection. The inspection of the unit, intermediate package, packing and marking for shipment and storage shall be in accordance with quality assurance provisions of the applicable container specification and the marking requirements of MIL-STD-129.

5. PACKAGING

5.1 Packaging. Packaging shall be level A or C as specified (see 6.2).

5.1.1 Unit of issue. One pair of slippers, as specified constitutes one unit of issue.

5.1.2 Level A.

5.1.2.1 Unit packaging. Each pair of slippers shall be clean and packaged in a clear heat sealed polyethylene bag of suitable size and thickness. A 1/4 inch diameter hole shall be made in one corner of the bag to allow excess air to escape.

5.1.2.2 Intermediate package. Fifty unit packages containing adult or youth slippers of one size only or one hundred unit packages containing toddler or child slippers shall be packaged in a box conforming to PPP-B-566 or PPP-B-676. As an alternate, the intermediate package may be a dispensing type box of an appropriate size and design. Closure of the intermediate boxes shall be adequate to prevent accidental opening.

5.1.3 Level C. Units shall be packaged in standard commercial containers of the size and kind commonly used which will afford the degree of protection required for shipment and use of the product for its intended purpose.

5.2 Packing. Packing shall be level A, B or C, as specified (see 6.2).

5.2.1 Level A. Two intermediate packages containing slippers of one size only shall be packed in an exterior container designed for a type 2 load and conforming to PPP-B-636, class weather-resistant. Closure, strapping and waterproofing shall be as specified in the appendix of the box specification.

5.2.2 Level B. Two intermediate packages of one size only shall be packed in an exterior container designed for a type 2 load and conforming to PPP-B-636, class domestic. Closure shall be as specified in the appendix of the box specification.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T09:55Z
Check the source to verify that this is the current version before use.

5.2.3 Level C. The subject commodity shall be packed in substantial commercial containers of the type, size and kind commonly used for the purpose and so constructed as to insure acceptance and safe delivery by common or other carriers, at the lowest rate to point of delivery called for in the contract or purchase order.

5.3 Marking.

5.3.1 Unit package. Each unit package shall be marked with the national stock number, item identification, unit of issue, size, contract or purchase order number, name of contractor and the date of manufacture. The required information shall be printed in black directly on the bag across the center face or on a label inserted within the bag in such a manner as to permit ready identification.

5.3.2 Intermediate package. Each intermediate package shall be marked in accordance with MIL-STD-129 except that the date of manufacture shall be shown in lieu of the date packed. Contract or purchase order number, and name of contractor shall be shown.

5.3.3 Exterior container. Exterior container shall be marked in accordance with MIL-STD-129 except that the date of manufacture shall be shown in lieu of the date packed.

6. NOTES

6.1 Intended use. The polyurethane foam, disposable, convalescent patient's slippers are intended for use by children and adult patients confined to medical facilities.

6.2 Ordering data. Procurement documents shall specify the following:

a. Title, number and date of this specification.
b. Quantity and size required (see 1.2).
c. Selection of applicable levels of packaging and packing (see 5.1 and 5.2).

6.3 Catalog information. This specification is intended to cover the following items appearing in the Federal Supply Catalog:

National Stock No.	Item Identification
6532-00-079-7889	SLIPPERS, CONVALESCENT PATIENT'S, Polyurethane Foam, Disposable, Size, Small-4 to 6, pair
6532-00-079-7899	SLIPPERS, CONVALESCENT PATIENT'S, Polyurethane Foam, Disposable, Size, Medium-6 to 8, pair

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T09:55Z
Check the source to verify that this is the current version before use.

National Stock No.	Item Identification
6532-00-079-7902	SLIPPERS, CONVALESCENT PATIENT'S, Polyurethane Foam, Disposable, Size, Large-8 to 10, pair
6532-00-079-7904	SLIPPERS, CONVALESCENT PATIENT'S. Polyurethane Foam, Disposable, Size, Extra Large-10 to 12, pair
6532-01-011-5055	SLIPPERS, CONVALESCENT PATIENT'S, Polyurethane Foam, Disposable, Size, Child-8 to 12, pair
6532-01-011-5056	SLIPPERS, CONVALESCENT PATIENT'S. Polyurethane Foam, Disposable, Size, Toddler-4 to 7, pair
6532-01-011-5057	SLIPPERS, CONVALESCENT PATIENT'S, Polyurethane Foam, Disposable, Size, Youth-13 to 3, pair

Custodians:
Army - MD
Navy - MS
Air Force - 03

Preparing activity:
Defense Supply Agency - DM

Project No. 6532-1120

☆U.S. GOVERNMENT PRINTING OFFICE: 1976-703-020/102

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T09:55Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. *DoD contractors, government activities, or manufacturers/vendors who are prospective suppliers of the product* are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?
   A. GIVE PARAGRAPH NUMBER AND WORDING.

   B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?

   ☐ YES ☐ NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO.

DATE

DD FORM 1 JAN 72 1426 REPLACES EDITION OF 1 JAN 66 WHICH MAY BE USED

S/N 0102-014-1802

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T09:55Z
Check the source to verify that this is the current version before use.