MILITARY SPECIFICATION

TUNICS, OPERATING, SURGICAL, WOMAN'S, COTTON-POLYESTER, STATIC RESISTANT, LONG SLEEVES

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers the requirements for one type and three sizes of a long sleeve, static resistant, cotton-polyester, woman's, surgical operating tunic.

1.2 Classification. The surgical, operating tunics shall be furnished in the following sizes, as specified (see 6.2).

SIZES

SMALL	MEDIUM	LARGE

2. APPLICABLE DOCUMENTS

2.1 The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein:

SPECIFICATIONS

Federal

CCC-S-746	Stockinet, Surgical
DDD-L-20	Label, For Clothing, Equipage and Tentage. (General Use)
PPP-B-636	Boxes, Shipping, Fiberboard
PPP-B-676	Box, Setup

Military

MIL-F-10884	Fasteners, Snap
MIL-T-43548	Thread, Polyester, Cotton-Covered
MIL-T-43624	Thread, Polyester, Spun

FSC 6532

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T09:53Z
Check the source to verify that this is the current version before use.

STANDARDS

Federal

FED-STD-751	Stitches, Seams, and Stitchings
FED-Test Method Std No. 191	Textile Test Methods

Military

MIL-STD-105	Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129	Marking for Shipment and Storage

(Copies of specifications and standards required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications - The following document forms a part of this specification to the extent specified herein. Unless a specific issue is identified, the issue in effect or date of invitation for bids or request for proposal shall apply

NATIONAL FIRE CODES

(Application for copies should be addressed to the National Fire Protection Association, International (NFPA), 470 Atlantic Avenue, Boston Mass. 02110)

(Technical society and technical association specifications and standards are generally available for reference from libraries. They are also distributed among technical groups and using Federal agencies.)

3. REQUIREMENTS

3.1 Materials and components The materials and components shall conform to the applicable specifications and standards as listed or required herein.

3.1.1 Fabric

3.1.1.1 Tunics - The tunics shall be fabricated from a fabric having a composition of nominal 65 percent polyester, 34 percent combed cotton and one percent austenitic type corrosion-resisting stainless steel fiber having a diameter of approximately 8 microns. The fabric shall conform to Table I when inspected as specified in Table IV.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T09:53Z
Check the source to verify that this is the current version before use.

TABLE I
COTTON-POLYESTER TUNIC FABRIC PROPERTIES

CHARACTERISTICS	REQUIREMENTS
Weave	Plain
Ply of yarn.	
Warp	Single
Filling	Single
Yarns per inch, minimum.	
Warp	70
Filling	50
Breaking strength, pounds minimum:	
Warp	90
Filling	90
Ounces per square yard, minimum	4.8
Nonfibrous materials, percent maximum	2.0
pH	5.0 to 9.0
Shrinkage, percent maximum:	
Warp	3.0
Filling	3.0
Anti-static properties maximum	
Surface resistivity, ohms per unit square	$1 : 10^{11}$
OR	
Static decay, seconds	0.5

3.1.1.1.1 Color The color of the tunic fabric shall be a wet dyed Grayish Green shade. When inspected as specified in 4.3.1 the color of the cloth shall approximately match the color of the standard shade (see 6.3). The use of dyes or substances containing elementary sulfur or compounds capable of oxidation to sulfuric acid is prohibited. The dyed and finished fabrics shall show not more than a slight trace of labile sulfur, when inspected as specified in Table IV.

3.1.1.1.2 Colorfastness. When inspected as specified in Table IV, the dyed and finished fabric shall show colorfastness to light laundering, perspiration and dry crocking equal to or better than the standard sample

3.1.1.2 Pockets and facings - The pockets and facings shall be fabricated from the cotton-polyester-metallic fabric, 3.1.1.1 through 3.1.1.1.2.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T09:53Z
Check the source to verify that this is the current version before use.

3.1.2 Thread. All the sewing operations shall be performed with the cotton-covered, polyester thread conforming to MIL-T-43548, Ticket Number 70, 2 ply and Ticket Number 50, 2 ply, or the spun polyester thread conforming to MIL-T-43624, Class 1 or 2 Ticket Number 70, 2 or 3 ply, or Ticket Number 40, 3 ply and Ticket Number 50, 3 ply (see Table II) When spun polyester thread is used, the Ticket Number 40, 3 ply and Ticket Number 50, 3 ply may be substituted for the Ticket Number 50, 2 ply, and the Ticket Number 70, 2 or 3 ply may be substituted for the Ticket Number 70, 2 ply (see Table II) The color of the thread shall approximately match the color of the fabric, 3.1.1.1.1, when inspected as specified in 4.3.1.

3.1.3 Cuffs. The cuffs shall be fabricated from the seamless, tubular stockinet material conforming to JJ-S-736, Type I, 3 inches wide, except for the following.

a. The color of the cuffs shall approximately match the color of the tunic fabric, 3.1.1.1.1, when inspected as specified in 4.3.1.

b. The stockinet material shall have at least good colorfastness to light, laundering and perspiration when inspected as specified in Table IV

c. The minimum bursting strength shall be 75 points.

d. A doubled layer shall have a minimum crosswise stretch (width direction) of 5 inches when inspected as specified in 4.3.2.

3.1.4 Tape.

3.1.4.1 Scissors holding. The scissors holding tape for holding two scissors in the right pocket shall be of a strength and construction suitable for the intended purpose. The tape shall be 1/2 to 5/8 inch wide. The scissors holding tape shall be uncved, untreated and fabricated from cotton A certificate of quality shall be submitted for this item (see Table IV).

3.1.4.2 Bias binding. The bias binding tape shall be fabricated from the cotton-polyester-metallic fabric, 3.1.1.1 through 3.1.1.1.2, cut on a bias of 45 degrees, 1-3/8 inch wide

3.1.5 Snap fasteners - The snap fasteners shall conform to MIL-F-10884, Style 3, except that the snap fasteners shall be fabricated from 300 series stainless steel.

3.2 Design. The tunic shall be a coat style jacket without a collar, snap fastener front closure, full length sleeves terminating in knitted cuffs and two front patch pockets with a built in scissors holder for two scissors in the right pocket. The tunic shall conform in appearance to Figure 1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T09:53Z
Check the source to verify that this is the current version before use.

3.3 Construction -

3.3.1 Cutting - The tunic shall be cut in strict accordance with the patterns furnished by the Government (see 6.4), which provide for seam allowance, size, shape, and placement of the pockets, snap fasteners, directional lines for cutting, and notches for the proper assembling of all the parts. The Government patterns shall not be altered in any manner and shall be used for making the working patterns. The working patterns shall be identical to the Government furnished patterns The component parts of the tunic shall be cut from the same ply of the lay. The cuffs shall be cut so that the wales shall be in the length direction. The cuffs shall be a doubled thickness of the stockinet material of sufficient size to finish in a cuff when attached to the sleeve 4 ± 1/4 inches.

3.3.2 Shade and size marking All the component parts of the tunic shall be marked or ticketed by any commercial method to insure a uniform shade and proper assembly throughout the tunic No metal fastening device or sewn-on ticket shall be used. The shade and size markings shall be accomplished by the use of an ink pad numbering machine, rubber stamp, or pencil, provided the markings do not show through to the outerside of the tunic and are not deleterious to the cloth. The markings, which are placed on the seam allowance, shall not be visible on the outerside. The adhesive type shade and size marking tickets may be used for the shade and size markings provided they conform to 3.3.2.1. The assembled tunic shall not contain any shade or size marking ticket nor any marking that was used for locating the position for attaching of any component.

3.3.2.1 Adhesive shade and size marking tickets The adhesive shade and size marking tickets shall be fabricated from paper and shall contain a thermo-activated type adhesive on one side. The adhesive shall not discolor or damage the cloth and the adhesive mass shall not adhere to the cloth, upon removal of the ticket The heat used to attach the thermoactivated adhesive tickets shall not stiffen, scorch, or damage the cloth in any manner.

3.3.3 Replacement of defective components and cut parts Care shall be exercised during the spreading, cutting and manufacturing processes to assure that any component and cut part containing any material defect or damage that is classified in this specification as a defect shall be replaced with a non-defective and properly matched component or cut part, as applicable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T09:53Z
Check the source to verify that this is the current version before use.

3.3.4 Seams and stitching. All the seams and stitching used in the fabrication of the tunics shall conform to Table II. The seam and stitch types shall conform to FED-STD-751. When two or more seam or stitch types are specified for the same part of the operation, the contractor may select one of them for the operation. The minimum and maximum number of stitches for each operation shall conform to Table II. When stitch type 401 is used, the looper thread shall be on the innerside of the garment. The bight of all the overedge type stitching shall be 3/16 to 7/16 inch from the edge of the cloth. The seam allowances shall be maintained so that no runoffs or open seams shall occur. All seams shall start and finish uniformly. No seam or component shall be twisted, puckered, or pleated and no part of the tunic shall be caught in an unrelated operation or seam. All the seam edges shall be properly forced out and shall not contain any folds. All the thread ends shall be trimmed to a maximum length of 1/4 inch. No cut or raw edge shall be visible on the exterior of the tunic.

3.3.4.1 Sewing. Each row of stitching shall be straight and parallel to the seam edge. The straightness of the stitching, in any row, shall be maintained within a tolerance of plus or minus 1/32 inch. The same tolerance for spacing and parallelism shall be applicable for two or more rows of stitches. The ends of Stitch Type 301 stitching that are not caught in other seams or stitching shall be backstitched by overlapping on themselves a minimum of 1/2 inch. Each thread break, skip, and run-off shall be overstitched not less than 1/2 inch. Skipped stitches or thread breaks on Stitch Type 401 stitching may be repaired using Stitch Type 301. The thread tension shall be maintained so that there shall not be any loose or tight stitching and the lock shall be embedded in the materials sewn together.

3.3.5 Manufacturing operation requirements. The tunics shall be manufactured in accordance with the operation requirements specified in Table II. The supplier is not required to follow the exact sequence of operations listed, unless otherwise specified. Any additional basting or holding stitches used to facilitate the fabrication of the tunics are permissable, provided the thread does not show on the surface of the assembled tunic.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T09:53Z
Check the source to verify that this is the current version before use.

TABLE II

NO	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM & STITCHING TYPE	STITCHES PER INCH	THREAD	
					NEEDLE	BOBBIN OR LOOPER
-	Hem pockets					
	a Turn the top of the pocket down with the raw edge turned under and stitch to the pocket 1/16 to 1/8 inch from the edge of the hem The width of the hem shall be 1/2 ± 1/8 inch	301	EFb-1	8 to 12	50/2	50/2
2	Attach facing and bias binding tape					
	a Superimpose the facing on the underside of the left front so that the cut edges coincide Attach together with the stitches 1/8 to 3/16 inch from the edge (This operation is optional '	301	SSa-1	8 to 12	50/2	50/2
	b Attach the facing to the right side in the same manner as specified in 2a (This operation is optional.)	301	SSa-1	8 to 12	50/2	50/2
	c When the front facings are not cut with one side containing the selvage the side of the facing that shall be visible shall be overedge stitched	504 or 505	EFa-1	8 to 12	70/2	70/2
	d The width of each facing shall be 2-1/4 ± 1/4 inches The length shall be governed by the length of the front opening for the various sizes The top of the facing shall blend with the curvature at the neck					
	e The cut edges of the front opening and facings and at the neck area shall be sewn within the folds of the bias binding tape The stitching shall be 1/16 to 1/8 inch from the edge The cut edges of the binding tape shall not be visible	301	BSa-1	8 to 12	50/2	50/2
3	Join fronts to back at shoulder					
	a Join each front to the back at the shoulder	512	SSa-1	8 to 12	50/2	50/2
		514 514b 517 or 519	SSa-2	8 to 12	50/2 (chain and 70/2 (overedge)	70/2

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T09:53Z
Check the source to verify that this is the current version before use.

TABLE II (Cont'd)

NO	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM & STITCHING TYPE	STITCHES PER INCH	THREAD	
					NEEDLE	BOBBIN OR LOOPER
4	Set sleeves.					
	a. Join the sleeves to their respective armholes.	512 515 516 517 or 519	SSa-2 SSa-2	8 to 12 8 to 12	50/2 50/2 (chain) and 70/2 (overedge)	50/2 70/2
5	Close sides and underarm seams					
	a Join the sides together and the underarm seams of the sleeves	512 515 516 517 or 519	SSa-2 SSa-2	8 to 12 8 to 12	50/2 50/2 (chain and 70/2 (overedge)	50/2 70/2
6	Make and attach cuffs					
	a Fold a double layer of the stockinet material to form a cuff					
	b Attach the cuffs to the underside of the sleeve The cuff shall finish 4 ± 1/4 inches in length	501 502 503 or 504	SSa-2 SSa-2	8 to 12 8 to 12	70/2 70/2	70/2 70/2
7	Attach scissors holding tape to the right front					
	a Position the tape on the right front as indicated by the patterns.					
	b Bartack the tape to the front The bartacks shall be 3 ± 1 inch long The bartacks shall be centered and located 1/4 inch from each end The middle bartack shall be located in the center of the tape within 1/8 inch	Bar-tack		22 per bartack	50 2	50 2
8						

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T09:53Z
Check the source to verify that this is the current version before use.

TABLE II (Cont'd)

NO	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM & STITCHING TYPE	STITCHES PER INCH	THREAD	
					NEEDLE	BOBBIN OR LOOPER
8	Set pockets.					
	a. Turn under raw edges of the sides and bottom for the amount specified by the patterns and stitch the pockets to the fronts. The stitching shall be 1/16 to 1/8 inch from the pocket edges (see operation 7).	301	LSc-1	8 to 12	70/2	70/2
	b. Each attached pocket shall be 6-1/4 ± 1/4 inches wide and 7 ± 1/4 inches long for all sizes					
	c. Bartack the upper left and right corners with 3/8 inch long bartacks. The bartacks shall be located 1/8 ± 1/16 inch in from the side of the pocket	Bartack		21 per bartack	50/2	50/2
9	Hem the bottom of the tunic					
	a. Fold under the bottom of the tunic with the raw edges turned under to form a hem 1/2 ± 1/8 inch wide. The bottom of the front opening facings shall also be caught in the hem. The stitching shall be 1/16 to 1/8 inch from the edge	301	EFb-1	8 to 12	50/2	50/2
10.	Attach the snap fasteners					
	a. Attach the 5 sockets with the pronged ring on the right exterior side of the tunic front opening in the position indicated by the patterns. The facing shall also be caught between the socket and pronged ring					
	b. Attach the 5 studs with the eyelet on the left exterior side of the front opening in such a manner that they shall align and mate with the sockets without causing any distortion, twisting or puckering of the fronts. The facing shall also be caught between the studs and eyelets					

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T09:53Z
Check the source to verify that this is the current version before use.

TABLE II (Cont d)

NO	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM & STITCHING TYPE	STITCHES PER INCH	THREAD	
					NEEDLE	BOBBIN OR LOOPER
11.	Attach labels.					
	a Position the identification label on the center of the back, on the innerside of the garment, within 1/2 inch, with the top of the label not more than 1/4 inch below the edge of the bias binding tape. Attach the label on all four sides	301	LSbj-1	8 to 12	50/2	50/2
	NOTE The top edge of the identification label may be caught in the bias binding tape seam (see operation 2) Attach the remaining three sides					
	b Position the washing information label just below the identification label and attach all four sides	301	LSbj-1	8 to 12	50/2	50/2
	NOTE The top edge of the washing information label may be caught in the bottom seam of the identification label. Attach the remaining three sides.					
12	Trim all thread ends and remove all thread scraps and foreign matter					
13	Mate all the five snap fasteners and fold each tunic without creating any creases or wrinkles to an approximate size 14 by 12 inches					

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T09:53Z
Check the source to verify that this is the current version before use.

3.4 Dimensions. The tunics after assembly shall conform to the dimensions for the different sizes specified in Table III when measured as specified in 4.3.3. The variation in length between the left and right sleeve dimensions shall not exceed 1/2 inch in any tunic.

TABLE III

TUNIC DIMENSIONS IN INCHES

LOCATION	SIZE			TOLERANCE
	SMALL	MEDIUM	LARGE	
Chest	21	23	25	± 1/2
Sweep	43	47	51	± 1
Length	30	31	32	± 1
Sleeve Length	18	18	18	± 1

3.5 Labels.

3.5.1 Identification The identification label shall conform to DDP-L-20, Type I, Class 1, Launderable Label. The size of the label shall be adequate to contain the following information

TUNIC, OPERATING, SURGICAL, WOMAN'S, COTTON-POLYESTER,
STATIC RESISTANT, LONG SLEEVES
MIL-T-37064
SIZE
CONTRACT OR ORDER NUMBER
NSN
WOOL OR FIBER PRODUCTS ACT INFORMATION

3.5.1.1 Alternate identification An alternate identification label fabricated from cotton coutil or poplin cloth having a greige weight of 2.11 yards per pound (45 inch width) may be used in lieu of the label specified in 3.5.1 The printing medium and printing shall conform to DDP-L-20, Type I, Class 1 Launderable Label. The label shall contain the same information specified in 3.5.1.

3.5.2 Washing information The washing information label shall conform to DDP-L-20 Type I Class 3, Launderable Label The label shall contain the following information

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T09:53Z
Check the source to verify that this is the current version before use.

1. For machine washing, use wash and wear cycle or durable press cycle. Wash with moderately hot water (140°F), using soap or mild detergent.

2. For hand washing, wash in moderately hot water as described above. DO NOT WRING OR TWIST.

3. Dry in tumble dryer at medium setting. Remove immediately at end of drying. Shape and hang.

4. To drip dry, remove from water before last spin cycle. Shape and hang

5. If touching up is required iron at a moderate heat setting.

DO NOT REMOVE THIS LABEL

3.5.3 Washing instructions A lightweight, white, paper washing instruction label with legible and durable black characters shall be placed on top of the folded tunic prior to packaging The paper label shall be visible and capable of being read through the polyethylene film bag (see 5 1.2 The size of the letters and numerals shall be 10 point minimum in capitals The size of the paper instruction label shall be at the option of the supplier The label shall contain the following information

WASHING INSTRUCTIONS

OPERATION	LEVEL (INCHES)	TEMPERATURE °F	TIME MINUTES	SUPPLIES PER 100 POUNDS OF GARMENTS	
1. Flush	12	Cold	3	none	
2. Suds	6	140	10	sodium metasilicate	1.5 pounds
				sodium tripolyphosphate (STPP	0.5 pounds
				nonionic detergent	1.0 pounds
					.1 pint
				brightener (whites only	1.0 ounce
After 10 minutes at 140°F raise to 160°F for 10 minutes					
3. Rinse	10	150	3		
4. Bleach (white only)	10	150	5	1% sodium hypochlorite (rinse colors instead)	2.0 quarts
5. Rinse	10	135	3		
6. Rinse	10	120	3		

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T09:53Z
Check the source to verify that this is the current version before use.

WASHING INSTRUCTIONS (CONT'D)

OPERATION	LEVEL (INCHES)	TEMPERATURE °F	TIME MINUTES	SUPPLIES PER 100 POUNDS OF GARMENTS
7. Rinse	10	105	3	
8. Sour	c	Cold	5	ammonium silicofluoride 1.0 ounce

Notes: a. Wash Polyester-Cotton only with Polyester-Cotton.
b. Wash whites separately. Be sure wheel is clean.
c. Load wheel only to 2/3 its rated capacity.

3.6 Workmanship. The tunics shall not contain any spot, stain, hole, abraded area, tear, cut, mend, patch, scorch, or needle chew. The snap fasteners shall be clinched without distortion, damage, splitting, or cutting of the cloth. The metal components shall not be malformed, misaligned, fractured, broken, or distorted nor contain any corrosion, scale, pit, dent, crack, nick, burr, sliver, or sharp edge. The tunics shall conform to the quality of grade of product established by this specification. The occurrence of defects shall not exceed the acceptance criteria established herein.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Material and component inspection. In accordance with 4.1, the materials and components shall be inspected and tested in accordance with all the requirements of the referenced specifications and standards, unless otherwise excluded, amended, modified or qualified in this specification or purchase document.

4.1.2 Certificate of quality. When certificates of quality are submitted, in accordance with Table II, they shall contain verifiable actual test and inspection data. The Government reserves the right to inspect and test the components to verify the validity of the certification.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T09:53Z
Check the source to verify that this is the current version before use.

4.1.3 Inspection. Inspection, as used in this specification, is defined as both examination (an investigation without the use of special laboratory apparatus or procedures such as visual) and testing (a determination by technical means of the physical and chemical properties) of the item.

4.2 Quality conformance inspection. The sampling and inspection shall conform to MIL-STD-105, except where otherwise indicated herein after. The quality conformance inspection shall consist of the tests and examinations specified in 4.2.1 through 4.2.3.1.

4.2.1 Sampling for testing of the tunic and alternate identification label fabrics, stockinet material, and scissors holding tape. The sampling for testing of the tunic or alternate identification label fabrics, the stockinet material, or the scissors holding tape shall be in accordance with the following

LOT SIZE (YARDS)	SAMPLE SIZE (SAMPLE UNIT)
800 or less	2
801 up to and including 22,000	3
22,001 and over	5

The lot shall be unacceptable if one or more sample units fail to meet any of the test requirements specified in Table IV. The unit for expressing lot sizes and sample unit for testing the tunic and alternate identification label fabrics, the stockinet material and the scissors holding tape, as applicable, shall be in accordance with the applicable subsidiary specifications and as follows:

COMPONENT	LOT EXPRESSED AS	SAMPLE UNIT FOR TESTING
Tunic Fabric	Yards	2 yards full width
Alternate identification label fabric	Yards	1 2 yard full width
Stockinet material	Yards	1 2 yard full width
Scissors holding tape	Yards	2 yards full width

4.2.1.1 Testing of the tunic and alternate identification label fabrics, the stockinet material and the scissors holding tape. The methods for testing the tunic or alternate identification label fabrics, the stockinet material or the scissors holding tape, as applicable, shall be as specified in Table IV.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T09:53Z
Check the source to verify that this is the current version before use.

TABLE IV
TEST METHODS FOR TESTING THE TUNIC AND ALTERNATE IDENTIFICATION LABEL FABRICS AND THE STOCKINET MATERIAL

Component	Characteristic	Requirement Paragraph	Test Method
Tunic fabric 1/	Cotton identification	3.1.1.1	1200 2/ 3/
	Polyester identification	3.1.1.1	2/
	Stainless steel fiber	3.1.1.1	2/
	Fiber content		
	Percent polyester	3.1.1.1	2/
	Percent cotton	3.1.1.1	2/
	Percent stainless steel	3.1.1.1	2/
	Diameter stainless steel fiber	3.1.1.1	2/
	Weave	3.1.1.1	2/
	Ply of yarn	3.1.1.1	2/
	Yarns per inch	3.1.1.1	5050 3/
	Breaking strength	3.1.1.1	5100 3/
	Weight	3.1.1.1	5041 3/
	Nonfibrous materials	3.1.1.1	2611 3/
	pH	3.1.1.1	2811 3/
	Shrinkage	3.1.1.1	5552 3/
	Anti-static properties		
	Surface resistivity or	3.1.1.1	NFPA-56A
	Static decay	3.1.1.1	NFPA-56A
	Color	3.1.1.1.1	4.3.1 2/
	Kind of dye	3.1.1.1.1	2/
	Labile sulfur	3.1.1.1.1	2020 3/
	Colorfastness to		
	Laundering (3 cycles)	3.1.1.1.2	5610 3/ 4/
	Light	3.1.1.1.2	5660 3/
	Perspiration	3.1.1.1.2	5680 3
	Dry crocking	3.1.1.1.2	5651 3/
Alternate identification label fabric 1/	Cotton identification	3.5.1.1	1200 2/ 3/
	Weight	3.5.1.1	5041 2/ 3/
	Kind of cloth	3.5.1.1	2/
Stockinet material 1/	Color	3.1.3	4.3.1 2/ 3
	Colorfastness to		
	Light	3.1.3	5660 2/ 3
	Laundering (3 cycles	3.1.3	5610 2/ 3/4
	Perspiration	3.1.3	5680 2/ 3
	Stretch	3.1.3	4.3.2 2/
Scissors holding tape 1/	Material	3.1.4.1	2/
	Strength	3.1.4.1	2/
	Construction	3.1.4.1	2/

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T09:53Z
Check the source to verify that this is the current version before use.

1/ The inspection of the tunic and alternate identification label fabrics, the stockinet material and the scissors holding tape shall be conducted either at the contractor's or subcontractor's plant.

2/ A certificate of quality shall be submitted and will be accepted for the stated requirement (see 4.1.2).

3/ Refers to a test method of FED-Test Method-Std-No.-191

4/ The staining of the cotton fiber only on the color transfer cloth shall be evaluated. The test specimens shall be dried after each laundering.

4.2.2 Sampling for the visual and dimensional examination of the tunics

The inspection levels and acceptable quality levels (AQL) expressed in defects per 100 units for the visual and dimensional examination of the tunics shall be as follows

Inspection	Defects	Inspection level	AQL
Visual examination	Major	II	2.5
	Total (Major plus Minor)	II	10.0
Dimensional examination	One class	S-3	4.0

4.2.2.1 Visual and dimensional examination of the tunics. Each tunic selected as a sample unit from the lot, shall be thoroughly checked dimensionally and examined visually to determine conformance to this specification. The classification and list of defects, Tables V and VI as applicable shall be used to classify and enumerate the defects found

TABLE V
CLASSIFICATION OF DEFECTS FOR THE VISUAL EXAMINATION OF THE ASSEMBLED TUNICS

DEFECT	MAJOR	MINOR
GENERAL		
a. Any hole scissors or knife cut tear mend burn, or weakening defect such as a smash, multiple float loose slub, needle chew, or abraded area		
b. Any part of the tunic stiffened or scorched by any process of manufacture		
c. Any missing yarn, broken yarn, thin place, misweave, woven in waste, loose yarn, snagged thread, area of no dye penetration, or dye streak on the exterior of the tunic	1/	

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T09:53Z
Check the source to verify that this is the current version before use.

TABLE V (CONT'D)

DEFECT	MAJOR	MINOR
CUFF		
a. Any run, dropped stitch,	1/	
b. Lacking elasticity, too tight or loose	X	
c. Wales not in the length direction	X	
SNAP FASTENERS 2/		
a. Any surface rough or contains any crack, nick, burr, sharp edge, dent, or sliver	X	
b. Any surface unclear or contains embedded foreign matter		X
c. Any malformed, misaligned, corroded, fractured, broken, chipped, bent or distorted.	X	
d. Any missing, loose or improperly clinched resulting in cutting of the cloth	X	
e. Any mismated or misplaced causing distortion, twisting, or puckering of the fronts when mated together	X	
SHADED PARTS		
a. Any part shaded or any shade bar		X
b. Color of any fibrous component not as specified or not uniform		X
CLEANNESS		
a. Three or more thread ends not trimmed to a maximum length of 1/4 inch or three or more thread scraps not removed		X
b. Any unsightly slub, spot, or stain, any discoloration of the cloth caused by the removal of any shade and size marking ticket, any shade and size marking ticket excluding the metal fastening or sewn-on ring not removed, any shade and size marking identification stamping visible on the outerside of the tunic or any shade and size marking adhesive mass adhering to the cloth		X

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T09:53Z
Check the source to verify that this is the current version before use.

TABLE V (CONT'D)

DEFECT	MAJOR	MINOR
CLEANNESS (Cont'd)		
c. Any metal fastening device or sewn-on shade and size marking ticket attached to the tunic	X	
c. Any marking used for locating the position for attaching of any component visible on the top or underside of the tunic		X
COMPONENTS AND ASSEMBLY		
a. Any component not as specified or any defect of component or defect of assembly not herein classified	1/	
b. Any component, component part, or required operation omitted, or any operation improperly performed, not herein classified	1/	
c Any dimension not as specified, not herein classified	1/	
SEAMS AND STITCHING		
a. Accuracy of seaming		
1. Any seam, hem, or attachment of any component twisted, puckered, or pleated any part of the tunic or of any component caught in an unrelated operation or stitching any seam edge not properly forced out or contains any fold		X
2. Ends of stitching that are not caught in other seams or stitching		
(a Any not securely backstitched	X	
(b Any secure but backstitched for a distance less than 1/2 inch or the backstitching is not overlapped on itself		X
3. Thread breaks		
(a Any not securely overstitched	X	
(b) Any secure but overstitched for a distance less than 1/2 inch		X
4. Ends of any armhole seam, at the side seam, staggered by 1/2 inch or more		X

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T09:53Z
Check the source to verify that this is the current version before use.

TABLE V (CONT'D)

DEFECT	MAJOR	MINOR
SEAMS AND STITCHING (CONT'D)		
b. Gage of stitching 3/		
1. Any stitching irregular, unevenly or not gaged as specified, or not uniform		X
c. Open seams 4/		
1. Other than on the hem		
(a) Any more than 1/8 inch but not more than 1/4 inch		X
(b) Any more than 1/4 inch	X	
2. On the hem		
(a) Any more than 1/4 inch but not more than 1/2 inch		X
(b) Any more than 1/2 inch	X	
d. Raw edges 5		
1 Outerside of the tunic		
(a) Any more than 1/4 inch but not more than 1/2 inch		X
(b) Any more than 1/2 inch	X	
2 Innerside of the tunic		
(a) Any more than 1/2 inch but not more than one inch		X
(b) Any more than one inch	X	
e Seam and stitch type		
1 Not specified seam or stitch	X	
2 Any looper thread on the outerside of any tunic seam when Stitch Type 401 is used	X	
f. Stitch tension		
1. Any loose stitching 6/	X/	
2. Any tight stitching, resulting in breakage of the stitches, when normal pull is applied 7/	X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T09:53Z
Check the source to verify that this is the current version before use.

TABLE V (CONT'D)

DEFECT	MAJOR	MINOR
SEAMS AND STITCHING (CONT'D)		
g. Stitches per inch 8/		
1. Stitches more or less than specified		
(a) Tunic (excluding labels)		
(1) One or 2		X
(2) More than 2	X	
(b) Labels		
(1) One to 3		X
(2) More than 3	X	
h. Bartacks.		
1. Any missing loose misplaced or not serving the intended purpose	X	
2. Length of any not as specified	X 9/	
3. Any not located as specified or the tape for the scissors holder	X 9/	
DETAILED DEFECTS APPLICABLE TO SPECIFIC PARTS OF THE TUNIC		
FACINGS		
a Any short, tight, or twisted causing puckering or twisting to the fronts		X
POCKETS		
a Any pocket out of horizontal or vertical alignment		
1. More than 3/8 inch but not more than 1/2 inch		X
2. More than 1/2 inch	X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T09:53Z
Check the source to verify that this is the current version before use.

TABLE V (CONT'D)

DEFECT	MAJOR	MINOR
POCKETS (cont'd)		
b. Any not of uniform size and shape		X
c. The width of any pocket less than 6 inches or more than 6-1/2		X
d. The length of any pocket less than 6-3/4 inches or more than 7-1/4 inches long		X
SLEEVES		
a. Right sleeve in the left armhole or left sleeve in the right armhole or any sleeve, in its proper armhole, installed in a reverse position	X	
b. Any pleated at any armhole seam or any tight at any armhole seam causing puckers on any front or back		X
LABELS		
a Identification		
1. Size missing incorrect, or illegible	X	
2. Other than the size information, incomplete, incorrect, or illegible		X
3. Misplaced, off center of the back by more than 1/2 inch		X
4 Stitching omitted on one or more edges		X
b. Washing information.		
1. Any washing information missing incorrect incomplete, or illegible	X	
2. Stitching omitted on one or more edges		X
3. Not located as specified		X
c. Washing instructions		
1. Any washing instructions missing, incorrect, incomplete, or illegible	X	
2. Size of markings less than 10 points		X

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T09:53Z
Check the source to verify that this is the current version before use.

1/ The defect shall be classified and scored as a major defect when it seriously affects the serviceability or appearance otherwise it shall be classified and scored as a minor defect

2/ Each snap fastener shall be checked for proper function and attachment by snapping closed and unsnapping each snap fastener at least three times

3/ The gage of stitching defect shall be scored only when the condition exists for more than 1 inches or any row of stitching

4 A seam shall be classified and scored as oper when one or more stitches joining a seam are broken or when two or more continuous skipped stitches or run-offs occur Or double stitched seams a seam shall be classified and scored as open when either one or both sides of the seam contain any of the aforementioned for a single stitched seam

5/ Any edge that should be turned under and is not but is securely caught in the stitching shall be classified and scored as a raw edge Any raw edge that is not securely caught in the stitching shall be classified and scored as an oper seam.

6 A seam shall be classified and scored as loose when the top and bobbin threads are on the same surface.

7/ Puckering is evidence of tight tension or gathering of the material When puckering is evident and is not caused by the gathering of the material, the stitching shall be inspected for tight tension and breaking of stitches by exerting normal pull in the lengthwise direction of the stitching by pulling the material taut to straighter out the seam Puckering due to the gathering of the material shall be classified and scored as an accuracy of seaming defect

8/ The stitches per inch defect shall be scored only when the condition exists for more than 1 inches or any row of stitching

TABLE VI
LIST OF DEFECTS FOR THE DIMENSIONS OF THE ASSEMBLED TUNICS

ASSEMBLY MEASUREMENT	DEFECT
Measure the chest sweep length and sleeve length.	Any measurement deviating from the measurements specified in 3.4 and Table III and applicable tolerance shall be enumerated as a dimensional defect
Equal Length	
Sleeves	The variation in length between the left and right sleeve dimension shall be enumerated as a dimensional defect when it exceeds 1/2 inch

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T09:53Z
Check the source to verify that this is the current version before use.

4.2.3 Sampling for the visual examination for preparation of delivery. The inspection level and the AQL expressed in defects per 100 units shall be as follows:

DEFECTS	INSPECTION LEVEL	AQL
One class	S-2	2.5

4.2.3.1 Visual examination for preparation of delivery. Each of the fully prepared shipping containers, containing tunics of one size, selected as a sample unit from the lot, shall be visually examined to determine that the packaging, packing and marking conform to this specification. For this examination, the containers need not be sealed. The list of defects, Table VII, shall be used to enumerate the defects found.

TABLE VII
LIST OF DEFECTS FOR PREPARATION FOR DELIVERY

ITEM	DEFECT
Exterior and interior markings	Missing, incorrect, incomplete, or illegible, of improper size, location, sequence, or method of application, size shown on any interior or exterior container not the same, information on the washing instruction paper label or any polyethylene bag not readable through the film or no label in the polyethylene bag.
Materials	Any nonconforming component, any component or component part missing, damaged, or otherwise defective.
Workmanship	Inadequate application of the components, such as incomplete closure of any unit container, container flap, or loose strapping, bulging or distortion of any container, any unit container contains any metal fastening or stitches, any polyethylene bag damaged, any vent hole missing, or any open or non-continuous heat sealed seam.
Exterior and interior weight or content	Gross or net weight exceeds the requirement, number per container more or less than specified, more than one size tunics in the same exterior container, any tunic not folded as specified or not individually packaged, any deformed, distorted, bent or any portion of any tunic caught in any heat sealed seam.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T09:53Z
Check the source to verify that this is the current version before use.

4.3 Inspection methods

4.3.1 Color matching The color of the tunic fabric, thread and cuffs shall be compared to the approved shade under natural (north sky) daylight or artificial daylight having a color temperature of 7500 degrees Kelvin

4.3.2 Stretch of cuff A double thickness of the cuff shall be grasped with the thumb and the forefinger at each fold-line side While held in this position, the cuff shall be subject to an outward pull (stretch) to the maximum extent that can be exerted by hand pressure without damaging the cuff The extent of the stretch shall be measured

4.3.3 Procedure for measuring The snap fasteners shall be mated and snapped closed. The tunic to be measured shall be laid flat without tension, on a smooth, flat surface so that any creases or wrinkles shall not affect the measurement The measurements shall be made with the use of a yard stick, metal tape, or by use of any suitable measuring device The measurements shall be made as follows

a The chest dimension shall be taken at the base of the armholes from side seam to side seam

b The sweep dimension shall be taken along the entire bottom edge of the tunic.

c The length dimension shall be taken along the center of the back from the top of the neck opening to the bottom edge of the tunic

d. Measure the sleeve inseam along the under arm of the sleeve from the base of the armhole to the bottom of the cuff

5 PREPARATION FOR DELIVERY

5.1 Packaging Packaging shall be Level A or C as specified (see 6.2).

5.1.1 Unit of issue One package containing twelve tunics as specified constitutes one unit of issue

5.1.2 Packaging quantities The number of units of issue indicated in Table VIII shall be packaged in each unit intermediate, and exterior container, as applicable for the required level of protection specified in the procurement document

Table VIII Packaging quantities

Unit package	Intermediate package	Exterior container
1 unit	Not required	4 units

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T09:53Z
Check the source to verify that this is the current version before use.

5.1.2.1 Packing variation permitted. If the required number of units in the entire shipment is less than the number of units specified to be overpacked in an exterior container, such units may be packed in an exterior container of suitable size and design, acceptable to a common carrier, which shall insure safe delivery to destination.

5.1.3 Level A.

5.1.3.1 Unit package. Each tunic shall be neatly folded to an approximate dimension of 14 inches in length and 12 inches in width and packaged in a clear, snug fitting polyethylene bag having a minimum thickness of 0.00125 inch. A 1/4 inch diameter hole shall be made at one corner of the bag to allow excess air to escape and the closure shall be effected by heat sealing or by means of a tuck or reverse flap. Twelve tunics of the same size individually packaged in polyethylene bags shall be packaged in a snug fitting box constructed in accordance with PPP-B-636, type CF, class domestic or PPP-B-676 except that commercial colors are acceptable. Closure of the box shall be secured to prevent accidental spilling of contents under normal handling.

5.1.4 Level C. Units shall be packaged in standard commercial containers of the size and kind commonly used, which will afford the degree of protection required for shipment and use of the product for its intended purpose.

5.2 Packing.

5.2.1 Level A.

5.2.1.1 Exterior container. Exterior container shall be designed for a type I load and constructed in accordance with PPP-B-636 class weather-resistant. The exterior container shall also conform to the special requirements as specified in PPP-B-636. Closure, strapping and waterproofing shall be as specified in the appendix of the box specification.

NOTE: Strapping will not be required for shipments forwarded to a receiving activity within the continental limits of the United States for storage or redistribution.

5.2.2 Level B.

5.2.2.1 Exterior container. Exterior container shall be designed for a type I load and constructed in accordance with PPP-B-636 class domestic. The exterior container shall also conform to the special requirements as specified in PPP-B-636. Closure shall conform to method I or II as specified in the box specification.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T09:53Z
Check the source to verify that this is the current version before use.

5.2.3 Level C. The subject commodity shall be packed in substantial commercial containers of the type, size, and kind commonly used for the purpose, so constructed as to insure acceptance and safe delivery by common or other carriers at the lowest rate, to point of delivery called for in the contract or purchase order.

5.3 Marking.

5.3.1 Unit package. Each unit package shall be marked in accordance with MIL-STD-129. Contract or purchase order number, size, and name of contractor shall be shown. When the contractor is not the manufacturer, the name of the manufacturer shall also be shown

5.3.2 Exterior container Exterior container shall be marked in accordance with MIL-STD-129

NOTE The National Stock Number shall be shown in lieu of the Federal Stock Number wherever specified in MIL-STD-129 Marking shall not be required in or on polyethylene bags except for washing instructions as specified in 3.5.2.

5.3.3 Labels mixed sizes - Each shipping container packed with mixed sizes shall have securely attached to the end and side, directly under the printing or stenciling, a white paper label 5 by 4 inches with the words "MIXED SIZES" plainly stamping or printed thereon and under these words shall be legibly stamped or printed the correct quantity and sizes contained therein.

6. NOTES

6.1 Intended use The long sleeve, static resistant, cotton-polyester, woman's, surgical operating tunics covered by this specification are intended for wear by the female surgical personnel of the Medical Services

6.2 Ordering data. Procurement documents shall specify the following.

a. Title, number, and date of this specification.

b. Size and quantity desired (see 3.2).

c. Selection of applicable levels of packaging and packing (see 5.1 and 5.2).

d. Whether any special markings are required (see 5.3).

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T09:53Z
Check the source to verify that this is the current version before use.

6.3 Standard sample for shade and colorfastness. The standard sample for shade and colorfastness will be furnished by the contracting officer.

6.4 Patterns. The patterns for the tunics will be furnished by the contracting officer to the contractor for use in cutting working patterns (see 3.3.1). The pattern parts shall consist of the following

NOMENCLATURE	CUT PARTS
Front	2
Back	One
Sleeve	2
Patch Pocket	2
Facing	2

6.5 Catalog information. This specification is intended to cover the following items appearing in the Federal Supply Catalog

NATIONAL STOCK NO.	ITEM IDENTIFICATION
6532-00-149-0348	TUNIC, OPERATING, SURGICAL, WOMAN'S, Cotton-Polyester, Static-Resistant, Long Sleeves, Size Small, 12s
6532-00-149-0351	TUNIC OPERATING, SURGICAL, WOMAN'S, Cotton-Polyester, Static-Resistant, Long Sleeves, Size Medium, 12s
6532-00-149-0353	TUNIC, OPERATING, SURGICAL, WOMAN'S, Cotton-Polyester, Static-Resistant, Long Sleeves, Size Large, 12s

6.6 Commercial information. This specification does not include all types, classes, styles, or sizes of the commodity indicated by the title of this specification, or which are commercially available but is intended to cover the items, which are normally procured to meet military requirements

Custodians
Army - MD
Navy - MS
Air Force - 03


Preparing activity
Defense Supply Agency - DP

Project No. 6532-1079

Review activities
Army - MD
Navy - MS
Air Force - 03

Review information is current as of the date of this document For future coordination of changes to this document draft circulation should be based on the information in the current DODISS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T09:53Z
Check the source to verify that this is the current version before use.

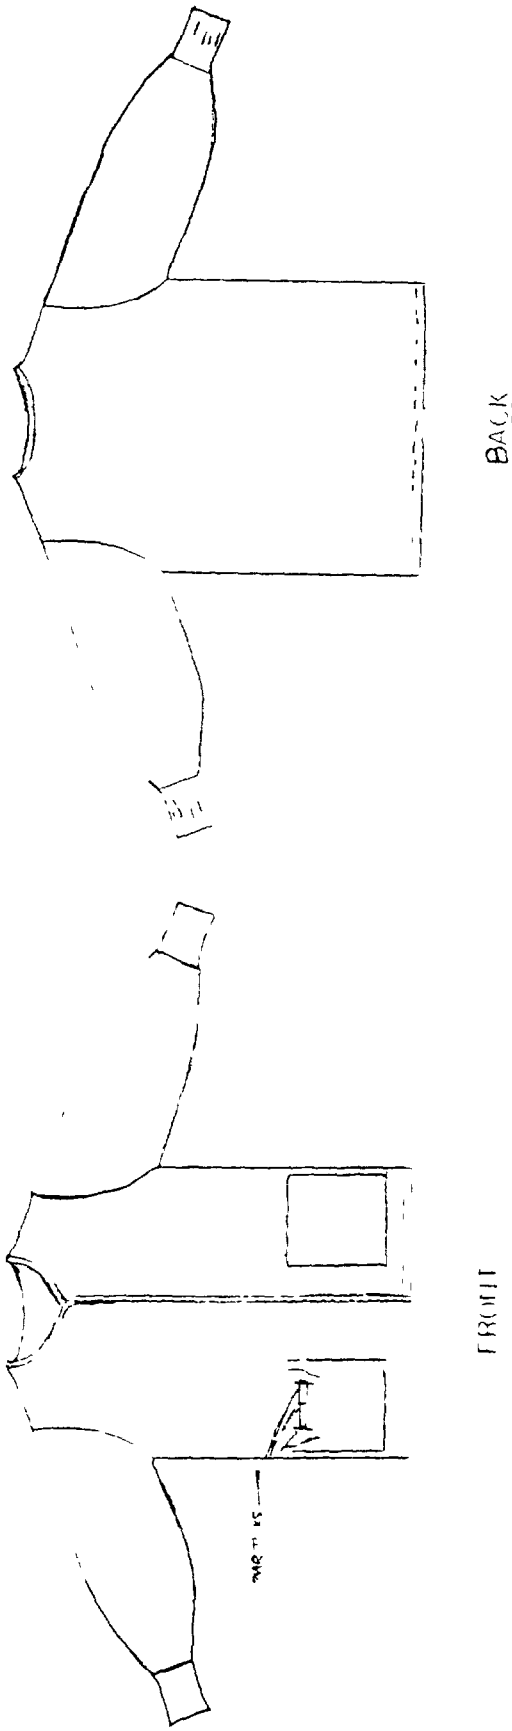

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T09:53Z
Check the source to verify that this is the current version before use.

FOLD

DEFENSE PERSONNEL SUPPORT CENTER
2800 South 20th Street
Philadelphia Pa 19101

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

POSTAGE AND FEES PAID
DEFENSE SUPPLY AGENCY
DoC 36



HEADQUARTERS, DEFENSE PERSONNEL SUPPORT CENTER
ATTN: DIRECTORATE OF MEDICAL MATERIEL, CODE ATT
2800 SOUTH 20TH STREET
PHILADELPHIA, PA 19101

FOLD

27

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T09:53Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No 22 R255

INSTRUCTIONS The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay or will otherwise enhance use of the document DoD contractors government activities or manufacturers vendors who are prospective suppliers of the product are invited to submit comments to the government Fold on lines on reverse side staple in corner and send to preparing activity Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements Attach any pertinent data which may be of use in improving this document If there are additional papers attach to form and place both in an envelope addressed to preparing activity

DOCUMENT IDENTIFIER AND TITLE

MIL-T-37064

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1 HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE

A GIVE PARAGRAPH NUMBER AND WORDING

B RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2 COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3 IS THE DOCUMENT RESTRICTIVE

☐ YES ☐ NO (If "Yes" in what way?

4 REMARKS

SUBMITTED BY (Printed or typed name and address - Optional)

TELEPHONE NO

DATE

DD FORM 1 JAN 72 1426

REPLACES EDITION OF 1 JAN 68 WHICH MAY BE USED

30

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T09:53Z
Check the source to verify that this is the current version before use.