MILITARY SPECIFICATION

TUNICS, OPERATING, SURGICAL, WOMAN'S, Cotton-Polyester, Static Resistant, Short Sleeves

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers the requirements for one type and five sizes of a short sleeve, static resistant, cotton-polyester, woman's surgical, operating room tunic.

1.2 Classification. The tunics shall be furnished in the following five sizes, as specified (see 6.2).

SIZES

26-28	30-32	34-36	38-40	42-44

2. APPLICABLE DOCUMENTS

2.1 The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein:

SPECIFICATIONS

Federal

DDD-L-20	Label, For Clothing, Equipage, and Tentage, (General Use)
PPP-B-636	Boxes, Shipping, Fiberboard
PPP-B-676	Box, Setup

Military

MIL-F-10884	Fasteners, Snap
MIL-T-43548	Thread, Polyester, Cotton-Covered
MIL-T-43624	Thread, Polyester, Spun

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T09:54Z
Check the source to verify that this is the current version before use.

STANDARDS

Federal

FED-TEST METHOD STD NO. 191	Textile Test Methods
FED-STD-751	Stitches, Seams, and Stitchings

Military

MIL-STD-105	Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129	Marking for Shipment and Storage

(Copies of specifications and standards required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications - The following document forms a part of this specification to the extent specified herein. Unless a specific issue is identified, the issue in effect on date of invitation for bids or request for proposal shall apply:

NATIONAL FIRE CODES

(Application for copies should be addressed to the National Fire Protection Association, International (NFPA), 470 Atlantic Avenue, Boston, Mass. 02110).

(Technical society and technical association specifications and standards are generally available for reference from libraries. They are also distributed among technical groups and using Federal agencies.)

3. REQUIREMENTS

3.1 Materials and components. The materials and components shall conform to the applicable specifications and standards as listed or required herein.

3.1.1 Fabric.

3.1.1.1 Tunic. The tunics shall be fabricated from a fabric having a composition of a nominal 65 percent polyester, 34 percent combed cotton, one percent austenitic type, corrosion-resistant, stainless steel fibers having a diameter of 8 microns. The fabric shall conform to Table I when inspected as specified in 4.3.1 through 4.3.1.3, as applicable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T09:54Z
Check the source to verify that this is the current version before use.

TABLE I
Cotton-Polyester Tunic Fabric Properties

Characteristics	Requirements
Weave	Plain
Ply of yarn:	
Warp	Single
Filling	Single
Yarns per inch, minimum:	
Warp	70
Filling	50
Breaking strength, pounds minimum:	
Warp	90
Filling	90
Ounces per square yard, minimum	4.8
Nonfibrous materials, percent maximum	2.0
pH	5.0 to 9.0
Shrinkage, percent maximum:	
Warp	3.0
Filling	3.0
Anti-Static properties, maximum:	
Surface resistivity, ohms per unit square	1×10^{11}
OR	
Static decay, seconds	0.5

3.1.1.1.1 Color. The color of the tunic fabric shall be a vat dyed Gravish Green shade. When inspected as specified in 4.3.1.2, the color of the cloth shall approximately match the color of the standard shade (see 6.3). The use of dyes or substances containing elementary sulfur or compounds capable of oxidation to sulfuric acid is prohibited. The dyed and finished fabric shall show not more than a slight trace of labile sulfur when inspected as specified in 4.3.1.

3.1.1.1.2 Colorfastness. When inspected as specified in 4.3.1, the dyed and finished fabric shall show fastness to light, laundering, perspiration and dry crocking equal to or better than the standard sample.

3.1.1.2 Pockets, top and undercollar and sleeves. The pockets, top and undercollar and sleeves shall be fabricated from the cotton-polyester-metallic fabric, 3.1.1.1 through 3.1.1.1.2.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T09:54Z
Check the source to verify that this is the current version before use.

3.1.3 Thread. All the sewing operations shall be performed with the cotton-covered, polyester thread conforming to MIL-T-43548, Ticket Number 70 and Ticket Number 50, 2 ply; or the spun polyester thread conforming to MIL-T-43624, Class 1 or 2, Ticket Number 70, 2 or 3 ply or Ticket Number 40, 3 ply and Ticket Number 50, 3 ply (see Table II). When spun polyester thread is used, the Ticket Number 40, 3 ply and Ticket Number 50, 3 ply may be substituted for the Ticket Number 50, 2 ply; and the Ticket Number 70, 2 or 3 ply may be substituted for the Ticket Number 70, 2 ply (see Table II). The color of the thread shall approximately match the color of the fabric, 3.1.1.1.1, when inspected as specified in 4.3.1.2.

3.1.4 Snap fasteners. The snap fasteners shall conform to MIL-F-10884, Style 3, except that the snap fasteners shall be fabricated from 300 series stainless steel.

3.1.5 Scissors holding tape. The scissors holding tape for holding two scissors shall be of a strength and construction suitable for the intended purpose. The scissors holding tape shall be undyed, untreated and fabricated from cotton. The width of the tape shall be 1/2 to 5/8 inch. The length of the tape shall conform to the patterns (see right front pattern). A certificate of quality shall be submitted for this item (see Table IV).

3.2 Design. The tunic shall be a short semi-fitted topper style garment with short set-in sleeves, snap fastener front closure, darted bodice and two patch pockets with a concealed tape for holding two scissors in the right pocket. The tunic shall conform in appearance to Figure 1.

3.3 Construction.

3.3.1 Cutting. The tunics shall be cut in strict accordance with the patterns furnished by the Government (see 6.4), which provide for seam allowance, size, shape, and placement of the pockets and scissor holding tape, directional lines for cutting, and notches for the proper assembling of all the parts. The Government patterns shall not be altered in any manner and shall be used for making the working patterns. The working patterns shall be identical to the Government furnished patterns. The component parts shall be cut from the same ply of the lay.

3.3.2 Shade and size marking. All the component parts of the tunics shall be marked or ticketed by any commercial method to insure a uniform shade and proper assembly throughout the tunic. No metal fastening device or sewn-on ticket shall be used. The shade and size markings shall be accomplished by the use of an ink pad numbering machine, rubber stamp, or pencil, provided the markings do not show through to the outerside of the tunic and are not deleterious to the cloth. The markings, which are placed on the seam allowance, shall not be visible on the outerside. The adhesive type shade and size marking tickets may be used for the shade and size markings, provided they conform to 3.3.2.1. The assembled tunic shall not contain any shade or size marking ticket nor any marking that was used for locating the position for attaching of any component.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T09:54Z
Check the source to verify that this is the current version before use.

3.3.2.1 Adhesive shade and size marking tickets - The adhesive shade and size marking tickets shall be fabricated from paper and shall contain a thermoactivated type adhesive on one side. The adhesive shall not discolor or damage the cloth and the adhesive mass shall not adhere to the cloth, upon removal of the ticket. The heat used to attach the thermoactivated adhesive tickets shall not stiffen, scorch, or damage the cloth in any manner.

3.3.3 Replacement of defective components and cut parts. Care shall be exercised during the spreading, cutting and manufacturing processes to assure that any component and cut part containing any material defect or damage that is classified in this specification as a defect shall be replaced with a non-defective and properly matched component or cut part, as applicable.

3.3.4 Seams and stitching. All the seams and stitching used in the fabrication of the tunics shall conform to Table II. The seam and stitch types shall conform to FED-STD-751. When two or more seam or stitch types are specified for the same part of the operation, the contractor may select one of them for the operation. The minimum and maximum number of stitches for each operation shall conform to Table II. When Stitch Type 401 is used, the looper thread shall be on the innerside of the garment. The right of all the overedge stitching shall be 3/16 to 7/16 inch from the edge of the cloth. The seam allowances shall be maintained so that no runoff or open seam shall occur. All seams shall start and finish uniformly. No seam or component shall be twisted, puckered, or pleated and no part of the tunic shall be caught in an unrelated operation or seam. All the thread ends shall be trimmed to a maximum length of 1/4 inch. No cut or raw edge shall be visible on the interior or exterior of the tunic.

3.3.4.1 Sewing - Each row of stitching shall be straight and parallel to the seam edge. The straightness of the stitching, in any row, shall be maintained within a tolerance of plus or minus 1/32 inch. The same tolerance for spacing and parallelism shall be applicable for the double rows of stitches. The ends of the Stitch Type 301 stitching that are not caught in other seams or stitching shall be backstitched, by overlapping on themselves, a minimum of 1/2 inch. Each thread break, skip, and run-off shall be overstitched not less than 1/2 inch. Skipped stitches or thread breaks on Stitch Type 401 stitching may be repaired using Stitch Type 301. The thread tension shall be maintained so that there shall not be any loose or tight stitching and the lock shall be embedded in the materials sewn together.

3.3.5 Manufacturing operation requirements The tunics shall be manufactured in accordance with the operation requirements specified in Table II. The supplier is not required to follow the exact sequence of operations listed, unless otherwise specified. Any additional basting or holding stitches used to facilitate the fabrication of the tunics are permissable, provided the thread does not show on the surface of the assembled tunic

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T09:54Z
Check the source to verify that this is the current version before use.

TABLE II

NO	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM CLASS AND STITCHING TYPE	STITCHES PER INCH	THREAD NEEDLE	THREAD LOOPER
1.	Hem pockets					
	a. Turn the top of the pocket down with the raw edge turned under and stitch to the pocket 1/16 to 1/8 inch from the edge of the hem. The width of the hem shall be 1 ± 1/8 inch.	301	EFb-1	8 to 12	50/2	50/2
2.	Make collar					
	a. Superimpose the face of the top collar onto the face of the undercollar. All the edges shall coincide. Stitch together the top and two sides 3/16 to 1/4 inch from the cut edges.	301	SSa-1	8 to 12	50/2	50/2
	b. Trim points and turn collar inside out so that the face sides of the cloth are on the exterior of the collar. Work out the points. The assembled collar shall not contain any folds. The collar shall finish smooth and flat.					
3.	Make darts on the fronts and backs					
	a. Fold the darts as indicated on the patterns and stitch the darts at the breast and back areas tapering to nothing.	301	OSf-1	8 to 12	50/2	50/2
	b. The darts shall be carefully tapered and shall finish smooth and flat. The breast inside fold shall finish downwards. The back inside fold shall finish towards the right.					
4.	Attach scissors holding tape to the right front					
	a. Position the scissors holding tape on the right front as indicated by the patterns. The length of the tape shall conform to the patterns (see right front pattern).					

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T09:54Z
Check the source to verify that this is the current version before use.

TABLE II (Continued)

NO	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM - STITCH NO TYPE	STITCHES PER INCH	THREAD NEEDLE	THREAD LOOPER OR CHAINER
4	(Continued)					
	b. Bartack the tape to the right front. The vertical bartacks shall be centered and located 1/4 inch from each end. The middle bartack shall be located in the center of the tape within 1/8 inch. Each bartack shall be 3/8 inch long.	Bartack		21 per bartack	50/2	50/2
5.	Set pockets					
	a. Turn under the raw edges of the side nearest the front opening and the bottom for the amount specified by the patterns and stitch to the fronts in the location and angle indicated by the patterns. The stitching shall be 1/16 to 1/8 inch from the pocket edges. The side of the pocket nearest the back shall be attached as in operation 10.	301	LSd-1	8 to 12	70/2	70/2
	b. Each attached pocket shall be 7-1/2 ± 1/4 inches wide and 7-1/2 ± 1/4 inches long. The measurements shall be taken in the approximate center of the pocket.					
	c. Bartack the upper right side corner of the left pocket and the upper left side corner of the right pocket with 3/8 inch long vertical bartacks. The bartacks shall be located 1/8 ± 1/16 inch from the side of the pocket.	Bartack		21 per bartack	50/2	50/2
6.	Join the lapels to the fronts					
	a. Overedge stitch the side of the lapels which will not be attached to the fronts.	503 504 or 505	EFa-1	8 to 12	70/2	70/2
	b. Join the lapels to the fronts in the position indicated on the side and bottom with the stitching 1/4 to 3/8 inch from the edge	301	SSa-1	8 to 12	50/2	50/2
	c. If the fronts do not utilize the selvage edge for the side to be used as the front opening facing, overedge stitch the cut edge.	503 504 or 505	EFd-1	8 to 12	70/2	70/2

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T09:54Z
Check the source to verify that this is the current version before use.

TABLE II (Continued)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM & STITCHING TYPE	STITCHES PER INCH	THREAD	
					NEEDLE	BOBBIN OR LOOPER
7.	Join the fronts to the back at the shoulders					
	a. Join each front to the back at the shoulder.	512 515 516 517 518 or 519	SSa-2 SSa-2	8 to 12 8 to 12	50/2 50/2 (chain) and 70/2 (overedge)	50/2 70/2
8.	Hem the sleeves					
	a. Turn the end of each sleeve down with the raw edge turned under and stitch to the sleeve 1/16 to 1/8 inch from the edge of the hem. The width of the hem shall be 1 ± 1/8 inch.	301	EFb-1	8 to 12	50/2	50/2
9.	Attach the sleeves					
	a. Join each sleeve to their respective armhole. The shoulder seam shall be folded towards the back. b. The ends of the armhole seam shall not be staggered by more than 1/4 inch.	512 515 516 517 518 or 519	SSa-2 SSa-2	8 to 12 8 to 12	50/2 50/2 (chain) and 70/2 (overedge)	50/2 70/2
10.	Join the sides, pockets and sleeves					
	a. Join each front to the back, each pocket, and each sleeve inseam together. The breast dart shall be folded down towards the bottom of the tunic	512 515 516 517 518 or 519	SSa-2 SSa-2	8 to 12 8 to 12	50/2 50/2 (chain) and 70/2 (overedge)	50/2 70/2
	b. Center a 3/8 inch long horizontal bartack across each sleeve inseam 1/16 to 1/8 inch from the end of each sleeve.	Bartack		21 per bartack	50/2	50/2

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T09:54Z
Check the source to verify that this is the current version before use.

TABLE II (Continued)

NO	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM & STITCHING TYPE	STITCHES PER INCH	THREAD	
					NEEDLE	BOBBIN OR LOOPER
11.	Attach collar					
	a. Fold back each lapel facing. Insert the collar between each lapel facing and front with the ends of the collar uniformly from each side (approximately 1-3/4 inches from each folded edge of each facing). Align the cut edges and join together with the stitching 1/4 to 3/8 inch from the edges till approximately to the shoulder seam (see patterns). Then attach the undercollar only from approximately the shoulder seam to approximately the other shoulder seam.	301	SSa-1	8 to 12	50/2	50/2
	b. Turn the raw edge of the unattached portion of the top collar under for approximately 1/4 inch. Place the end of each lapel facing under the top collar and stitch together and to the back with the stitches 1/16 to 1/8 inch from the turned edge. The stitching shall extend beyond each shoulder seam for approximately 2 inches.	301	LSef-2	8 to 12	50/2	50/2
	c. The difference between the length of the collar points and the difference between the side of collar at the point of attachment to the front opening edge shall be equal within 1/4 inch.					
12.	Hem the bottom of the tunic					
	a. Each front facing shall be folded back for the amount specified by the patterns. The facings shall be smooth and flat.					
	b. Fold under the bottom of the tunic with the raw edges turned under to form a hem 1-3/8 ± 1/8 inches wide. The stitching shall be 1/16 to 1/8 inch from the edge.	301	EFb-1	8 to 12	50/2	50/2

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T09:54Z
Check the source to verify that this is the current version before use.

TABLE II (Continued)

NO	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM & STITCHING TYPE	STITCHES PER INCH	THREAD	
					NEEDLE	BOBBIN OR LOOPER
13.	Attach the snap fasteners					
	a. Attach the five sockets with the pronged ring on the right exterior side of the tunic front opening in the position indicated by the patterns. The facing shall also be caught between the socket and pronged ring.					
	b. Attach the five studs with the eyelets on the left exterior side of the front opening in such a manner that they shall align and mate with the sockets without causing any distortion, twisting or puckering of the fronts. The facing shall also be caught between the studs and eyelets.					
14.	Attach labels					
	a. Position the identification label on the center of the back, on the inner-side of the tunic, within 1/2 inch, just below the collar. Attach the label on all four sides. If desired, the top edge of the identification label may be caught in the collar attaching seam.	301	LSbj-1	8 to 12	50/2	50/2
	b. Position the washing information label just below the identification label and attach on all four sides. If desired, the top edge of the washing information label may be caught in the bottom seam of the identification label. Attach the remaining three sides.	301	LSbj-1	8 to 12	50/2	50/2
15.	Trim all thread ends and remove all thread scraps and foreign matter.					
16.	Mate all the five snap fasteners and fold each tunic to an approximate size of 14 by 12 inches without creating any wrinkles or creases.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T09:54Z
Check the source to verify that this is the current version before use.

3.4 Dimensions. The tunics after assembly shall conform to the dimension for the different sizes specified in Table III when measured as specified in 4.3.5. The variation in length between the left and right sleeve dimensions shall not exceed 1/4 inch in any tunic.

TABLE III
TUNIC DIMENSIONS IN INCHES

LOCATION	SIZE					TOLERANCE
	26-28	30-32	34-36	38-40	42-44	
Bust	18	20	22	24	26	± 1/2
Waist	15	17	19	21	23	± 1/2
Hips	18-1/2	20-1/2	22-1/2	24-1/2	26-1/2	± 1/2
Length	30	30-1/4	30-3/4	31-1/4	31-1/4	± 1/2
Sweep	43-1/2	47-1/2	51-1/2	54-1/2	58-1/2	± 1
Sleeve Inseam	3-1/2	3-1/2	3-1/2	3-1/2	3-1/2	± 1/4

3.5 Labels.

3.5.1 Identification. The identification label shall conform to DDD-L-20, Type I, Class 1, Launderable Label. The size of the label shall be adequate to contain the following information:

TUNIC OPERATING, SURGICAL, WOMAN'S,
COTTON-POLYESTER, STATIC RESISTANT
MIL-T-37069
SIZE
CONTRACT OR ORDER NUMBER
NSN
WOOL OR FIBER PRODUCTS ACT INFORMATION

3.5.1.1 Alternate identification. An alternate identification label fabricated from cotton coutil or poplin cloth having a greige weight of 2.11 yards per pound (45 inch width) may be used in lieu of the label specified in 3.5.1. The printing medium and printing shall conform to DDD-L-20, Type I, Class 1, Launderable Label. The label shall contain the same information as specified in 3.5.1.

3.5.2 Washing information. The washing information label shall conform to DDD-L-20, Type I, Class 3, Launderable Label. The label shall contain the following information

1. For machine washing, use wash and wear cycle or durable press cycle. Wash with moderately hot water (140°F), using soap or mild detergent.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T09:54Z
Check the source to verify that this is the current version before use.

2. For hand washing, wash in moderately hot water as described above. DO NOT WRING OR TWIST.

3. Dry in tumble dryer at medium setting. Remove immediately at end of drying. Shape and hang.

4. To drip dry, remove from water before last spin cycle. Shape and hang.

5. If touching up is required, iron at a moderate heat setting

DO NOT REMOVE THIS LABEL

3.5.3 Washing instructions. A lightweight, white paper washing instruction label with legible and durable black characters shall be placed on top of the folded tunic prior to packaging. The paper lable shall be visible and capable of being read through the polyethylene film bag (see 5.1.3). The size of the letters and numerals shall be 10 point minimum in capitals. The size of the paper instruction label shall be at the option of the supplier. The label shall contain the following information:

WASHING INSTRUCTIONS

OPERATION	LEVEL (INCHES)	TEMPERATURE °F	TIME MINUTES	SUPPLIES PER 100 POUNDS OF GARMENTS	
1. Flush	12	Cold	3	none	
2. Suds	6	140	10	sodium metasilicate	1.5 pounds
				sodium tripolyphosphate (STPP)	0.5 pounds
				nonionic detergent 1.0 pounds	(1 pint)
				brightener (whites only)	1.0 ounces
After 10 minutes at 140°F raise to 160°F for 10 minutes					
3. Rinse	10	150	3		
4. Bleach (whites only)	10	150	5	12% sodium hypochlorite	2.0 quarts
				(rinse colors instead)	
5. Rinse	10	135	3		
6. Rinse	10	120	3		
7. Rinse	10	105	3		
8. Sour	6	Cold	5	ammonium silicofluoride	1.0 ounce

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T09:54Z
Check the source to verify that this is the current version before use.

Notes: a. Wash polyester-cotton only with polyester-cotton
b. Wash whites separately. Be sure wheel is clean
c. Load wheel only 2/3 its rated capacity

3.6 Workmanship. The tunics shall not contain any spot, stain, hole, abraded area, tear, cut, mend, patch, scorch or needle chew. The snap fasteners shall be clinched without distortion, damage, splitting, or cutting of the cloth. The metal components shall not be malformed, misaligned, fractured, broken, or distorted nor contain any corrosion, scale, pit, dent, crack, burr, sliver, or sharp edge. The tunics shall conform to the quality or grade established by this specification. The occurrence of defects shall not exceed the acceptance criteria established herein.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Material and component inspection. In accordance with 4.1, the material and components shall be inspected and tested in accordance with all the requirements of the referenced specifications and standards, unless otherwise excluded, amended, modified, or qualified in this specification or purchase document.

4.1.2 Certificate of quality. When certificates of quality are submitted in accordance with Table IV, they shall contain verifiable actual test and inspection data. The Government reserves the right to inspect and test the components to verify the validity of the certification.

4.1.3 Inspection. Inspection, as used in this specification, is defined as both examination (an investigation without the use of special laboratory apparatus or procedures such as visual) and testing (a determination by technical means of the physical and chemical properties) of the item.

4.2 Quality conformance inspection. The sampling and inspection shall conform to MIL-STD-105, except where otherwise indicated hereinafter. The quality conformance inspection shall consist of the tests and examinations specified in Table IV.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T09:54Z
Check the source to verify that this is the current version before use.

4.2.1 Sampling.

4.2.1.1 Inspection lot.

4.2.1.1.1 Tunic fabric. An inspection lot size shall be expressed in units of one linear yard of the tunic fabric and shall consist of all the tunic fabric received by the tunic manufacturer at one time. The sample unit for inspection shall be two linear yards.

4.2.1.1.2 Alternate identification label fabric. An inspection lot size shall be expressed in units of one linear yard of the alternate identification label fabric and shall consist of all the alternate identification label fabric received by the tunic manufacturer at one time. The sample unit for inspection shall be one linear yard.

4.2.1.1.3 Scissors holding tape. An inspection lot size shall be expressed in units of one linear yard of the scissors holding tape and shall consist of all the scissors holding tape received by the tunic manufacturer at one time. The sample unit for inspection shall be one linear yard.

4.2.1.1.4 Tunics. An inspection lot size shall be expressed in units of one tunic made essentially under the same conditions and from the same materials and components. The sample unit for inspection shall be one tunic.

4.2.1.1.5 Preparation of delivery. An inspection lot size shall be expressed in units of one fully prepared shipping container, containing tunics of one size, fully prepared for delivery from essentially the same materials and components. The sample unit for inspection shall be one shipping container, containing tunics of one size, fully prepared for delivery with the exception that it need not be sealed.

4.2.1.2 Sampling for tests and examinations of the tunic and alternate identification label fabrics, scissors holding tape, tunics and preparation for delivery. The sample size, acceptance criteria, tests and examinations required for the tunic and alternate identification label fabrics, scissors holding tape, tunics or the preparation for delivery, as applicable, shall be as specified in Table IV.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T09:54Z
Check the source to verify that this is the current version before use.

TABLE IV
SAMPLE SIZE, ACCEPTANCE CRITERIA, TESTS AND EXAMINATIONS REQUIRED FOR THE TUNIC AND ALTERNATE IDENTIFICATION LABEL FABRICS, SCISSOR HOLDING TAPE, TUNICS AND PREPARATION FOR DELIVERY

ITEM	INSPECTION	PARAGRAPH REQUIREMENT	METHOD	SAMPLE SIZE	ACCEPTANCE CRITERIA	
Tunic Fabric 1/	Polyester Identification	3.1.1.1	4.3.2.1	2/	2/	3/
	Cotton Identification	3.1.1.1	4.3.1	2/	2/	3/
	Stainless Steel Identification	3.1.1.1	4.3.1.1	2/	2/	3/
	Percent Polyester	3.1.1.1	4.3.1.1	2/	2/	3/
	Percent Cotton	3.1.1.1	4.3.1.1	2/	2/	3/
	Percent Stainless Steel Fiber	3.1.1.1	4.3.1.1	2/	2/	3/
	Diameter of Stainless Steel Fiber	3.1.1.1	4.3.1.1	2/	2/	3/
	Weave	3.1.1.1	4.3.1.1	2/	2/	3/
	Ply of Yarn	3.1.1.1	4.3.1.1	2/	2/	3/
	Yarns per Inch	3.1.1.1	4.3.1	2/	2/	
	Breaking Strength	3.1.1.1	4.3.1	2/	2/	
	Weight	3.1.1.1	4.3.1	2/	2/	
	Non Fibrous Materials	3.1.1.1	4.3.1	2/	2/	
	pH	3.1.1.1	4.3.1	2/	2/	
	Shrinkage	3.1.1.1	4.3.1	2/	2/	
	Anti-Static Properties	3.1.1.1	4.3.1.3	2/	2/	
	Color	3.1.1.1.1	4.3.1.2	2/	2/	3/
	Kind of Dye	3.1.1.1.1	4.3.1.1	2/	2/	3/
	Labile sulfur	3.1.1.1.1	4.3.1	2/	2/	3/
	Colorfastness To Light	3.1.1.1.2	4.3.1	2/	2/	
	Laundering	3.1.1.1.2	4.3.1	2/	2/	
	Perspiration	3.1.1.1.2	4.3.1	2/	2/	
	Dry Crocking	3.1.1.1.2	4.3.1	2/	2/	
Alternate Identification Label Fabric 1/	Cotton Identification	3.5.1.1	4.3.2	2/	2/	
	Weight	3.5.1.1	4.3.2	2/	2/	
	Kind of Fabric	3.5.1.1	4.3.2.1	2/	2/	

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T09:54Z
Check the source to verify that this is the current version before use.

TABLE IV (Cont'd)

ITEM	INSPECTION	PARAGRAPH REQUIREMENT	METHOD	SAMPLE SIZE	ACCEPTANCE CRITERIA
Scissor Holding Tape 1/	Material	3.1.5	4 3.3	2/	2/
	Breaking Strength	3.1.5	4.3.3	2/	2/
	Construction	3.1.5	4.3.3	2/	2/
Tunics	Visual Examination	3 3 through 3.3.5 and 3 5 through 3.6	4.3.4 1	Inspection Level S-4	An acceptable quality level of 2.5 defects per 100 units for Major Defects and 10.0 defects per 100 units for total (Major plus Minor) defects
	Dimensional Check	3.4	4.3.4.1	Inspection Level S-2	An acceptable quality level of 4.0 defects per 100 units
	Preparation For Delivery	Section 5	4.3.4.2	Inspection Level S-2	An acceptable quality level of 2.5 defects per 100 units

1/ The inspection of the tunic and alternate identification label fabrics and the scissors holding tape, as applicable, shall be conducted either at the contractor's or subcontractor's plant.

2/ The sampling for the testing of the tunic and alternate identification label fabric and the scissor holding tape shall be in accordance with 4.3.1.1.1 through 4.3.1.1.3, as applicable, and as follows

Lot Size (Yards)	Sample Size
800 or less	2
801 up to and including 22,000	3
22,001 and over	5

The samples shall be taken from the beginning of each roll. The lot shall be unacceptable if one or more sample units fail to meet any of the requirements specified in Table IV. Each sample unit taken for inspection shall be used to determine all the characteristics of the tunic and alternate identification label fabric and the scissors holding tape, as applicable specified in Table IV.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T09:54Z
Check the source to verify that this is the current version before use.

3/ A certificate of quality shall be submitted and will be acceptable for the stated requirement (see 4.1.2).

4.3 Inspection methods.

4.3.1 Tunic fabric. The tunic fabric characteristics shall be determined in accordance with the inspection methods of Fed-Std-191 specified in Table V and 4.3.1.1 through 4.3.1.3

TABLE V
TUNIC FABRIC PROPERTIES

CHARACTERISTIC	FED-STD-191 METHOD
Cotton Identification	1200
Yarns per inch	5050
Breaking strength	5100
Weight	5041
Nonfibrous materials	2611
pH	2811
Shrinkage	5552
Labile sulfur	2020
Colorfastness to:	
Laundering (3 cycles)	5610 1/
Light	5660
Perspiration	5680
Dry crocking	5652

1/ The staining of the cotton fiber only or the color transfer cloth shall be evaluated. The test specimen shall be dried after each laundering.

4.3.1.1 Polyester and stainless steel fiber identification, fiber content, weave, ply of yarn and kind of dye. The identification of the polyester and stainless steel fibers, fiber content, weave, ply of yarn, and the kind of dye shall be determined by any standard commercial method.

4.3.1.2 Color matching. The color of the tunic fabric and the thread shall be compared to the approved shade under natural (north sky) daylight or artificial daylight having a color temperature of 7500 degrees Kelvin

4.3.1.3 Anti-static properties The anti-static properties of the tunic fabric shall be determined in accordance with NFPA-56A.

4.3.2 Alternate identification label fabric The characteristics of the alternate identification label fabric shall be determined in accordance with the inspection methods of FED-STD-191 specified in Table VI and 4.3.2.1

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T09:54Z
Check the source to verify that this is the current version before use.

TABLE VI
ALTERNATE IDENTIFICATION LABEL FABRIC PROPERTIES

CHARACTERISTIC	FED-STD-191 METHOD
Cotton Identification	1200
Weight	5041

4.3.3.1 Kind of alternate identification label fabric. The kind of fabric used for the alternate identification label shall be determined by any standard commercial method.

4.3.3 Scissors holding tape. The scissor holding tape characteristics shall be determined in accordance with the inspection methods of FED-STD-191 specified in Table VII.

TABLE VII
SCISSORS HOLDING TAPE PROPERTIES

CHARACTERISTIC	FED-STD-191 METHOD
Cotton Identification	1200
Breaking Strength (full width)	5102
Weight	5040
Total ends	5050
Picks per inch	5050

4.3.4 Visual examination.

4.3.4.1 Tunics. Each tunic selected as a sample unit from the lot shall be thoroughly checked dimensionally and examined visually to determine conformance to this specification. The classification and list of defects, Tables VIII and IX, as applicable, shall be used to classify and enumerate the defects found.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T09:54Z
Check the source to verify that this is the current version before use.

TABLE VIII
CLASSIFICATION OF DEFECTS FOR THE VISUAL EXAMINATION
OF THE ASSEMBLED TUNICS

DEFECT	MAJOR	MINOR
GENERAL		
a. Any hole, scissors or knife cut, tear, mend, burn, or weakening defect such as smash, multiple float, loose slub, needle chew, or abraded area	X	
b. Any portion of the tunic stiffened or scorched by any process of manufacturing	X	
c. Any missing or broken yarn, thin place, misweave, woven in waste, loose yarn, snagged thread, area of no dye penetration, or dye streak on the exterior of the tunic	1/	
SNAP FASTENERS 2/		
a. Any surface rough or containing any crack, nick, burr, sharp, edge, dent or sliver	X	
b. Any surface unclean or containing embedded foreign matter		X
c. Any malformed, misaligned, corroded, fractured, broken, chipped, bent or distorted	X	
d. Any missing, loose, improperly finished, or improperly clinched resulting in cutting of the cloth	X	
e. Any mismated or misplaced causing distortion, twisting, or puckering of the fronts when mated together		X
SHADED PARTS		
a. Any part shaded or any shade bar		X
b. Color of any fibrous component not as specified or not uniform		X

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T09:54Z
Check the source to verify that this is the current version before use.

TABLE VIII (Cont'd)

DEFECT	MAJOR	MINOR
CLEANNESS		
a. Three or more thread ends not trimmed to a maximum length of 1/4 inch or three or more thread scraps not removed		X
b. Any unsightly slub, spot, or stain; any discoloration of the cloth caused by the removal of any shade and size marking ticket; any shade and size marking ticket, excluding the metal fastening or sewn-on kind, not removed; and shade and size marking identification stamping visible on the outerside of the tunic; or any shade and size marking adhesive mass adhering to the cloth		X
c. Any metal fastening device or sewn-on shade and size marking ticket attached to the tunic	X	
d. Any marking used for locating the position for attaching of any component visible on the top or underside of the tunic		X
COMPONENTS AND ASSEMBLY		
a. Any component not as specified or any defect of component or defect of assembly, not herein classified	1/	
b. Any component, component part, or required operation omitted, or any operation improperly performed, not herein classified	1/	
c. Any component part not cut in accordance with the patterns (see 3.3.1), not herein classified	1/	
d. Any dimension not as specified, not herein classified	1/	

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T09:54Z
Check the source to verify that this is the current version before use.

TABLE VIII (Cont'd)

DEFECT	MAJOR	MINOR
SEAMS AND STITCHING		
a. Accuracy of seaming:		
1. Any seam, hem, or attachment of any component twisted, puckered, or pleated, any part of the tunic or of any component caught in an unrelated operation or stitching, any seam edge not properly forced out or contains any fold		X
2. Ends of stitching that are not caught in other seams or stitching:		
(a) Any not securely backstitched	X	
(b) Any secure but backstitched for a distance less than 1/2 inch or the backstitching is not overlapped on itself		X
3. Thread breaks:		
(a) Any not securely overstitched	X	
(b) Any secure but overstitched for a distance less than 1/2 inch		X
4. Ends of any armhole seam, at the side seam, staggered by 1/2 inch or more		X
b. Gage of stitching 3/:		
1. Any stitching irregular, unevenly or not gaged as specified, or not uniform		X
c. Open seams 4/:		
1. Other than on any hem.		
(a) Any more than 1/8 inch but not more than 1/4 inch		X
(b) Any more than 1/4 inch	X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T09:54Z
Check the source to verify that this is the current version before use.

TABLE VIII (Cont'd)

DEFECT	MAJOR	MINOR
SEAMS AND STITCHING (Cont'd)		
2. On any hem:		
(a) Any more than 1/4 inch but not more than 1/2 inch		X
(b) Any more than 1/2 inch	X	
d. Raw edges 5/:		
1. Outerside of the tunic:		
(a) Any more than 1/4 inch but not more than 1/2 inch		X
(b) Any more than 1/2 inch	X	
2. Innerside of the tunic.		
(a) Any more than 1/2 inch but not more than one inch		X
(b) Any more than one inch	X	
e. Seam and stitch type:		
1. Not specified seam or stitch	1/	
2. Any looper thread on the outerside of any tunic seam, when Stitch Type 401 is used	X	
f. Stitch tension:		
1. Any loose stitching 6/	1/	
2. Any tight stitching resulting in breakage of the stitches when normal pull is applied 7/	X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T09:54Z
Check the source to verify that this is the current version before use.

TABLE VIII (Cont'd)

DEFECT	MAJOR	MINOR
SEAMS AND STITCHING (Cont'd)		
g. Stitches per inch 8/		
1. Stitches more or less than specified.		
(a) Tunic (excluding labels):		
(1) One or 2		X
(2) More than 2	X	
(b) Labels:		
(1) One to 3		X
(2) More than 3	X	
h. Bartacks.		
1. Any missing, loose, misplaced, or not serving the intended purpose	X	
2. Length of any not as specified	1/	
3. Any not located as specified	1/	
DETAILED DEFECTS APPLICABLE TO SPECIFIC PARTS OF THE TUNIC		
COLLAR		
a. Top collar or undercollar twisted any collar edge curled, or any collar end not securely tacked to the tunic		X
b. Any edge crooked undercollar edge exposed, or any corner not uniform in shape		X
c. Collar short or long causing puckering or twisting on the fronts, facing, back, or collar	X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T09:54Z
Check the source to verify that this is the current version before use.

TABLE VIII (Cont'd)

DEFECT	MAJOR	MINOR
COLLAR (Cont'd)		
a. Off center:		
1. More than 1/4 inch but not more than 3/8 inch		X
2. More than 3/8 inch	X	
e. Points uneven in length:		
1. More than 1/4 inch but not more than 3/8 inch		X
2. More than 3/8 inch		
FRONT OPENING		
a. Fronts uneven at the bottom when all the snap fasteners are mated and snapped closed:		
1. More than 1/8 inch but not more than 1/4 inch		X
2. More than 1/4 inch	X	
LAPELS AND FACINGS		
a. Any short, tight, or twisted causing puckering or twisting to any front	X	
b. Any lapel containing any fold on the outerside of the tunic	X	
c. Any lapel or facing containing any fold on the innerside of the tunic		X
SLEEVES		
a. Right sleeve in the left armhole or left sleeve in the right armhole, or any sleeve in its proper armhole installed in a reverse position	X	
b. Any pleated at any armhole seam or any tight at any armhole causing puckers on any front or back		X

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T09:54Z
Check the source to verify that this is the current version before use.

TABLE VIII (Cont'd)

DEFECT	MAJOR	MINOR
POCKETS		
a. Any pocket out of the specified angle alignment		
1. More than 1/8 inch but not more than 1/2 inch		X
2. More than 1/2 inch	X	
b. Any not of uniform size and shape		X
c. The width or length of any pocket less than 7-1/4 inches or more than 7-1/2 inches		X
d. Any corner near the front opening not rounded		X
BREAST AND BACK DARTS		
a. Any variation in length between the left and right darts of the breast or back, as applicable, by more than 1/4 inch	X	
b. Ends of breast dart not properly tapered causing a bulge		X
c. Any dart omitted	X	
d. Any breast dart that does not finish downwards		X
e. Any back dart that does not finish towards the right side		X
LABELS		
a. Identification:		
1. Size missing, incorrect, or illegible	X	
2. Other than the size information, incomplete, incorrect, or illegible		X
b. Misplaced, off center of the back by more than 1/2 inch		X
c. Stitching omitted on one or more edges		X

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T09:54Z
Check the source to verify that this is the current version before use.

TABLE VIII (Cont'd)

DEFECT	MAJOR	MINOR
LABELS (Cont'd)		
b. Washing information:		
1. Any washing information missing, incorrect, incomplete, or illegible	X	
2. Stitching omitted on one or more edges		X
3. Not located as specified		X
c. Washing instructions:		
1. Any washing instructions missing, incorrect, incomplete, or illegible	X	
2. Size of markings less than 10 points		X

1/ The defect shall be classified and scored as a major defect, when it seriously affects the serviceability or appearance, otherwise it shall be classified and scored as a minor defect.

2/ Each snap fastener shall be checked for proper function and attachment by snapping closed and unsnapping each snap fastener at least three times.

3/ The gage of stitching defect shall be scored only when the condition exists for more than 1 inches on any row of stitching.

4/ A seam shall be classified and scored as open when one or more stitches joining a seam are broken or when two or more continuous skipped stitches or run-offs occur. On double stitched seams, a seam shall be classified and scored as open when either one or both sides of the seam contain any of the aforementioned for a single stitched seam.

5/ Any edge that should be turned under and is not, but is securely caught in the stitching, shall be classified and scored as a raw edge. Any raw edge, that is not securely caught in the stitching shall be classified and scored as an open seam.

6/ A seam shall be classified and scored as loose when the top and bobbin threads are on the same surface.

7/ Puckering is evidence of tight tension or gathering of the material. When puckering is evident and is caused by the gathering of the material, the stitching shall be inspected for tight tension and breaking of stitches by exerting normal pull in the lengthwise direction of the stitching, by

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T09:54Z
Check the source to verify that this is the current version before use.

pulling the material taut to straighten out the seam. Puckering due to the gathering of the material shall be classified and scored as an accuracy of seaming defect.

8/ The stitches per inch defect shall be scored only when the condition exists for more than 3 inches on any row of stitching.

TABLE IX
LIST OF DEFECTS FOR THE DIMENSIONS OF THE ASSEMBLED TUNICS

ASSEMBLED MEASUREMENT	DEFECT
Measure the bust, waist, hips, length, sweep and sleeve inseam.	Any measurement deviating from the measurements specified in 3.4 and Table III and applicable tolerance shall be enumerated as a dimensional defect.
Equal Length	
Sleeves	The variation in length between the left and right sleeve dimension shall be enumerated as a dimensional defect when it exceeds 1/4 inch

4.3 4.2 Preparation for delivery - Each of the fully prepared shipping containers, containing tunics of one size, selected as a sample unit from the lot, shall be visually examined to determine that the packaging, packing and marking conform to this specification. The list of defects, Table X, shall be used to enumerate the defects.

TABLE X
LIST OF DEFECTS FOR PREPARATION FOR DELIVERY

ITEM	DEFECT
Exterior and interior markings	Missing, incorrect, incomplete, or illegible; of improper size, location, sequence, or method of application, size shown or any interior, or exterior container not the same, information on the paper washing instruction label or the polyethylene bag not readable through the film or no label on the polyethylene bag
Materials	Any non-conforming component any component or component part missing, damaged, or otherwise defective.
Workmanship	Inadequate application of the components such as incomplete closure of any interior or exterior container, container flap, or loose strapping; bulging or distortion of any container; any polyethylene bag damaged, any vent hole missing, or any open or non-continuous heat sealed seam.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T09:54Z
Check the source to verify that this is the current version before use.

TABLE X (Cont'd)

ITEM	DEFECT
Exterior and interior weight or content	Gross or net weight exceeds the requirement, number per container more or less than specified, more than one size tunic in the same container, any portion of the tunic caught in any heat sealed seam, any tunic distorted, deformed, or bent, any not individually packaged within the polyethylene bag.

4.3.5 Procedure for measuring The tunic to be measured shall be laid flat, without tension, on a smooth, flat surface so that any wrinkles or creases shall not affect the measurement. Unless otherwise specified, the measurements shall be made with the garment face up and with the use of a yard stick, metal tape, or by use of any suitable measuring device. The measurements shall be made as follows:

a. The chest dimension shall be taken at the base of the armholes from side seam to side seam.

b. The waist measurement shall be taken at a point of the smallest curvature, approximately at the middle snap fastener, from side seam to side seam.

c. The hips shall be measured at a point midway between the waist and bottom of the tunic from side seam to side seam.

d. The length shall be determined on the back of the garment at the center of the back from the collar attaching seam to the bottom of the tunic.

e. The sweep dimension shall be taken along the entire bottom edge of the tunic.

f. The sleeve inseam measurement shall be taken from the armhole to the bottom of the sleeve along the inseam.

5 PREPARATION FOR DELIVERY

5.1 Packaging Packaging shall be level A or C (see 6.2).

5.1.1 Unit of issue One package containing twelve tunics as specified constitutes one unit of issue.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T09:54Z
Check the source to verify that this is the current version before use.

5.1.2 Packaging quantities. The number of units of issue indicated in Table XI shall be packaged in each unit, intermediate and exterior container, as applicable, for the required level of protection specified in the procurement document.

Table XI Packaging quantities

Unit package	Intermediate package	Exterior container
1 unit	Not required	6 units

5.1.2.1 Packing variation permitted. If the required number of units in the entire shipment is less than the number of units specified to be overpacked in an exterior container, such units may be packed in an exterior container of suitable size and design, acceptable to a common carrier, which shall insure safe delivery to destination.

5.1.3 Level A.

5.1.3.1 Unit package. Each tunic shall be neatly folded to an approximate dimension of 14 inches in length and 12 inches in width. The size label shall be clearly visible in front so as to permit ready identification. Each folded tunic shall be inserted in a snug fitting, clear polyethylene bag having a maximum thickness of 0.00125 inch. A 1/4 inch diameter hole shall be made at one corner of the bag to allow excess air to escape and the closure shall be effected by heat sealing or by means of a tuck or reverse flap. Twelve tunics of the same size, individually packaged in polyethylene bags, shall be packaged in a snug fitting box constructed in accordance with PPP-B-636, class domestic or PPP-B-676 except that commercial colors are acceptable. The box closure shall be secured to prevent spilling of contents under normal handling.

5.1.4 Level C. Units shall be packaged in standard commercial containers of the size and kind commonly used, which will afford the degree of protection required for shipment and use of the product for its intended purpose.

5.2 Packing. Packing shall be level A, B, or C (see 6.2).

5.2.1 Level A.

5.2.1.1 Exterior container. Exterior container shall be designed for a type 2 load and constructed in accordance with PPP-B-636 class weather-resistant. The exterior container shall also conform to the special requirements as specified in PPP-B-636. Closure strapping and waterproofing shall be as specified in the appendix of the box specification.

NOTE: Strapping will not be required for shipments forwarded to a receiving activity within the continental limits of the United States for storage or redistribution.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T09:54Z
Check the source to verify that this is the current version before use.

5.2.2 Level B.

5.2.2.1 Exterior container. Exterior container shall be designed for a type 2 load and constructed in accordance with PPP-B-636, class domestic. The exterior container shall also conform to the special requirements as specified in PPP-B-636. Closure shall conform to method I or II as specified in the box specification.

5.2.3 Level C. The subject commodity shall be packed in substantial commercial containers of the type, size, and kind commonly used for the purpose, so constructed to insure acceptance and safe delivery by common or other carriers, at the lowest rate, to point of delivery called for in the contract or purchase order.

5.3 Marking

5.3.1 Unit package. Each unit package shall be marked in accordance with MIL-STD-129. Contract or purchase order number, size, and name of contractor shall be shown. When the contractor is not the manufacturer, the name of the manufacturer shall also be shown.

5.3.2 Exterior container. Exterior container shall be marked in accordance with MIL-STD-129.

NOTE The National Stock Number shall be shown in lieu of the Federal Stock Number wherever specified in MIL-STD-129. Marking shall not be required on polyethylene bags.

5.3.3 Labels, mixed sizes.- Each shipping container packed with mixed sizes shall have securely attached to the end and side, directly under the printing or stenciling, a white paper label 5 by 4 inches with the words "MIXED SIZES" plainly stamped or printed thereon and under these words shall be legibly stamped or printed the correct quantity and sizes contained therein.

6. NOTES

6.1 Intended use - The short sleeve, static resistant, cotton-polyester woman's, surgical, operating tunic covered by this specification is intended for wear by the female surgical personnel of the Medical Services.

6.2 Ordering data - Procurement documents shall specify the following

a. Title, number, and date of this specification.

b Size and quantity desired (see 1.2).

c Selection of applicable levels of packaging and packing (see 5.1 and 5.2

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T09:54Z
Check the source to verify that this is the current version before use.

6.3 Standard sample for shade and colorfastness. The standard sample for shade and colorfastness will be furnished by the contracting officer.

6.4 Patterns. The patterns for the tunics will be furnished by the contracting officer to the contractor for use in cutting working patterns (see 3.3.1). The pattern parts shall consist of the following.


NOMENCLATURE	CUT PARTS
Front	Two
Back	One
Sleeves	Two
Patch Pocket	Two
Collar	Two
Lapel Facing	Two

6.5 Commercial information. This specification does not include all types, classes, styles or sizes of the commodity indicated by the title of this specification, or which are commercially available, but is intended to cover the items, which are normally procured to meet military requirements.


6.6 Catalog information. This specification is intended to cover the following items appearing in the Federal Supply Catalog:

NATIONAL STOCK NO.	ITEM IDENTIFICATION
6532-00-149-0554	TUNIC, OPERATING, SURGICAL, Woman's, Cotton-Polyester, Static Resistant, Short Sleeve, Size 26-28, 12's
6532-00-149-0559	TUNIC, OPERATING, SURGICAL, Woman's, Cotton-Polyester, Static Resistant, Short Sleeve, Size 30-32, 12's
6532-00-149-0562	TUNIC, OPERATING, SURGICAL, Woman's, Cotton-Polyester, Static Resistant, Short Sleeve, Size 34-36, 12's
6532-00-149-0563	TUNIC, OPERATING, SURGICAL, Woman's, Cotton-Polyester, Static Resistant, Short Sleeve, Size 38-40, 12's
6532-00-149-0564	TUNIC, OPERATING, SURGICAL, Woman's, Cotton-Polyester, Static Resistant, Short Sleeve, Size 42-44, 12's

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T09:54Z
Check the source to verify that this is the current version before use.

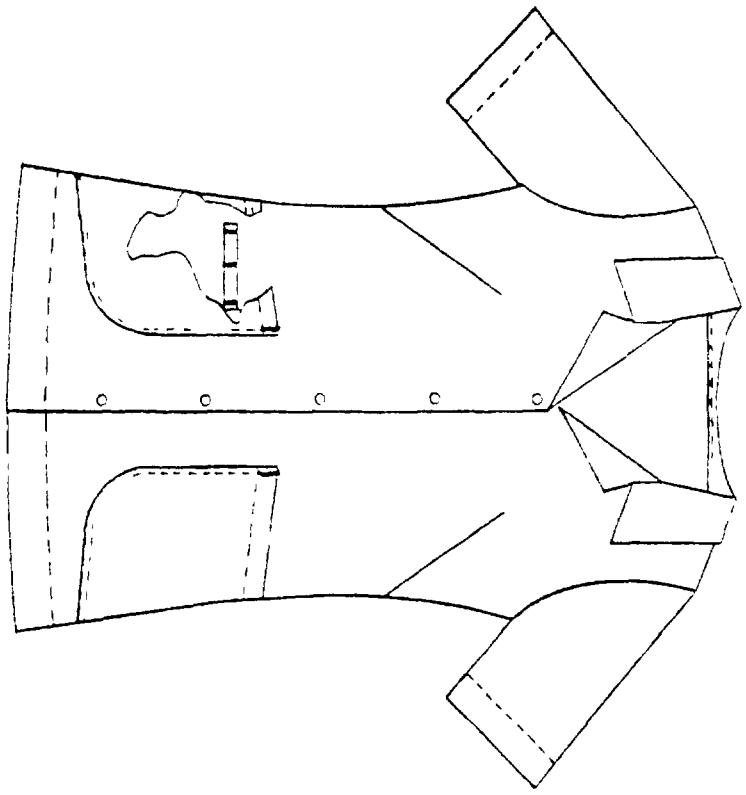

FRONT

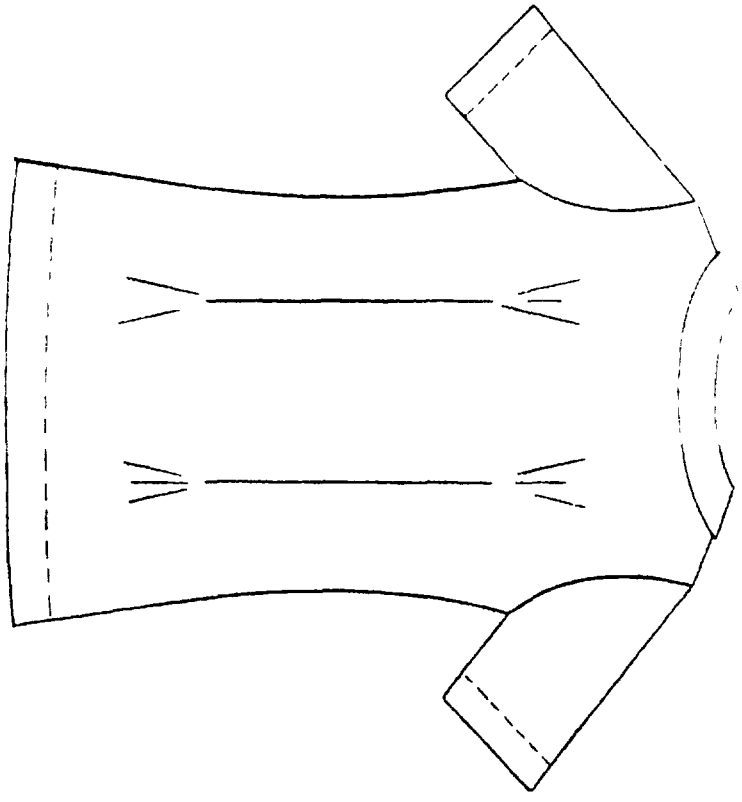

BACK

FIGURE 1

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T09:54Z
Check the source to verify that this is the current version before use.

Custodians:
Army - MD
Navy - MS
Air Force - 03

Review activities:
Army - MD
Navy - MS
Air Force - 03

Preparing activity:
Defense Supply Agency - DM

Project No. 6532-1080

Review information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DODISS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T09:54Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No 22-R255

INSTRUCTIONS The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document DoD contractors, government activities, or manufacturers/ vendors who are prospective suppliers of the product are invited to submit comments to the government Fold on lines on reverse side, staple in corner, and send to preparing activity Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements Attach any pertinent data which may be of use in improving this document If there are additional papers, attach to form and place both in an envelope addressed to preparing activity

DOCUMENT IDENTIFIER AND TITLE
MIL-T-37069

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A
☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1 HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE
A GIVE PARAGRAPH NUMBER AND WORDING

B RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2 COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3 IS THE DOCUMENT RESTRICTIVE?
☐ YES ☐ NO (If "Yes", in what way?)

4 REMARKS

SUBMITTED BY (Printed or typed name and address - Optional)

TELEPHONE NO

DATE

DD FORM 1 JAN 72 1426

REPLACES EDITION OF 1 JAN 68 WHICH MAY BE USED

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T09:54Z
Check the source to verify that this is the current version before use.

FOLD

DEFENSE PERSONNEL SUPPORT CENTER
2800 South 20th Street
Philadelphia, Pa. 19101

POSTAGE AND FEES PAID
DEFENSE SUPPLY AGENCY
DoD - 304

U.S. MAIL

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

HEADQUARTERS, DEFENSE PERSONNEL SUPPORT CENTER
ATTN: DIRECTORATE OF MEDICAL MATERIEL, CODE ATT
2800 SOUTH 20TH STREET
PHILADELPHIA, PA. 19101

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T09:54Z
Check the source to verify that this is the current version before use.