
REVIEW INTEREST: DCSC.
USER INTEREST: YD, [illegible]

FED. SUP CLASS
2805


SIDES OF RING GROOVES MUST RUN TRUE WITH PISTON PIN BORE WITHIN .002 T.I.R.

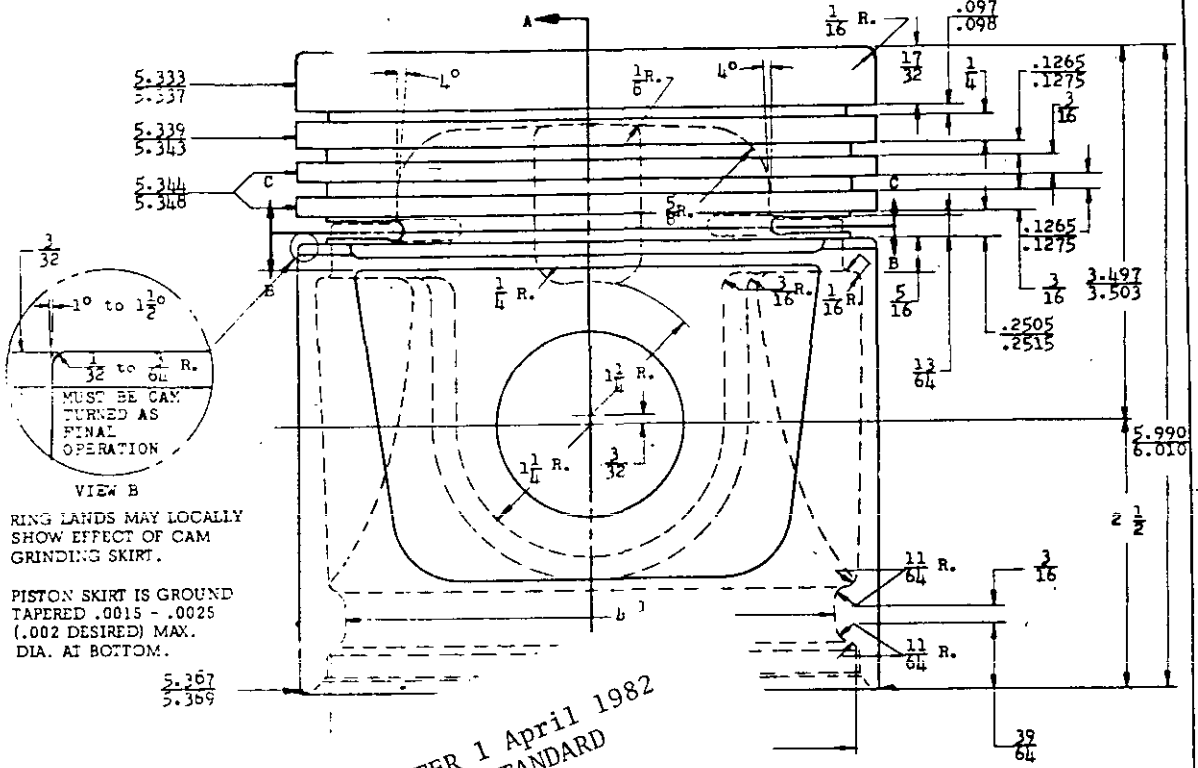

RING LANDS MAY LOCALLY SHOW EFFECT OF CAM GRINDING SKIRT.

PISTON SKIRT IS GROUND TAPERED .0015 - .0025 (.002 DESIRED) MAX. DIA. AT BOTTOM.

Ⓑ CANCELED AFTER 1 April 1982
NO SUPERSEDING STANDARD

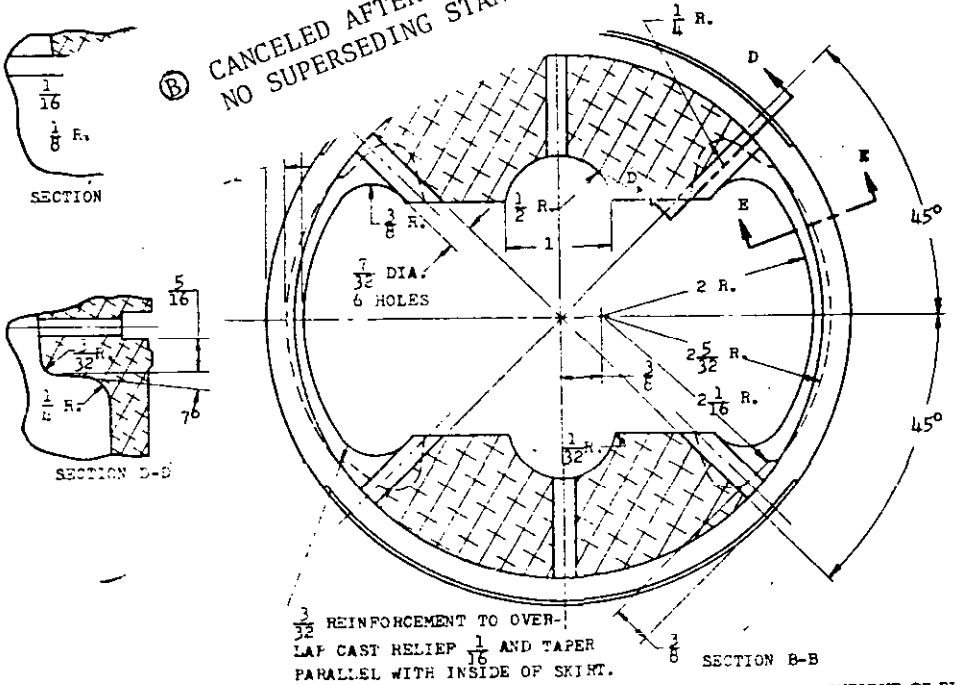

3/32 REINFORCEMENT TO OVERLAP CAST RELIEF 1/16 AND TAPER PARALLEL WITH INSIDE OF SKIRT.

WEIGHT OF FINISHED PISTON
2679 ±4 GRAMS.

Ⓐ ENTIRE STANDARD REVISED

APPROVED 24 OCTOBER 1955 REVISED Ⓐ 15 DEC 1965 Ⓑ 1 APRIL 1982

This Military Standard has been approved by the Department of Defense and is mandatory for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

PART NO. MS 13871-1

P.A. MO (ERDL) Other Cust A.F. - 49 NAVY - YD	TITLE PISTON, INTERNAL COMBUSTION ENGINE, 5-3/8" x 6" COMP. HEIGHT 3-1/2"	MILITARY STANDARD MS 13871
PROCUREMENT SPECIFICATION MIL-E-11275	SUPERSEDES	SHEET 1 OF 5

DD FORM 672-1 (Coordinated)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:30Z
Check the source to verify that this is the current version before use.