
NOTICE: When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

FED. SUP. CLASS
6240

This standard establishes the overall dimensions and detail engineering requirements for incandescent lamps, type TS-30. The item covered hereon is standard for use in the design of new equipment procured by the Bureau of Ships.

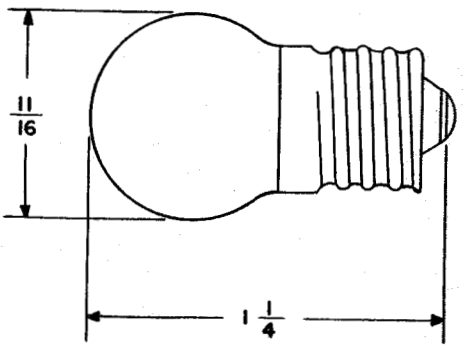

Characteristic	Type TS-30
Industry number	471
Amperes	0.26
Volts	23
Bulb	G-5-1/2
Finish	Clear
Base	Short candelabra screw
Filaments	C-2
Light center length (inches)[1]	13/16
Overall length (max. inches)	1-1/4
Hours life (approximate)	350
Use	Sperry Mk. I, II, IV-XIV Repeaters, Mk. II-V Binnacles Mk. III supply panel.

[1]Distance from center of light source to bottom base contact.

Ⓐ **CANCELED AFTER 23 JULY 1984. NO SUPERSEDING STANDARD.**

APPROVED 13 MAY 1954 REVISED Ⓐ 23 JULY 1984

MS part number	FIIN
MS15582-1	155-8713

CUSTODIANS	OTHER INT.
Ships	A - N - AF -

MILITARY STANDARD

LAMP, INCANDESCENT, G-5-1/2, SHORT CANDELABRA SCREW

MS15582
(SHIPS)

Procurement Specification

SUPERSEDES:

SHEET 1 OF 1

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:49Z
Check the source to verify that this is the current version before use.

DD FORM 672
1 OCT 52

E70305