
FED. SUP CLASS
5340

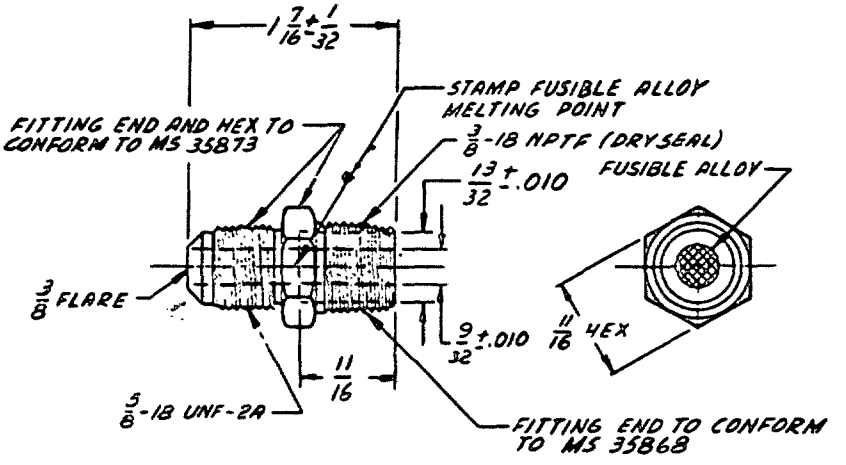


| DASH NO. | FUSIBLE ALLOY MELTING POINT RANGE (°F) |
|---|---|
| -1 | 157 - 170 |
| -2 | 208 - 220 |

NOTES

(S) 1. MATERIAL FOR BODY, BRASS BAR STOCK CONFORMING TO ASTM B-16

2. ALL DIMENSIONS IN INCHES.

3. FOR USE WITH DICHLORODIFLUOROMETHANE ($CCl_2F_2$), R-12, REFRIGERANT.

4. TO CONFORM TO UNDERWRITERS' LABORATORIES, INC. STANDARD NO. 465.

5. FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.

6. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATION FOR BID OR REQUEST FOR PROPOSAL.

7. MS PART NUMBER = MS NUMBER PLUS THE DASH NUMBER.
EXAMPLE: MS16993-1

APPROVED 15 JAN 1962 REVISED (4) 31 JAN 1969 (8) 22 JUNE, 1978

Army - MI, IS Review
Navy - MD User

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

| | | |
|---|---|---|
| P.A. GL<br>Other Cust GL 99 | TITLE<br>PLUGS, FUSIBLE, REFRIGERANT-12 | MILITARY STANDARD<br>MS16993 |
| Procurement Specification MIL-P-21769 | SUPERSEDES: | SHEET 1 OF 1 |

DD FORM 1 SEP 67 672 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:02Z
Check the source to verify that this is the current version before use.