

FED. SUP CLASS
8475

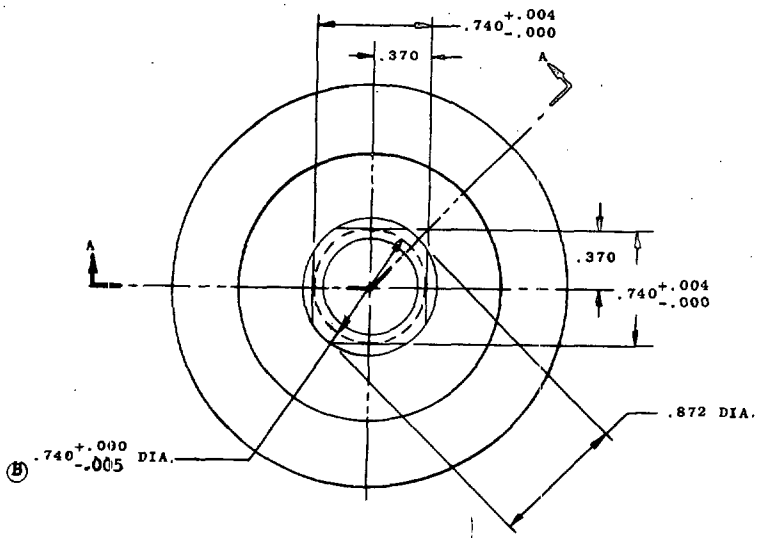

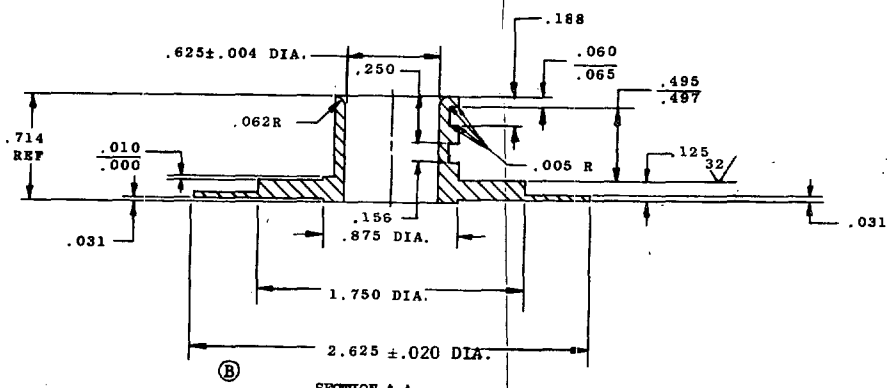

SECTION A-A

DASH NO.
-1

NOTES

1. MATERIAL: ALUMINUM ALLOY 2024 IN ACCORDANCE WITH QQ-A-225/6, TEMPER. T4.
2. FINISH: ANODIZE IN ACCORDANCE WITH MIL-A-8625, TYPE II, DYED GREEN.
3. 125 ALL OVER EXCEPT AS NOTED. SURFACE ROUGHNESS SHALL BE IN ACCORDANCE WITH Ⓑ ASA B46.1(1962)
4. DIMENSIONING AND TOLERANCING SHALL BE IN ACCORDANCE WITH MIL-STD-8.
5. DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: DECIMALS ± .005.
6. REMOVE ALL BURRS AND BREAK ALL SHARP EDGES.
7. USAGE: INTENDED FOR USE ON MK2A ANTI-G SUIT TO PROVIDE MEANS OF SECURING ANTI-G AND VENTILATION NOZZLE ASSEMBLY (MS17968) TO THE ANTI-G SUIT AND ALLOWING FREE PASSAGE OF AIR.

FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

Ⓑ REVISED

APPROVED 2 DECEMBER 63 REVISED Ⓐ 27 APR 1965 Ⓑ 21 Feb. 1967

This standard has been approved by the Naval Air Systems Command, Department of the NAVY and is mandatory for use by that activity. All other military activities are required to employ this standard where suitable.

P.A. NAVY - AS Other Cust	TITLE ANTI-G AIR INLET PORT	MILITARY STANDARD MS17971 (AS)
PROCUREMENT SPECIFICATION NONE	SUPERSEDES:	SHEET 1 OF 1

DD FORM 1 SEP 67 672-1 (Limited coordination)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

PLATE NO 14938

*U.S. GOVERNMENT PRINTING OFFICE: 1967-251-518/5157

Source: https://assist.dla.mil - Downloaded: 2026-10-29T14:11Z
Check the source to verify that this is the current version before use.