
FED. SUP CLASS
5950

RATINGS

STYLE	LT4
GRADE	1
CLASS	B
MAXIMUM OPERATING TEMPERATURE	125°C
TEMPERATURE RISE	35°C
AMBIENT TEMPERATURE	90°C
WORKING VOLTAGE	535 VOLTS
TERMINAL PULL	5 POUNDS
ALTITUDE	70,000 FEET

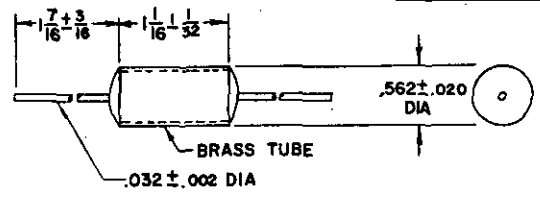

ALL DIMENSIONS IN INCHES

ELECTRICAL CHARACTERISTICS (INITIAL)

Dash No. 1/	Type designation	Replaced MS part no. MS16441 Rev. D	Replaced type designation and MS part no. for MS16441 Rev. C: Type designation	Replaced type designation and MS part no. for MS16441 Rev. C: Part No.	Inductance	Q min.	Test frequency	Self-resonant frequency, min.	DC resistance max.	Rated dc current 2/
					uh		Mc	Mc	Ohms	ma
- 1	LT4K118	MS16441-1	---	---	12.0 ±10%	32	2.5	22	0.25	1,560
- 2	LT4K119	MS16441-2	---	---	15.0 ±10%	32	2.5	20	0.36	1,300
- 3	LT4K120	MS16441-3	---	---	18.0 ±10%	33	2.5	18	0.41	1,215
- 4	LT4K121	MS16441-4	---	---	22.0 ±10%	34	2.5	17	0.56	1,040
- 5	LT4K122	MS16441-5	---	---	27.0 ±10%	35	2.5	15	0.77	890
- 6	LT4K123	MS16441-6	---	---	33.0 ±10%	35	2.5	13	1.10	740
- 7	LT4K124	MS16441-7	---	---	39.0 ±10%	35	2.5	12	1.40	660
- 8	LT4K125	MS16441-8	LT7K042	MS164[illegible]	47.0 ±10%	35	2.5	11	1.60	615
- 9	LT4K126	MS16441-9	LT7K043	MS[illegible]	56.0 ± 5%	35	2.5	10.5	2.10	540
-10	LT4K127	MS16441-10	LT7K044	[illegible]	68.0 ± 5%	35	2.5	9.6	2.60	480
-11	LT4K128	MS16441-11	LT7K045	[illegible]	82.0 ± 5%	35	2.5	8.7	2.90	460
-12	LT4K129	MS16441-12	LT7K046	[illegible]	100.0 ± 5%	35	2.5	8.0	3.20	435
-13	LT4K130	MS16441-13	LT7K047	[illegible]	120.0 ± 5%	26	0.79	7.3	3.60	410

1/ The dash number added to the basic part number constitutes the MS part number; for example MS18132-1.
2/ For the overload test, [illegible] and 1½ times the rated dc current.

CANCEL AFTER 25 AUG 72
NO SUPERCEDING DOCUMENT

ELECTRICAL CHARACTERISTICS (FINAL)

	Allowable variation from initial measurement			
	Inductance	Q	Self-resonant frequency	DC resistance
	Percent	Percent	Percent	Percent
Qualification inspection:				
Group II	2	20	2	2
Group III	2	10	2	2
Acceptance inspection:				
Group B	2	10	2	2
Group C	2	10	2	2

NOTES:
1. THE BAROMETRIC-PRESSURE TEST (TEST-CONDITION LETTER C) IS APPLICABLE.
2. INITIAL INSULATION-RESISTANCE TEST, AND INSULATION-RESISTANCE MEASUREMENTS FOLLOWING OTHER TESTS, ARE APPLICABLE.
3. THE TEMPERATURE-RISE, TERMINAL-TWIST, AND SHOCK (METHOD I, CONDITION C, 50G) TESTS ARE APPLICABLE.
4. THE POLARIZING VOLTAGE DURING THE MOISTURE-RESISTANCE TEST IS APPLIED WITH THE POSITIVE LEAD CONNECTED TO THE COIL TERMINALS TIED TOGETHER, AND THE NEGATIVE LEAD CONNECTED TO THE METAL STRAP.
5. REFERENCED DOCUMENT SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.
6. FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENT REFERENCED HEREIN.
7. VIBRATION-TEST II, TEST CONDITION B, IS APPLICABLE, IN ADDITION UNITS SHALL BE RIGIDLY MOUNTED BY THE BODY.

This military standard is approved by the Department of Defense and is mandatory on all activities. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

APPROVED 23 April 1964 REVISED (A) 25 Aug 1972

P.A. MI Other Cust FL ASD	TITLE COILS, RADIOFREQUENCY, METAL ENCASED, TYPES LT4K118 to LT4K130, INCL.	MILITARY STANDARD MS 18132
PROCUREMENT SPECIFICATION MIL-C-15305	SUPERSEDES: MS16441	SHEET 1 OF 1

☆U.S. GOVERNMENT PRINTING OFFICE:1972-714-538/1978

Source: https://assist.dla.mil -- Downloaded: 2026-10-23114:15Z
Check the source to verify that this is the current version before use.