FED. SUP CLASS. 5945

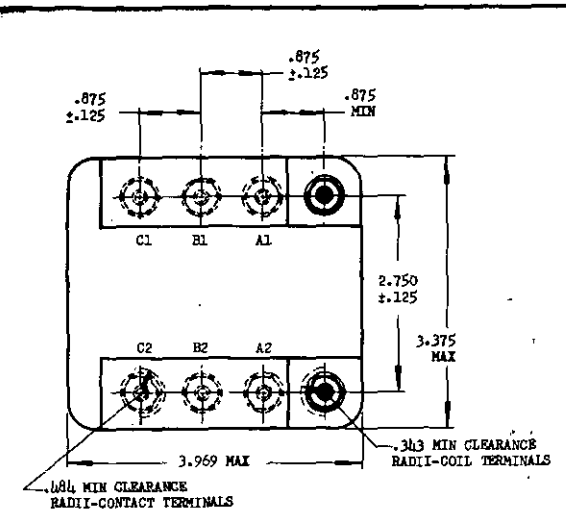

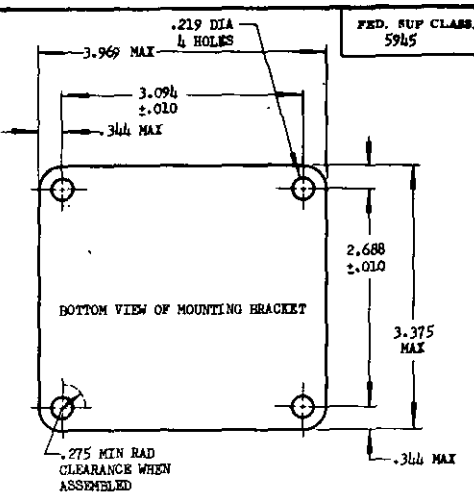

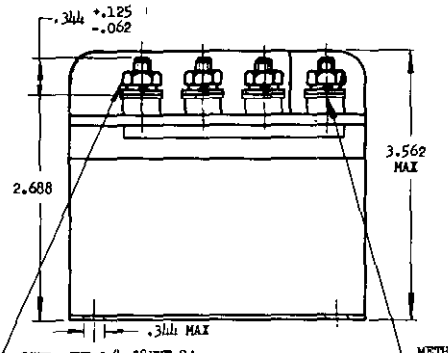

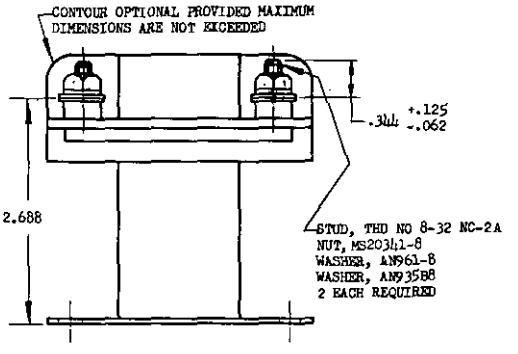

(A)	MIN OPERATING CYCLES	50,000
(B)	MAX OPERATING TIME	.025 SEC.
(D)	MAX RELEASE TIME (DC)	.015 SEC.
(E)	MAX DURATION OF CONTACT OPENING DURING SHOCK TEST	.002 SEC.
(F)	MAX CONTACT BOUNCE PERIOD	.0025 SEC.

DASH NO	COIL	WEIGHT LB MAX
D1	DC	2.5



CIRCUIT

DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: DECIMALS ±.031.

PART NUMBER MS24194D1 REPLACES PART NUMBER AN3343-1.

TERMINAL COVERS AND BARRIERS REQUIRED AT POWER TERMINALS.

COIL		NOMINAL	MAXIMUM	PICKUP	DROPOUT
DC	VOLTAGE	28	29	18	7+0, -5.5
	CURRENT		.8	3.5	
AC	VOLTAGE				
	CURRENT				

FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

(B) CANCELLED AFTER JANUARY 21, 1969, NO SUPERSEDING STANDARD.

CONTACT RATED LOAD (AMPERES PER POLE)

TYPE OF LOAD	28 VOLTS DC					115 VOLT 400-CYCLE AC					115/200 VOLT 400-CYCLE AC									
	A5	A8	B8	C8	D10	A5	A8	B8	C8	D10	A5	A8	B8	C8	D10	A5	A8	B8	C8	D10
RESISTIVE	100					100					100									
INDUCTIVE	75					75					75									
MOTOR	75					75					75									
LAMP																				
MINIMUM	10					10					10									

P.A. Navy - AS Other Cust USAF - 85	TITLE RELAY, 100 AMP, 3PST, NORMALLY OPEN, CLASS A5, UNSEALED	MILITARY STANDARD MS24194(ASG)
PROCUREMENT SPECIFICATION MIL-R-6106	SUPERSEDES: AN3343	SHEET 1 OF 1

DD FORM 672-1 (Limited coordination) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE. ☆ U.S. GOVERNMENT PRINTING OFFICE: 1968-341-517/A-4783

ASG use only

Review activities: Navy - AS USAF - 85

This military standard is approved by the Department of the Air Force and the Naval Air Systems Command and is mandatory for use by these activities. All other military activities are required to employ this standard where suitable.

APPROVED 20 Sep 67 · REVISED (A) 3 May 62 (B) 21 Jan 69

Source: https://assist.dla.mil -- Downloaded: 202610-23T14:49Z
Check the source to verify that this is the current version before use.