
NOTICE: When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specification, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

FED. SUP CLASS. 5960



SURFACE MAY BE REMOVED IN THIS AREA IF REQ'D TO MEET D.C. RESISTANCE REQUIREMENT.

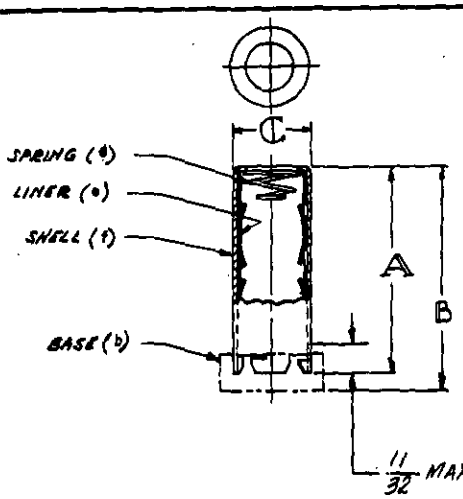

LINER LOUVERS

MS PART NO.	A ± 1/16	B MAX	C	WEIGHT GRAMS (c) MAX.	TUBE ENVELOPE STYLE	TUBE ENVELOPE LENGTH
MS24230-1	2 9/16	2.812	1.000	22	T-6½	(g)

FORMER IDENTIFICATION HTS-14

FOR USE WITH MS24231-2

(c) WEIGHT OF SHIELD ASSEMBLY LESS BASE

(d) SPRING, MATERIAL: BERYLLIUM COPPER, SPEC. QQ-C-530
FINISH: BLACK CAD. PLATE, SPEC. QQ-P-416 CLASS 1 TYPE II OPTIONAL FINISH: HENDERLUBE (OR EQUAL)
CONSTRUCTION: THE SPRING SHALL BE HELD IN PLACE BY FRICTION OR BY MECHANICAL MEANS IF THE MAX. DIA. IS SMALLER THAN THE INSIDE DIA. OF THE SHIELD. THE TENSION SHALL BE SUCH TO INSURE MAX. COMPRESSION OF 1/8 OVER SEATED TUBE. THE FORCE REQUIRED TO COMPRESS SPRING TO 3/8 SHALL BE WITHIN 11/2 TO 2 1/2 LBS. SPIRALS DO NOT TOUCH EACH OTHER. THE END OF THE COIL SPRING SHALL NOT CONTACT THE ELECTRON TUBE ENVELOPE.

(e) LINER, MATERIAL: BERYLLIUM COPPER, SPEC. QQ-C-533.
FINISH: BLACK CAD. PLATE, SPEC. QQ-P-416, CLASS 1 TYPE II, OPTIONAL FINISH: HENDERLUBE (OR EQUAL)

(f) SHELL, MATERIAL: HIGH HEAT CONDUCTING-NONMAGNETIC TYPE.
FINISH: ANODIZE DULL BLACK, SPEC. MIL-A-8625 OPTIONAL FINISH: HENDERLUBE (OR EQUAL)

(g) THIS SHIELD IS FOR USE WITH NOVAL TUBES WHICH ARE LONGER THAN USUAL TUBES. FOR EXAMPLE, TUBE TYPE 6C9H.

DIM A REFERS TO OVERALL LENGTH OF SHELL, LINER IS NOT FULL LENGTH OF SHIELD.

DIM B REFERS TO OVERALL LENGTH OF SHIELD ASSEMBLY SEATED IN BASE.

DIM C REFERS TO O.D. OF SHELL.

INSTALLATION FORCE SHALL NOT EXCEED 20 LBS TO INSTALL SHIELD OVER TUBE. NO TOOL REQUIRED FOR APPLICATION OR REMOVAL OF SHIELD FROM TUBE AND MOUNTING BASE. TOP END OF SHIELD OPEN.
ENGAGING TORQUE: 20 POUND INCHES MAX.

(D) CANCELED AFTER 17 JULY 1967
USE MIL-S-24251/3

NOTE: FOR RETROFIT, USE SHIELD MS24233-7
DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: FRACTIONS ±1/64, DECIMALS ±.005

APPROVED 29-JAN-58 REVISED (A) 11 Mar 60 (B) 3 MAY 61 (C) 8 Feb 62 (D) 17 JULY 1967

CUSTODIANS	OTHER INT.
Air Force-11	A- N- AF-

MILITARY STANDARD

SHIELD-ELECTRON TUBE-HEAT DISSIPATING (6094 TUBE ENVELOPES)

MS 24230 (USAF)

PROCUREMENT SPECIFICATION MIL-S-9372

SUPERSEDES:

SHEET 1 OF 1

DD FORM 672-1
1 OCT 52

*U.S. GOVERNMENT PRINTING OFFICE: 1967-301-510/620

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:50Z
Check the source to verify that this is the current version before use.