FED. SUP CLASS
1650, 1420

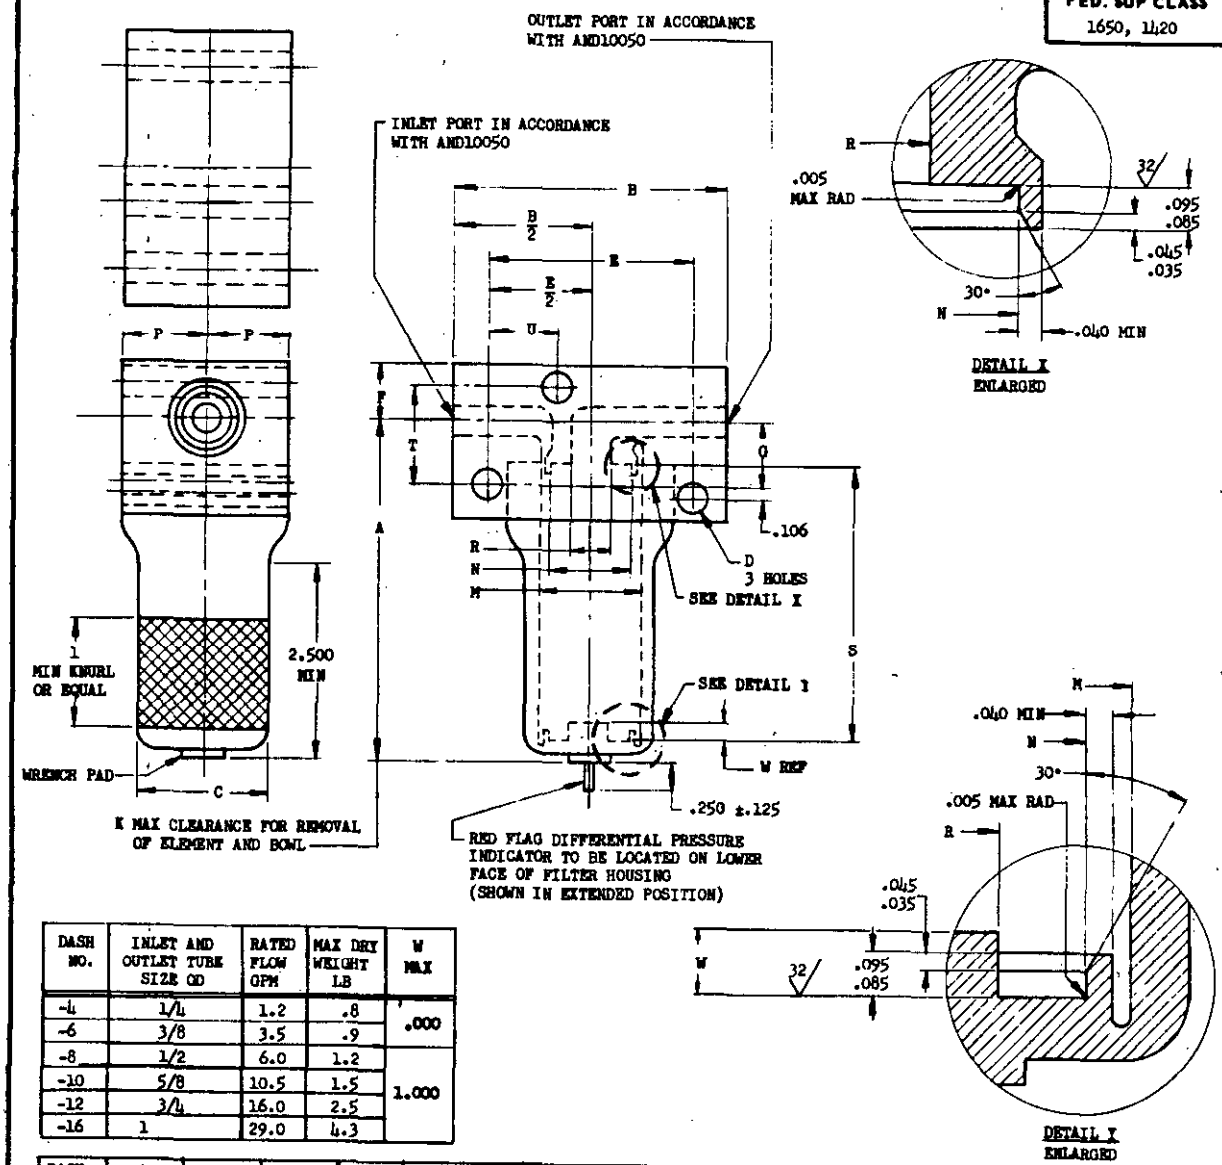

DASH NO.	INLET AND OUTLET TUBE SIZE OD	RATED FLOW GPM	MAX DRY WEIGHT LB	W MAX
-4	1/4	1.2	.8	.000
-6	3/8	3.5	.9	
-8	1/2	6.0	1.2	
-10	5/8	10.5	1.5	1.000
-12	3/4	16.0	2.5	
-16	1	29.0	4.3	

DASH NO.	A MAX	B ±.015	C MAX DIA	D DIA	E	F MAX	G ±.010	K MAX	M ±.002 DIA	N +.002 -.000 DIA	P ±.010	R MAX DIA	S ±.008	T	U
-4	4.000	2.500	1.187	.266	1.875	.500	.594	1.875	.892	.750	.750	.350	1.05	.900	.625
-6	5.625				1.937	.594	.656							1.062	.734
-8	4.875	3.062	1.562		2.437	.687	.750	2.000	1.203	.950	.850	.580	2.50	1.187	
-10	5.937	3.187	1.750		2.500	.750	.800	2.125	1.392	1.205	1.175	.608	3.45	1.312	.812
-12	7.607	3.625	1.875		2.625	.875	.900	2.250	1.516	1.250	1.218		4.75	1.500	
-16	9.250	4.187	2.500		3.500	1.000	1.050	2.750	2.016	1.760	1.516	.850	6.00	1.812	1.125

SURFACE ROUGHNESS, MIL-STD-10.
DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: DECIMALS ±.005, ANGLES ±2°.

DETAILS X AND Y ABOVE INDICATE ONLY THE CRITICAL DIMENSIONS FOR SEATING ELEMENT IN HOUSING.
DIRECTION OF FLOW AND PORT MARKING SHALL BE CLEARLY AND PERMANENTLY MARKED ON EACH SIDE.
ALL JOINTS AND SEALS SHALL BE LOCKWIRED.
FILTER INCLUDES FILTER ELEMENT MS21431.

(C) **CANCELED AFTER 23 APRIL 1975. NO SUPERSEDING STANDARD.**

FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.
REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

APPROVED 1 May 61 REVISED (A) 1 Feb 62 (B) 7 Aug 63 (C) 23 Apr 75

P.A. USAF - 11
Other Cust
Army -

TITLE
FILTER, FLUID, PRESSURE - HYDRAULIC, 3,000 PSI, ABSOLUTE 25 MICRON, STYLE A, -65°F TO +450°F

MILITARY STANDARD
MS24427
SHEET 1 OF 1

PROCUREMENT SPECIFICATION
MIL-F-25682

SUPERSEDES:

DD FORM 1 SEP 67 672-1 (Coordinated)

This military standard is approved by the Department of Defense and is mandatory on all activities. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

Source: https://assist.dla.mil -- Downloaded: 2026/10-23T14:54Z
Check the source to verify that this is the current version before use.