

FED. SUP CLASS
6610

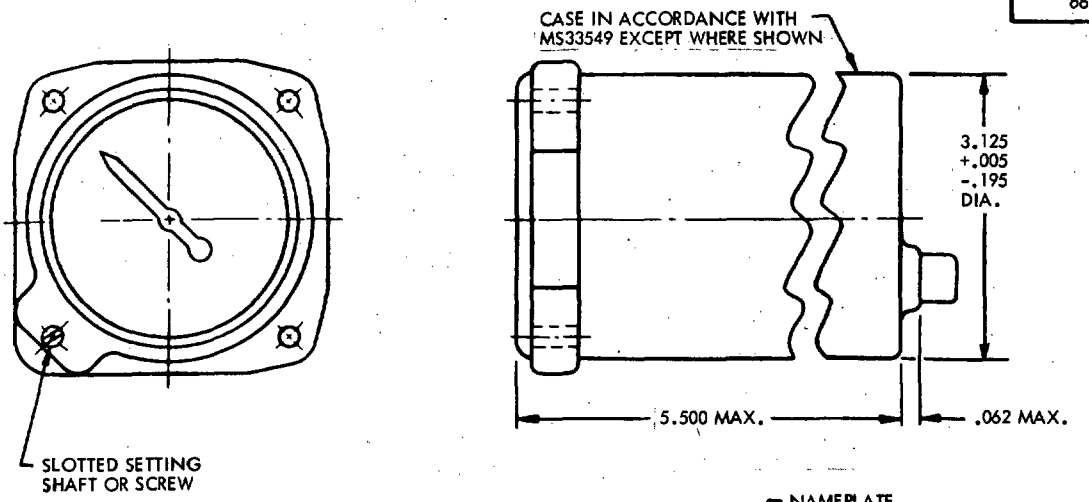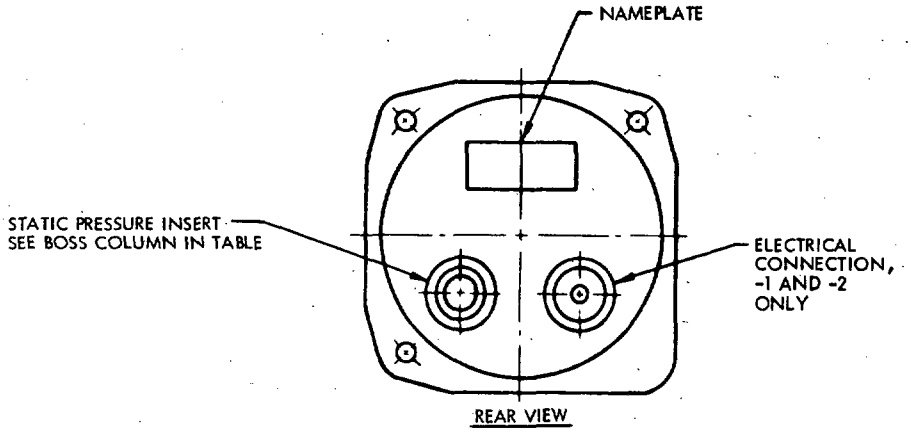


| DASH NO. | RANGE FT PER MIN | BOSS | PACKING | ELECTRICAL CONNECTION |
|---|---|---|---|---|
| -1 | 0 TO 3000 | MS33649-6 | MS28778-6 | MS3134-3P |
| -2 | 0 TO 6000 | | | |
| -3 | 0 TO 3000 | | | NONE |
| -4 | 0 TO 6000 | | | |
| © -5 | 0 TO 3000 | | | NONE |
| © -6 | 0 TO 6000 | | | |

DIMENSIONS IN INCHES:

DIAL AND POINTER SHOWN FOR REFERENCE ONLY. SEE PROCUREMENT SPECIFICATION FOR DETAIL REQUIREMENTS.

SEE PROCUREMENT SPECIFICATION FOR DETAIL REQUIREMENTS FOR MOUNTING SCREWS AND NUTS.

A REDUCER BUSHING OR ADAPTER (3/8 INCH TO 1/4 INCH) WILL BE REQUIRED WHEN THIS INSTRUMENT IS ASSEMBLED ON OLDER STATIC SYSTEMS UTILIZING 1/4 INCH OD TUBING.

© ENTIRE STANDARD REVISED

For design feature purposes, this standard takes precedence over procurement documents referenced herein.
Referenced document shall be of the issue in effect on date of invitations for bids, or request for proposal, except that referenced adopted industry documents shall give the date of the issue adopted.

APPROVED 15 MAR 60 — REVISED Ⓐ 17 JUL 62 Ⓑ 23 MAY 68 © 21 Apr 77

| P. A. ARMY-AV<br>Other Cust | INTERNATIONAL INTEREST | TITLE **INDICATORS, VERTICAL VELOCITY, RAPID RESPONSE, ACCELERATION SENSITIVE** | **MILITARY STANDARD**<br>**MS25454 (AV)** |
|---|---|---|---|
| PROCUREMENT SPECIFICATION<br>MIL-I-58067(AV) | SUPERSEDES:<br>MS25454(REV B) | | SHEET 1 OF 1 |

DD FORM 1 MAY 73 672-1 (LIMITED COORDINATION) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

Review activities: User activities:
Army - AV

This military standard is approved for use by U.S. Army Aviation Systems Command (AV), Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

Source: https://assist.dla.mil - Downloaded: 2026-10-23T15:10Z
Check the source to verify that this is the current version before use.