INCH-POUND

MS27389C
12 December 2011
SUPERSEDING
MS27389B
24 September 2003

DETAIL SPECIFICATION SHEET

ELBOW SUBASSEMBLY, FLARELESS, 45° FORGED, SWIVEL NUT

This specification is approved for use by all Departments
and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-27272.

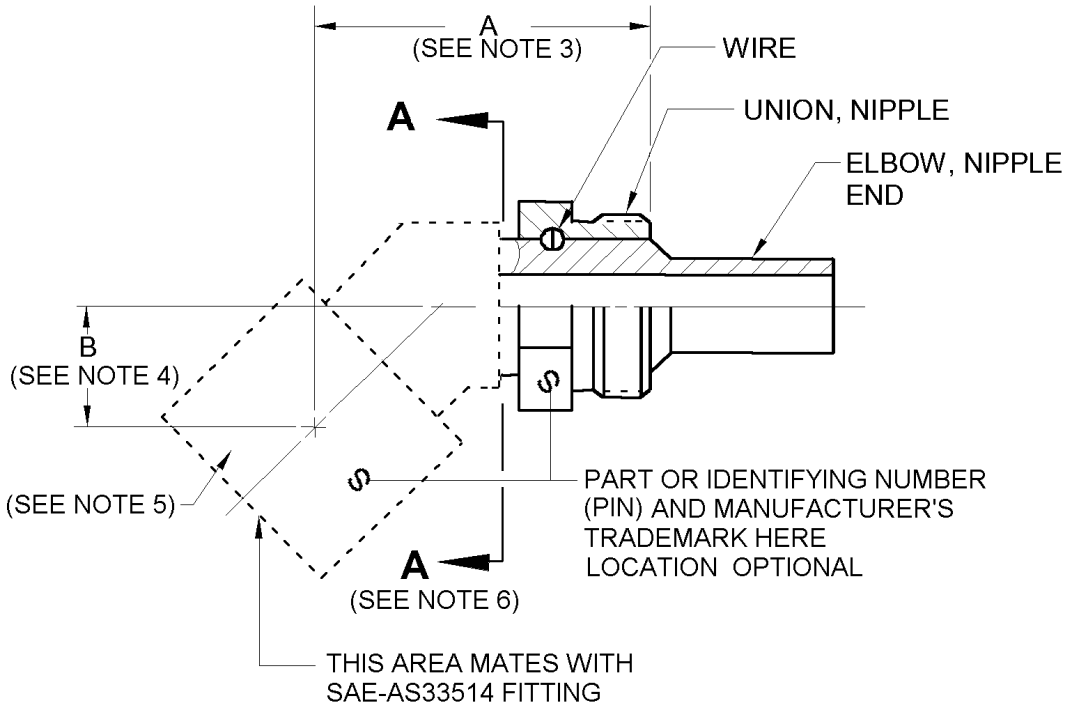


FIGURE 1. Elbow subassembly illustration.

.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:22Z
Check the source to verify that this is the current version before use.

Dash number	Wire PIN	Union, nipple PIN	Elbow, nipple end PIN	A (see note 3) ±.020 (0.51) inches (mm)	B (see note 4) ±.020 (0.51) inches (mm)
	MS27072	MS27071	MS27395		
-3/-4C (see note 6)	-4C	-4C	-3/-4C	1.227 (31.17)	.432 (10.97)
-4C			-4C	1.219 (30.96)	.424 (10.77)
-5C	-5C	-5C	-5C	1.258 (31.95)	.448 (11.38)
-6C	-6C	-6C	-6C	1.361 (34.57)	.526 (13.36)
-8C	-8C	-8C	-8C	1.877 (47.68)	.622 (15.80)
-8			-8D		

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for information only.
3. Dimension A is measured between the hose end of the threaded section of union and the free end of the insert at its centerline.
4. Dimension B is measured between the centerline of the elbow and the free end of the insert at its centerline.
5. Any forged design of adapter components to the left of plane A-A is acceptable provided the dimensions of A and B and the requirements of this specification sheet and the procurement specification are met.
6. Swivel nut and sealing surface of this elbow subassembly shall mate with SAE-AS33514-3 fitting. The remaining portion of the subassembly shall mate with M27267-4 hose.

FIGURE 1. Elbow subassembly illustration - Continued.

REQUIREMENTS

Intended use. This part is a component of MS27384.

Dimensions and configuration, see figure 1.

If required, lockwire holes to be drilled in accordance with SAE-AS1043 and suffix L added to the PIN (e.g., MS27389-8CL).

Material:

Corrosion-resistant steel.

Aluminum alloy.

See applicable specification sheet for other components identified in table I for their material requirements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:22Z
Check the source to verify that this is the current version before use.

TABLE I. Material to suffix code.

Suffix code	Material
Blank	Combination of aluminum alloy and corrosion-resistant steel.
C	Corrosion-resistant steel
D	Aluminum


Finish:

Corrosion-resistant steel, do not passivate.

Aluminum alloy. Anodize in accordance with MIL-A-8625, type II, dye yellow.

Order of precedence. This specification takes precedence over the documents referenced herein. Unless otherwise specified, referenced documents shall be of the issue in effect on the date of solicitation.

Part or Identifying Number (PIN):

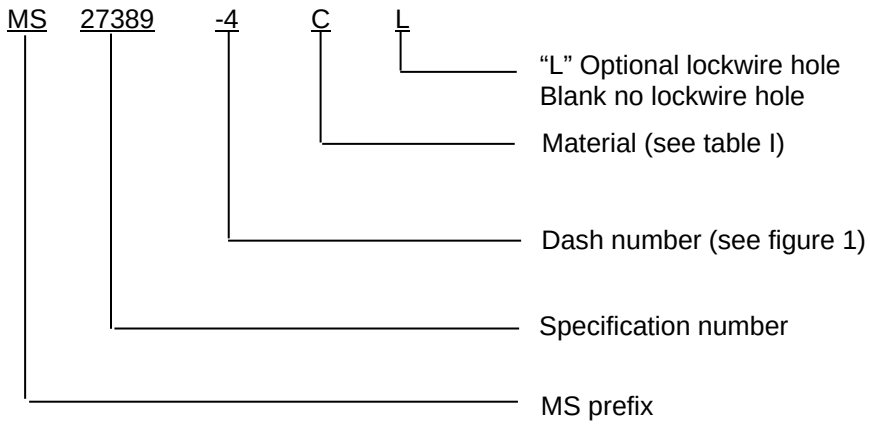

PIN examples:

MS27395-4C indicates a 45º elbow assembly that mates with an SAE-AS33514-4 fitting and a .250 inch hose, corrosion resistant steel.

MS27395-4CL indicates a 45º elbow assembly that mates with an SAE-AS33514-4 fitting and a .250 inch hose, corrosion resistant steel with lockwire hole.

Identification of product. The PIN and the manufacturer's trademark shall be permanently marked on the assembly.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:22Z
Check the source to verify that this is the current version before use.

Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue, due to the extent of the changes.

Referenced documents. In addition to MIL-DTL-27272, this document references the following:

MIL-A-8625
MS27384
SAE-AS33514
SAE-AS1043

CONCLUDING MATERIAL

Custodians:
Army - AV
Navy - AS
Air Force - 99
DLA - CC

Preparing activity:
DLA - CC

(Project 4730-2011-099)

Review activities:
Army - AT, MI
Navy - MC, SA, SH
Air Force - 71

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.daps.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:22Z
Check the source to verify that this is the current version before use.