

Proj. No. 3110-0441

FED. SUP CLASS 3110

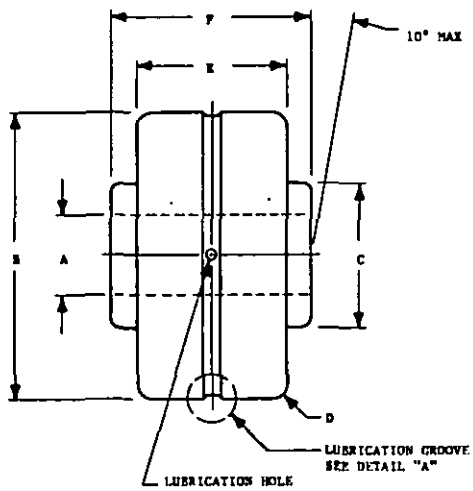

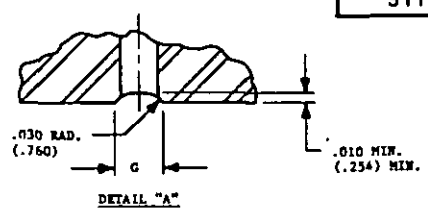

DETAIL "A"

DASH NO.	WT. MAX. LB.	STATIC LIMIT LOAD - POUNDS		DYNAMIC LOAD RATING - POUNDS	
		RADIAL	AXIAL	RADIAL	AXIAL
-4C	.21	6870	4250	5700	3525
-5C	.38	12300	7100	10200	5890
-6C	.36				
-7C	.74	19100	10400	15800	8600
-8C	.74				
-9C	1.15	29000	14500	24000	12000
-10C	1.14				
-12C	1.50	38300	18600	31700	15395
-14C	2.28	59100	29500	49000	25150

DASH NO.	A +.0000 (.000) -.0005 (.013) BORE		B +.0000 (.000) -.0005 (.013) O.D.		C +.005 (.127) -.005 (.127) DIA.		D +.015 (.381) -.000 (.000) RAD.		E +.000 (.000) -.005 (.127) WIDTH OUTER RING		F +.000 (.000) -.005 (.127) WIDTH INNER RING		G GROOVE WIDTH MIN.		LUBRICATION HOLE SIZE	
	IN.	(MM)	IN.	(MM)	IN.	(MM)	IN.	(MM)	IN.	(MM)	IN.	(MM)	IN.	(MM)	IN.	(MM)
-4C	.2500	(6.350)	1.2500	(31.750)	.490	(12.450)	.050	(1.270)	.750	(19.050)	1.000	(25.400)	.080	(2.032)	.060	(1.524)
-5C	.3125	(7.938)														
-6C	.3750	(9.525)	1.5625	(39.688)	.670	(17.020)			.844	(21.440)	1.187	(30.150)				
-7C	.4375	(11.112)	2.0000	(50.800)	.920	(23.370)			1.000	(25.400)	1.500	(38.100)	.110	(2.794)	.090	(2.286)
-8C	.5000	(12.700)														
-9C	.5625	(14.288)	2.3750	(60.325) ▲	1.000	(25.400)			1.125	(28.580)	1.687	(42.850)				
-10C	.6250	(15.875)														
-12C	.7500	(19.050)	2.6250	(66.675) ▲	1.230	(31.240)			1.250	(31.750)	1.875	(47.620)				
-14C	.8750	(22.225)	3.0000	(76.200) ▲	1.350	(34.290)			1.500	(38.100)	2.000	(50.800)				

BASIC (NOMINAL) DIAMETER		BEARING ROUNDNESS LIMITS							
		BORE ACCEPTANCE LIMITS MEAN DIAMETER				O.D. ACCEPTANCE LIMITS MEAN DIAMETER			
OVER	INCL.	d MIN	LOW	HIGH	d MAX	D MIN	LOW	HIGH	D MAX.
.0000 (.000)	2.0000(50.800)	-.0006(.015)	-.0005(.013)	+.0000(.000)	+.0001(.002)	-.0008(.020)	-.0005(.013)	+.0000(.000)	+.0003(.008)
2.0000(50.800)	4.0000(101.600)	-.0009(.023)	-.0007(.018)	+.0000(.000)	+.0002(.005)	-.0012(.030)	-.0007(.018)	+.0000(.000)	+.0005(.013)

▲ TOLERANCE ON -10, -12, -14 IS +.0000 (.000) TO -.0007 (.018)

MATERIAL: RETAINERS: STEEL, MIL-S-5626
COPPER, BERYLLIUM PER QQ-C-390
RACES AND ROLLERS: STEEL, MIL-S-7420 PER FED. STD. NO. 66
FINISH: CADMIUM PLATE, QQ-P-416, TYPE I, CLASS 2
SURFACE ROUGHNESS: RACEWAYS 4 RMR, ROLLERS 4 RMR, IN ACCORDANCE WITH ANSI B46.1 . ALL OTHER SURFACES 32 RMR.
REMOVE BURRS AND SHARP EDGES.

DIMENSIONS IN INCHES (MILLIMETERS) UNLESS OTHERWISE SPECIFIED.
TOLERANCES: DECIMALS +.010 (.250) TO -.000 (.000)
DIMENSIONS TO BE MET AFTER PLATING.

INTERNAL CLEARANCE: -4, -5, -6 AND -7 TOTAL PLAY, RADIAL .0002 (.005) TO .0010 (.025)
-8, -9, -10, -12 AND -14 TOTAL PLAY, RADIAL .0004 (.010) TO .0012 (.030)

LUBRICATION: MIL-G-81322

FOR DESIGN FEATURE PURPOSE, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.
REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

(C) ENTIRE STANDARD REVISED.

APPROVED 8 Nov 62 REVISED (A) 20 Dec 66 (B) 24 June 70 (C) 15 Nov 73

User activities: Navy - MC, CG

Review activities: Army - ME, AV, MI
Air Force - 84
DSA - IS

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A. USAF -11	TITLE	MILITARY STANDARD
Other Cust ARMY -AT NAVY -AS	BEARING, ROLLER, SELF-ALIGNING, DOUBLE ROW, WIDE INNER RING, AIRFRAME, ANTI-FRICTION, SEALED, TYPE III	MS28914
PROCUREMENT SPECIFICATION MIL-B-8914	SUPERSEDES:	SHEET 1 OF 1

DD FORM 672-1

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

GPO: U.S. GOVERNMENT PRINTING OFFICE: 1973-713-148/2526

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:00Z
Check the source to verify that this is the current version before use.