
FED. SUP CLASS.
1560

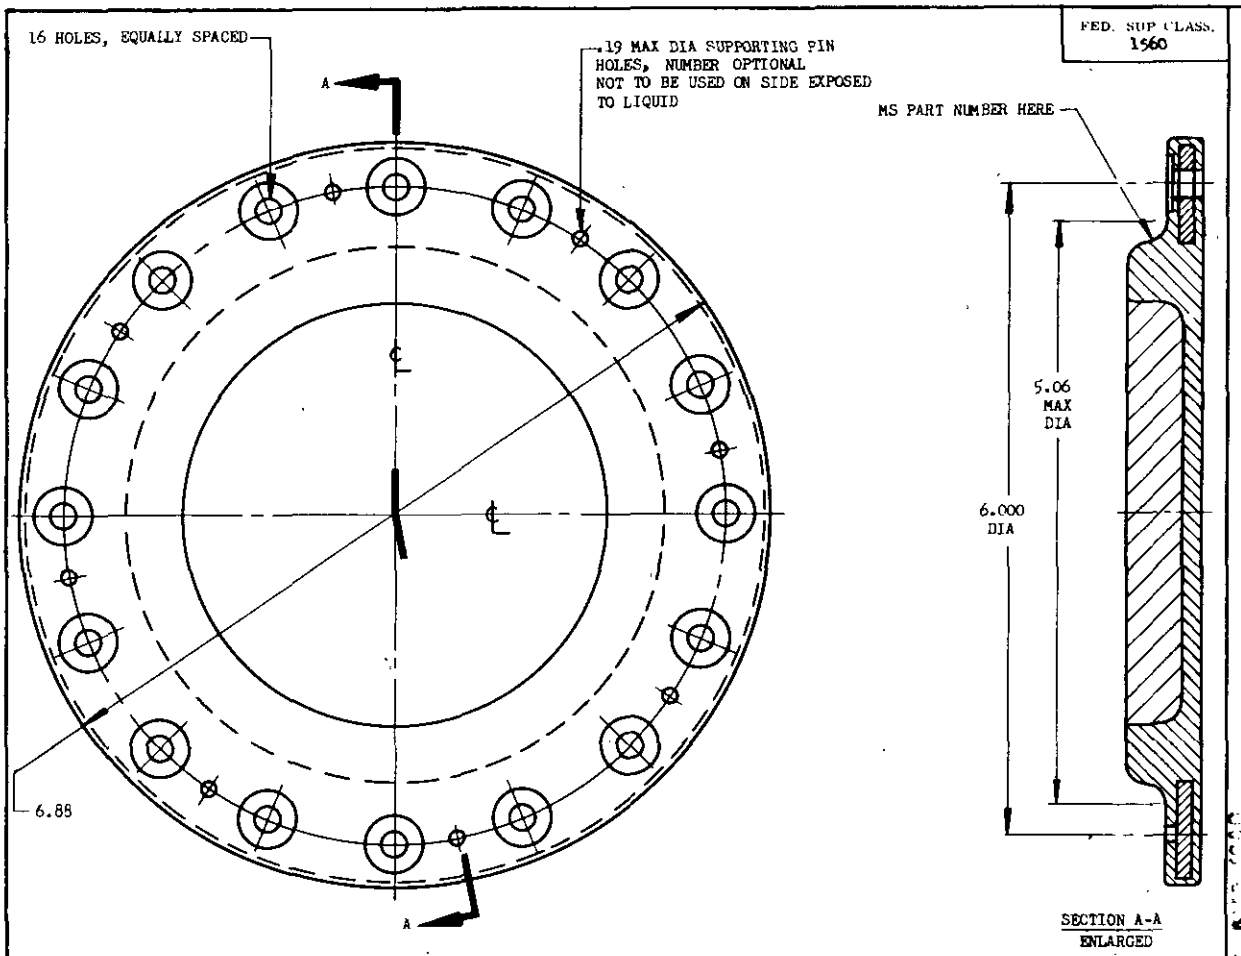

TYPE	DASH NO.	FIIN	APPLICATIONS
I	-1		SELF-SEALING FUEL AND OIL TANKS
II	-2		SELF-SEALING OIL TANKS

DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: TWO-PLACE DECIMALS ±.03, THREE-PLACE DECIMALS ±.010.

BOLT HOLES SHALL BE LOCATED WITHIN .010 OF BASIC POSITION.

COVER DESIGN IN ACCORDANCE WITH MS33595.

COVER SYMMETRICAL ABOUT CENTERLINES.

THIS STANDARD TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HEREIN.

REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

© CANCELLED after 30 OCT 1980
NO SUPERSEDING STANDARD

APPROVED 24 Feb 58 REVISED (A) 27 May 59 (B) 30 AUG 74 (C)

P.A. USAF Other Cust Army - TC Navy - Aer	TITLE COVER, ACCESS, MOLDED TANK, CIRCULAR, 5.12 DIA	MILITARY STANDARD MS29580
PROCUREMENT SPECIFICATION MIL-F-5577	SUPERSEDES: AN4134	SHEET 1 OF 1

DD FORM 1 SEP 57 672-1 (Coordinated)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

☆U.S. GOVERNMENT PRINTING OFFICE: 1980—703-023/114

NOTICE—When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

This military standard is approved by the Department of Defense and is mandatory on all activities. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:03Z
Check the source to verify that this is the current version before use.