

FED. SUP CLASS
5935

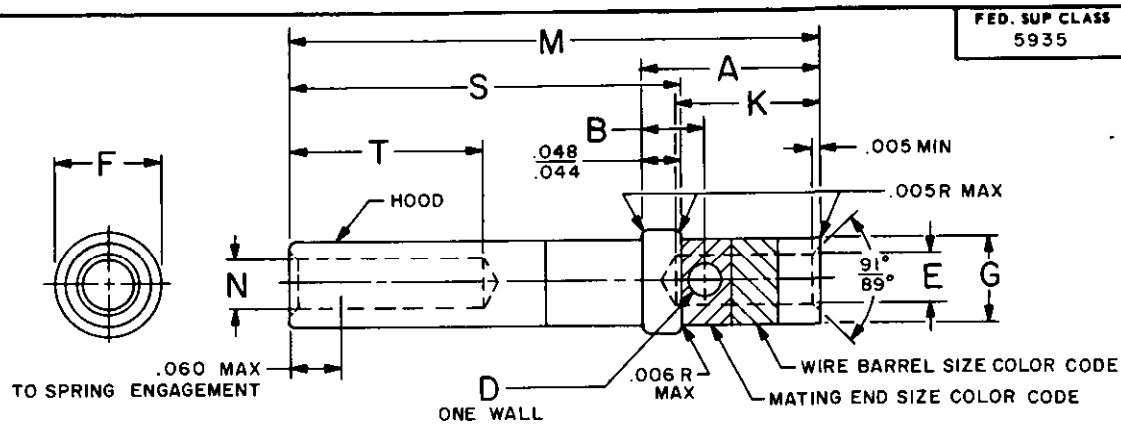

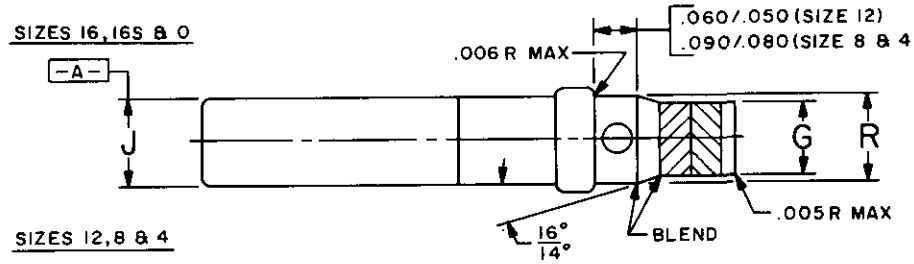

DASH NUMBER	MATING END SIZE	MATING END COLOR	WIRE BARREL SIZE	WIRE BARREL COLOR	A	B	D DIA	E DIA	F DIA	G DIA	J DIA	K	M REF	N	R	S	T
16S-16	16S	BLUE	16	BLUE	.300 .290	.079 .073	.042 .036	.068 .066	.133 .130	.103 .101	.113	.266 .250	.911	.068 .065		.666 .656	.545 .510
16-16	16	BLUE	16	BLUE									1.101			.856 .846	
12-12	12	YELLOW	12	YELLOW				.102 .098	.189 .186	.150 .147	.161			.100 .097	.160 .155		.765 .725
8-8	8	RED	8	RED	.552 .542	.094 .084	.072 .068	.183 .179	.306 .303	.265 .262	.257	.516 .485	1.342	.157 .145	.277 .272	.849 .833	.695 .655
4-4	4	BLUE	4	BLUE				.283 .279	.417 .414	.376 .373	.336			.240 .228	.389 .384		
0-0	0	YELLOW	0	YELLOW	.678 .668			.455 .451	.615 .611	.564 .561	.518	.630 .610	1.466	.372 .360			.585 .555

NOTES:
1. UNLESS OTHERWISE SPECIFIED, DIMENSIONS IN INCHES. DIMENSIONS AND TOLERANCING IN ACCORDANCE WITH USASI Y14.5-1966(ANSI).
2. DIMENSIONS SHOWN APPLY AFTER PLATING.

REQUIREMENTS:
1. MATERIAL: CONTACT-COPPER ALLOY. SOLID ROD STOCK. HOOD-STAINLESS STEEL 303 OR EQUIVALENT.
2. FINISH: CONTACT-GOLD PLATE IN ACCORDANCE WITH MIL-G-45204, TYPE 1, GRADE C OR D, CLASS 2, OVER A SUITABLE UNDERPLATING EXCEPT THAT SILVER UNDERPLATE SHALL NOT BE USED ON SIZE 16 AND 12 CONTACTS. HOOD-PASSIVATED.
3. UNLESS OTHERWISE SPECIFIED, MACHINED SURFACES SHALL BE 63 $\sqrt{}$ OR FINER IN ACCORDANCE WITH ASA B46.1-1962(ANSI).
4. DIAMETERS SHALL BE CONCENTRIC TO -A- WITHIN .004 TOTAL INDICATOR READING (T.I.R.).
5. REMOVE ALL BURRS AND SHARP EDGES .003 TO .005 R.
6. USE WITH MIL-C-005015(NAVY) REAR RELEASE CONNECTORS.
7. THIS CONTACT MATES WITH MS3162 PIN CONTACTS.
8. MAX OPERATING TEMPERATURE, 200°C.
9. FOR SIZES 8, 4 & 0 CONTACTS, USE MS25441 CRIMPING TOOL AND MS3150 CRIMPING DIES. FOR SIZES 16 & 12 CONTACTS, USE M22520/1-01 BASIC TOOL AND M22520/1-02 TURRET.
10. SIZES 8, 4 AND 0 CONTACTS ARE NOT RECOMMENDED FOR USE WITH NAVY SHIPBOARD CABLE.
11. PART NUMBER EXAMPLE: MS3163-16-16
    DASH NUMBER

FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

(C) CANCELLED AFTER 1 AUGUST 1978, USE MIL-C-39029/30

APPROVED 18 OCT 1971 REVISED (A) 5 APRIL 1972 (B) 5 SEP 1972 (C) 1 AUG 78

Review activities: NAVY-EC

This military standard is approved by the Department of the Navy and shall be used by that activity. All other military activities are required to employ this standard where suitable.

P.A. NAVY - AS Other Cust	TITLE CONTACTS, SOCKET ELECTRIC CONNECTOR, CRIMP TYPE, SIZE 0 THRU 16	MILITARY STANDARD MS3163(NAVY)
PROCUREMENT SPECIFICATION MIL-C-23216	SUPERSEDES:	SHEET 1 OF 1

DD FORM 1 SEP 67 672-1 (Limited coordination) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE. PROJECT NO. 5935-N862

☆ U.S. GOVERNMENT PRINTING OFFICE: 1978—703-122/4222

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:00Z
Check the source to verify that this is the current version before use.