FED. SUP. CLASS.
5/30

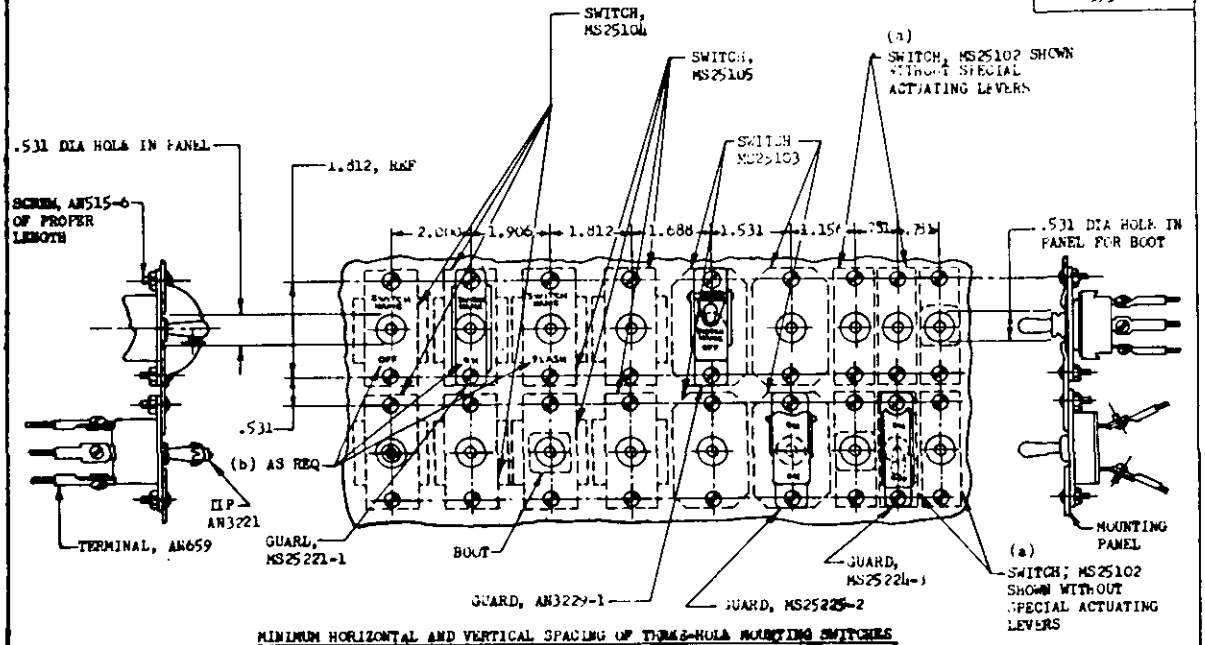

MINIMUM HORIZONTAL AND VERTICAL SPACING OF THREE-HOLE MOUNTING SWITCHES

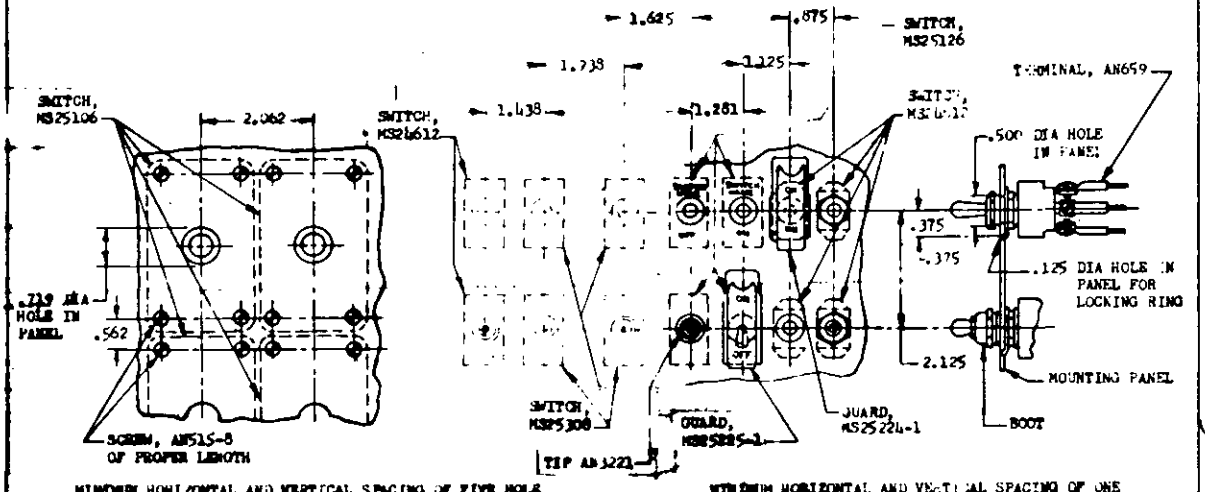

MINIMUM HORIZONTAL AND VERTICAL SPACING OF FIVE HOLE MOUNTING SWITCHES

MINIMUM HORIZONTAL AND VERTICAL SPACING OF ONE HOLE MOUNTING SWITCHES

(B) **CANCELED** AFTER 31 JULY 1984 NO SUPERSEDING STANDARD

(a) FOR SPACING OF SWITCHES HAVING SPECIAL ACTUATING LEVERS REFER TO DRAWING AN3022 FOR WIDTHS OF LEVERS.

(b) ALL PANEL MARKINGS SHALL CONFORM TO THE REQUIREMENTS OF SPECIFICATION MIL-C-13012.

REMOVE ALL ROUGH PROJECTIONS FROM HEADS OF SCREWS.

ARRANGEMENT OF SWITCHES, GUARDS, ETC AS SHOWN ON THIS DRAWING IS NOT RESTRICTIVE.

DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: DECIMALS ± .016.

THIS IS A DESIGN STANDARD. NOT TO BE USED AS A PART NUMBER.

(B) FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BIDS, OR REQUEST FOR PROPOSAL, EXCEPT THAT REFERENCED ADOPTED INDUSTRY DOCUMENTS SHALL GIVE THE DATE OF THE ISSUE ADOPTED.

(B) DENOTES CHANGES

APPROVED 7 Oct 57 REVISED (A) 6 Nov 64 (B) 31 July 1984

Reviewer: Navy - MP USAF - 85

This military standard is approved for use by Naval Air Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

P.A. Navy - MP
Other Cust
USAF - 85
(A)

PROCUREMENT SPECIFICATION NONE

MILITARY STANDARD

SWITCH, TOGGLE, INSTALLATION OF

MS33630 (ASG)

SUPERSEDES: AN110453

SHEET 1 OF 1

DD FORM 672-1 (Limited coordination)
1 OCT 52

Source: https://assist.dla.mil -- Downloaded: 202610-23T17:06Z
Check the source to verify that this is the current version before use.