INCH-POUND


MIL-DTL-55302/154C
9 March 2005
SUPERSEDING
MIL-C-55302/154B
17 November 1988

DETAIL SPECIFICATION SHEET


CONNECTORS, PRINTED CIRCUIT SUBASSEMBLY AND ACCESSORIES, MOUNTING HARDWARE FOR PRINTED WIRING BOARDS

This specification is approved for use by all Departments and Agencies of the Department of Defense.


The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-55302.

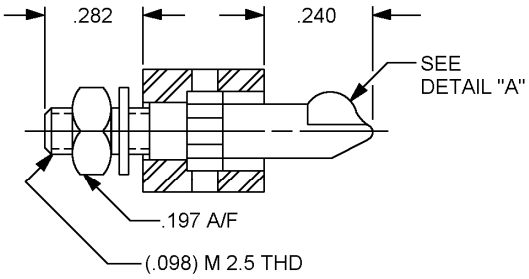


(1A & 2A) PLUG - GUIDE PIN - POLARIZED

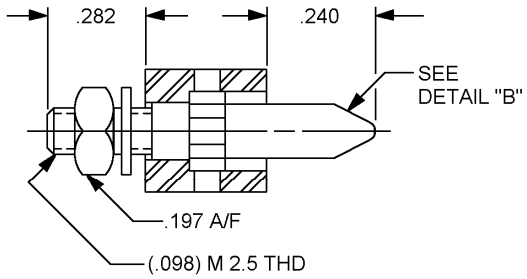

(1B & 2B) PLUG - GUIDE PIN - UNPOLARIZED

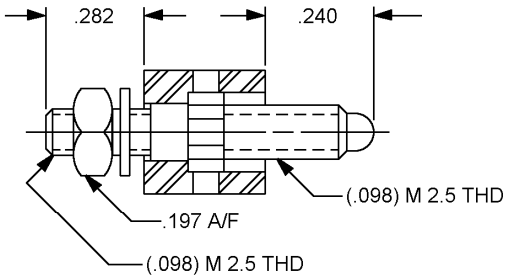


(1C & 2C) PLUG - FIXED JACKSCREW - UNPOLARIZED

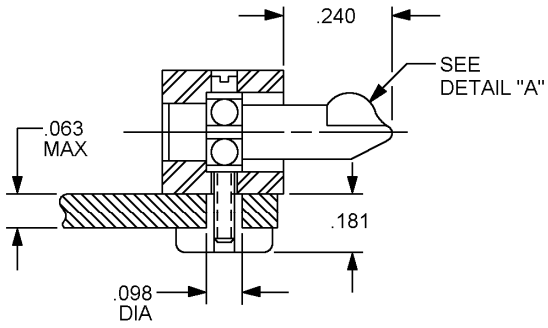


(1D & 2D) PLUG - GUIDE PIN - POLARIZED
RIGHT ANGLE PCB MOUNTING

FIGURE 1. Mounting hardware.


Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:53Z
Check the source to verify that this is the current version before use.

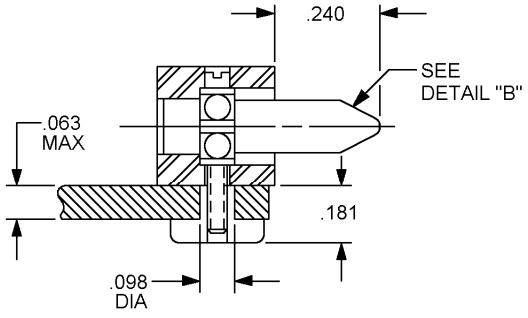


(1E & 2E) PLUG - GUIDE PIN - UNPOLARIZED
RIGHT ANGLE PCB MOUNTING

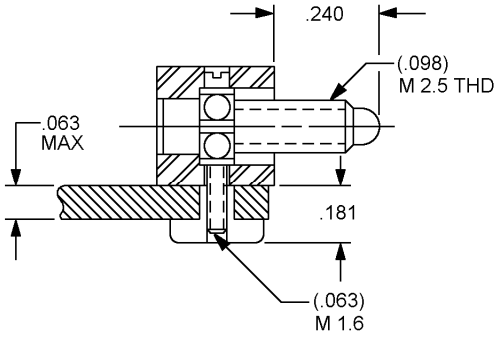


(1F & 2F) PLUG - FIXED JACKSCREW - UNPOLARIZED
RIGHT ANGLE PCB MOUNTING

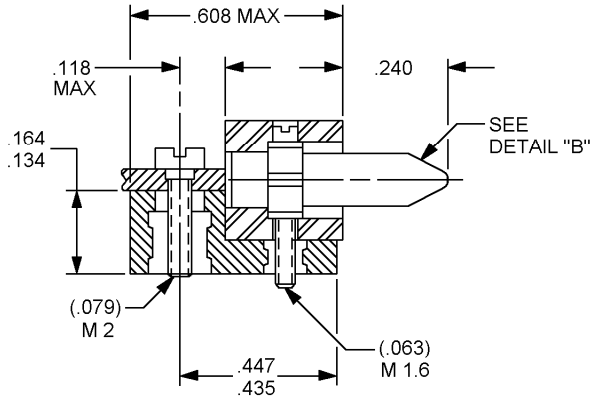


(1G & 2G) PLUG - GUIDE PIN - UNPOLARIZED
PCB EDGE MOUNTING

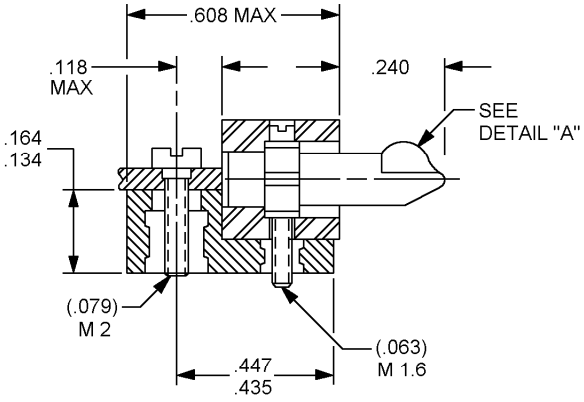

(1H & 2H) PLUG - GUIDE PIN - POLARIZED
PCB EDGE MOUNTING

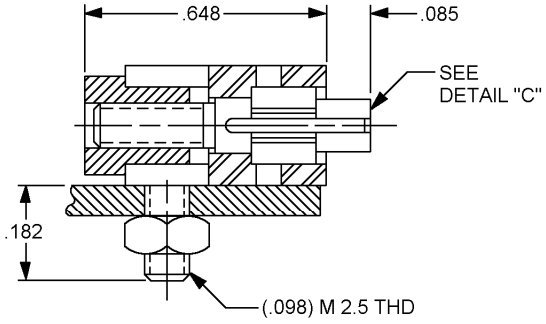


(1J & 2J) RECEPTACLE - GUIDE SOCKET - POLARIZED
RIGHT ANGLE PCB MOUNTING

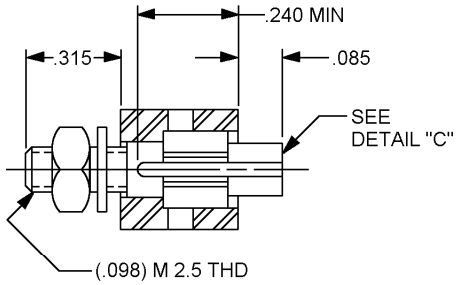


(1K & 2K) RECEPTACLE - GUIDE SOCKET - POLARIZED

FIGURE 1. Mounting hardware – Continued.


Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:53Z
Check the source to verify that this is the current version before use.

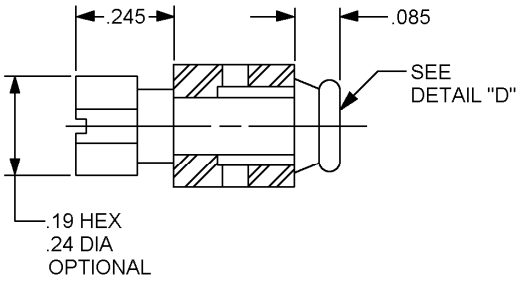


(1L & 2L) RECEPTACLE - ROTATING JACKSOCKET - UNPOLARIZED

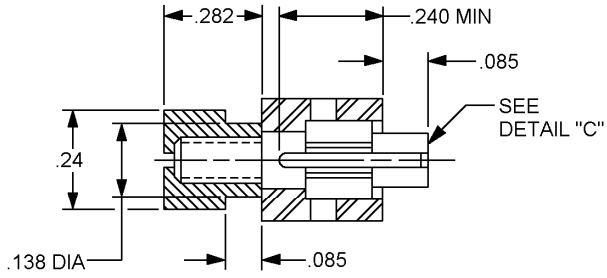


(1M & 2M) RECEPTACLE - GUIDE SOCKET - FLOATING POLARIZED

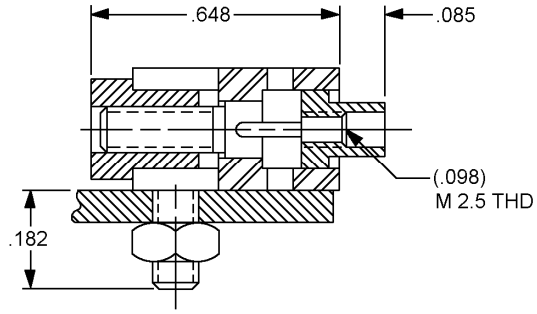


(1N & 2N) RECEPTACLE - FIXED JACKSOCKET - POLARIZED RIGHT ANGLE PCB MOUNTING

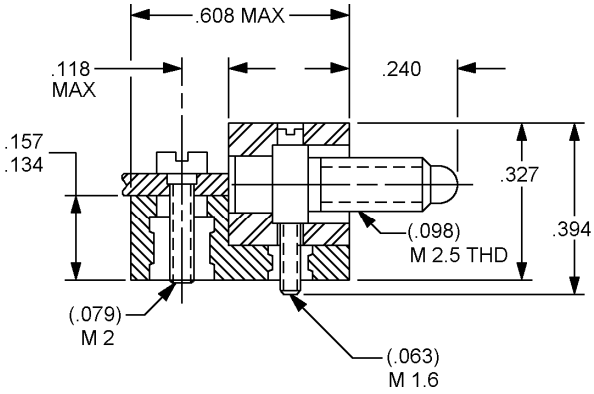

(1Q & 2Q) PLUG - FIXED JACKSCREW - UNPOLARIZED PCB EDGE MOUNTING

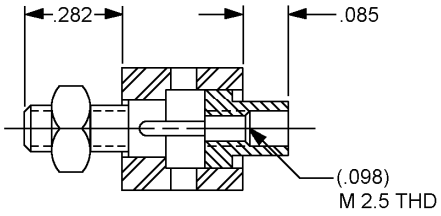


(1R & 2R) RECEPTACLE - FIXED JACKSOCKET - POLARIZED

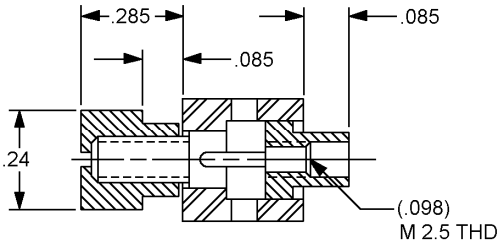


(1T & 2T) RECEPTACLE - FIXED JACKSOCKET - FLOATING POLARIZED

FIGURE 1. Mounting hardware – Continued.


Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:53Z
Check the source to verify that this is the current version before use.

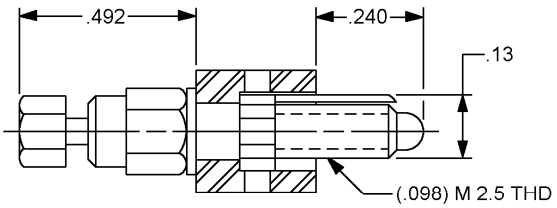


(1U & 2U) PLUG - ROTATING
JACKSCREW - POLARIZED

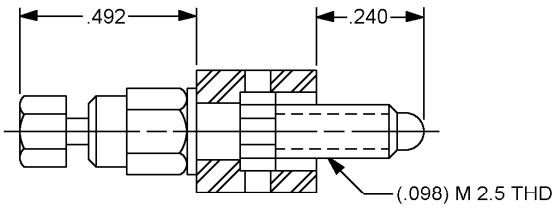


(1V & 2V) PLUG - ROTATING
JACKSCREW - UNPOLARIZED

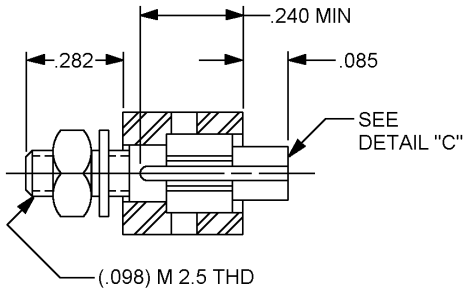


(1W & 2W) RECEPTACLE - GUIDE
SOCKET - POLARIZED (COVER)

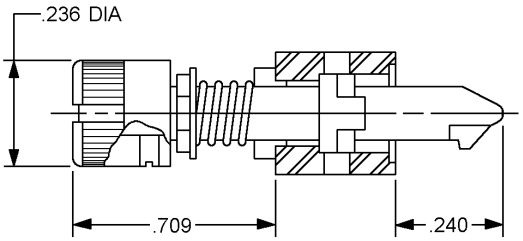


(1X) PLUG - GUIDEPIN - POLARIZED
1/4 TURN LOCKING

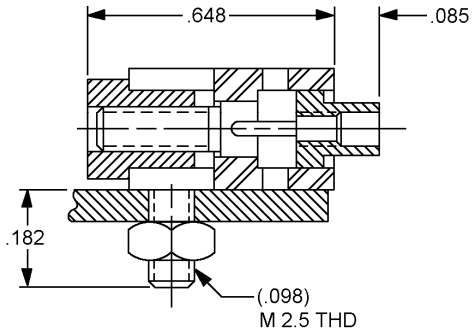

(1Y) RECEPTACLE - 1/4 TURN LOCKING
POLARIZED RIGHT ANGLE PCB MOUNTING

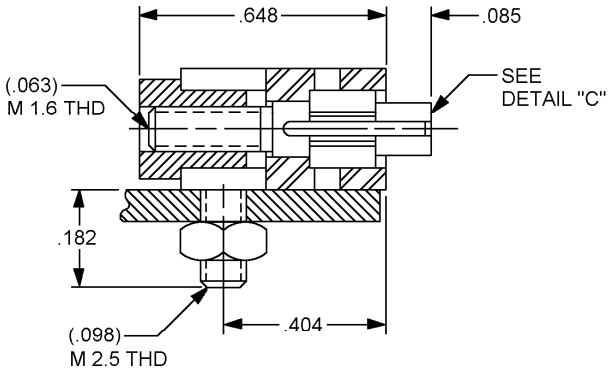

(1P & 2P) RECEPTACLE - GUIDE SOCKET - POLARIZED
RIGHT ANGLE PCB MOUNTING (COVER)

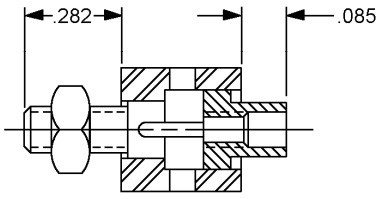

(1S) RECEPTACLE - 1/4 TURN LOCKING POLARIZED

FIGURE 1. Mounting hardware – Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:53Z
Check the source to verify that this is the current version before use.

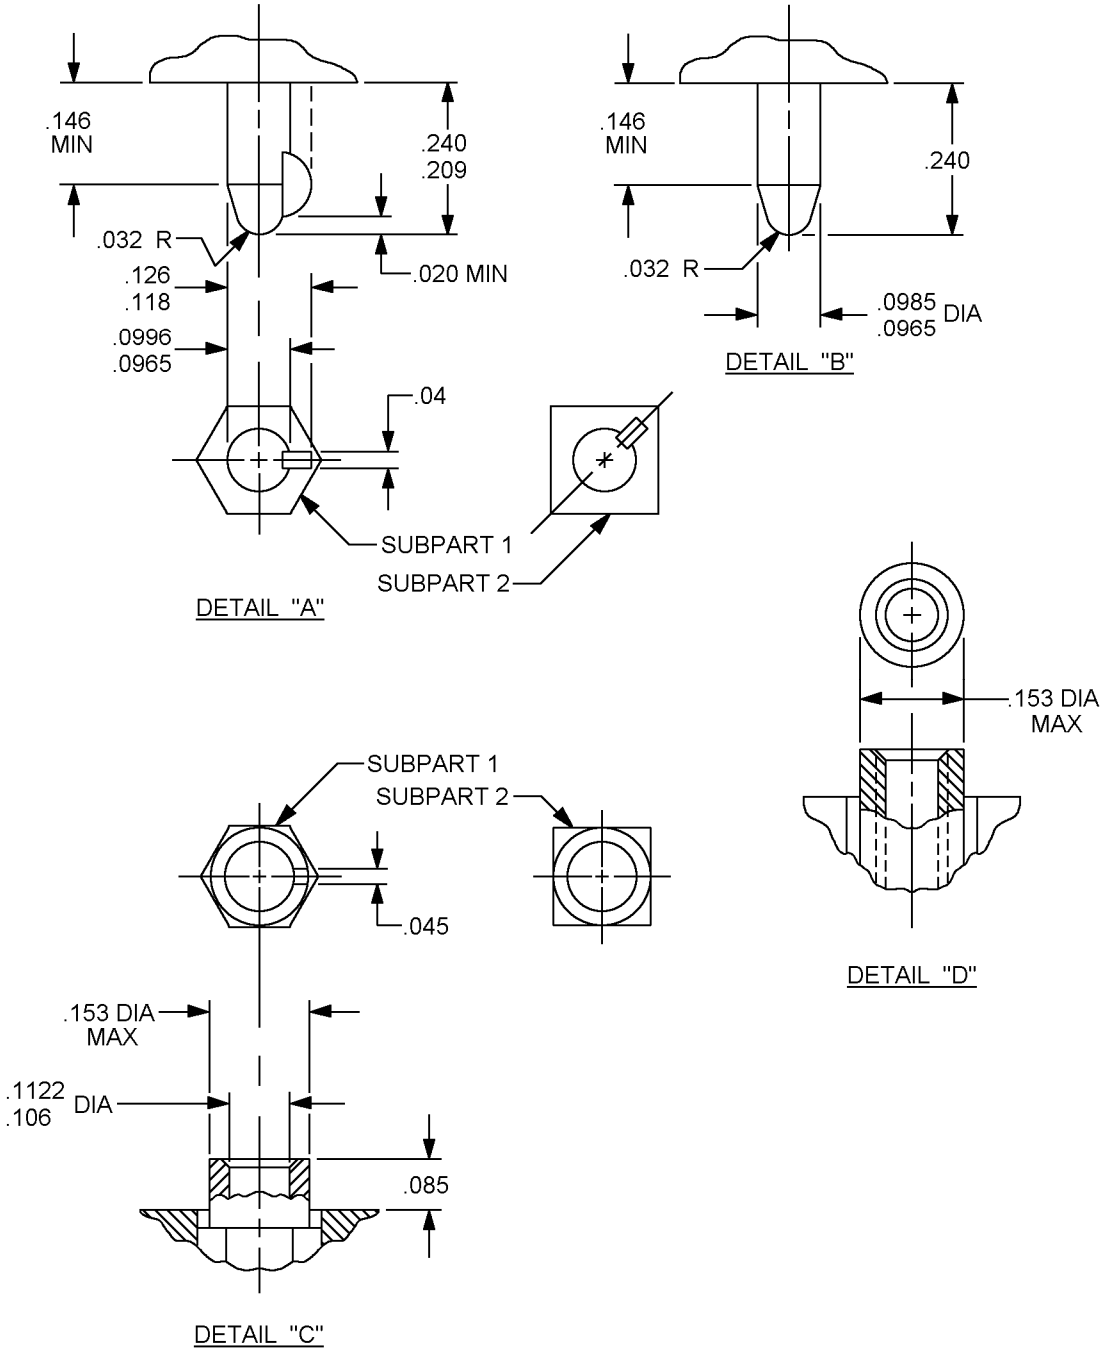


FIGURE 1. Mounting hardware – Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:53Z
Check the source to verify that this is the current version before use.

Inches	mm	Inches	mm	Inches	mm	Inches	mm
.020	0.51	.1102	2.800	.164	4.17	.285	7.24
.032	0.81	.1122	2.850	.181	4.60	.327	8.31
.04	1.0	.118	3.00	.182	4.62	.394	10.01
.0434	1.102	.126	3.20	.19	4.8	.404	10.26
.045	1.14	.13	3.3	.197	5.00	.435	11.05
.063	1.60	.134	3.40	.209	5.31	.447	11.35
.085	2.16	.138	3.51	.236	5.99	.482	12.24
.0965	2.451	.146	3.71	.240	6.10	.492	12.50
.098	2.49	.153	3.89	.245	6.22	.608	15.44
.0985	2.502	.157	3.99	.282	7.16	.648	16.46
						.709	18.01

NOTES:

1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. For lengths in hundredths, tolerance is ± .015 (0.38 mm), for lengths in thousandths, tolerance is ± .010 (0.25 mm).
4. Parts under sub part 1 have a hexagonal base with six polarizing positions. Parts under sub part 2 have a square base with four polarizing positions.
5. Only matching units of mounting hardware may be used in MIL-DTL-55302.
6. Mounting hardware type W and P are for use with MIL-DTL-55302/155 covers.
7. Unless otherwise specified, all dimensions are maximum.

TABLE I. Intermateability of hardware.

	Plug												
Receptacle		A	B	C	D	E	F	G	H	Q	U	V	X
	J	X	X		X	X		X	X				
	K	X	X		X	X		X	X				
	L			X			X			X			
	M	X	X		X	X		X	X				
	N										X	X	
	R										X	X	
	T										X	X	
	Y												X
	S												X

X-mates

FIGURE 1. Mounting hardware – Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:53Z
Check the source to verify that this is the current version before use.

REQUIREMENTS

Dimensions and configurations: See figure 1.

Hardware intermateability: See table I.

Materials and finishes: Copper alloy in accordance with ASTM B16, plated in accordance with SAE-AMS-QQ-N-290, grade G, for subpart number 2; stainless steel for subpart number 1.

Application: Each Part or Identifying Number (PIN) with subpart number 1 shall be interchangeable in MIL-DTL-55302/140 through /153. Each PIN with subpart number 2 shall be interchangeable in MIL-DTL-55302/144 through /153.

PIN example: M55302/154-1A.

A – denotes different hardware styles.

1 – denotes application in type of connector.

Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Referenced documents. In addition to MIL-DTL-55302, this document references the following:

MIL-DTL-55302/140	MIL-DTL-55302/144	MIL-DTL-55302/148	MIL-DTL-55302/153
MIL-DTL-55302/141	MIL-DTL-55302/145	MIL-DTL-55302/149	MIL-DTL-55302/155
MIL-DTL-55302/142	MIL-DTL-55302/146	MIL-DTL-55302/150	ASTM B16
MIL-DTL-55302/143	MIL-DTL-55302/147	MIL-DTL-55302/151	SAE-AMS-QQ-N-290
		MIL-DTL-55302/152	

CONCLUDING MATERIAL

Review activities:
Army – CR
Navy – EC
Air Force – 11
DLA - CC

Preparing activity:
DLA - CC

(Project 5935-4499-000)

Review activities:
Army – AR, AT, AV, CR4
Navy – AS, MC, OS, SH
Air Force – 19, 99

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at http://assist.daps.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:53Z
Check the source to verify that this is the current version before use.