MILITARY SPECIFICATION SHEET

(A) CONNECTORS, PRINTED CIRCUIT SUBASSEMBLY AND ACCESSORIES:
RECEPTACLE, SOCKET CONTACTS, 41, 66, 114 CONTACT POSITIONS:
FOR PRINTED WIRING BOARDS (.100 X .050 OFFSET GRID)

This specification is approved for use by Rome Air Development Center, Department of the Air Force, and is available for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the connectors described herein shall consist of this document and the latest issue of Specification MIL-C-55302.


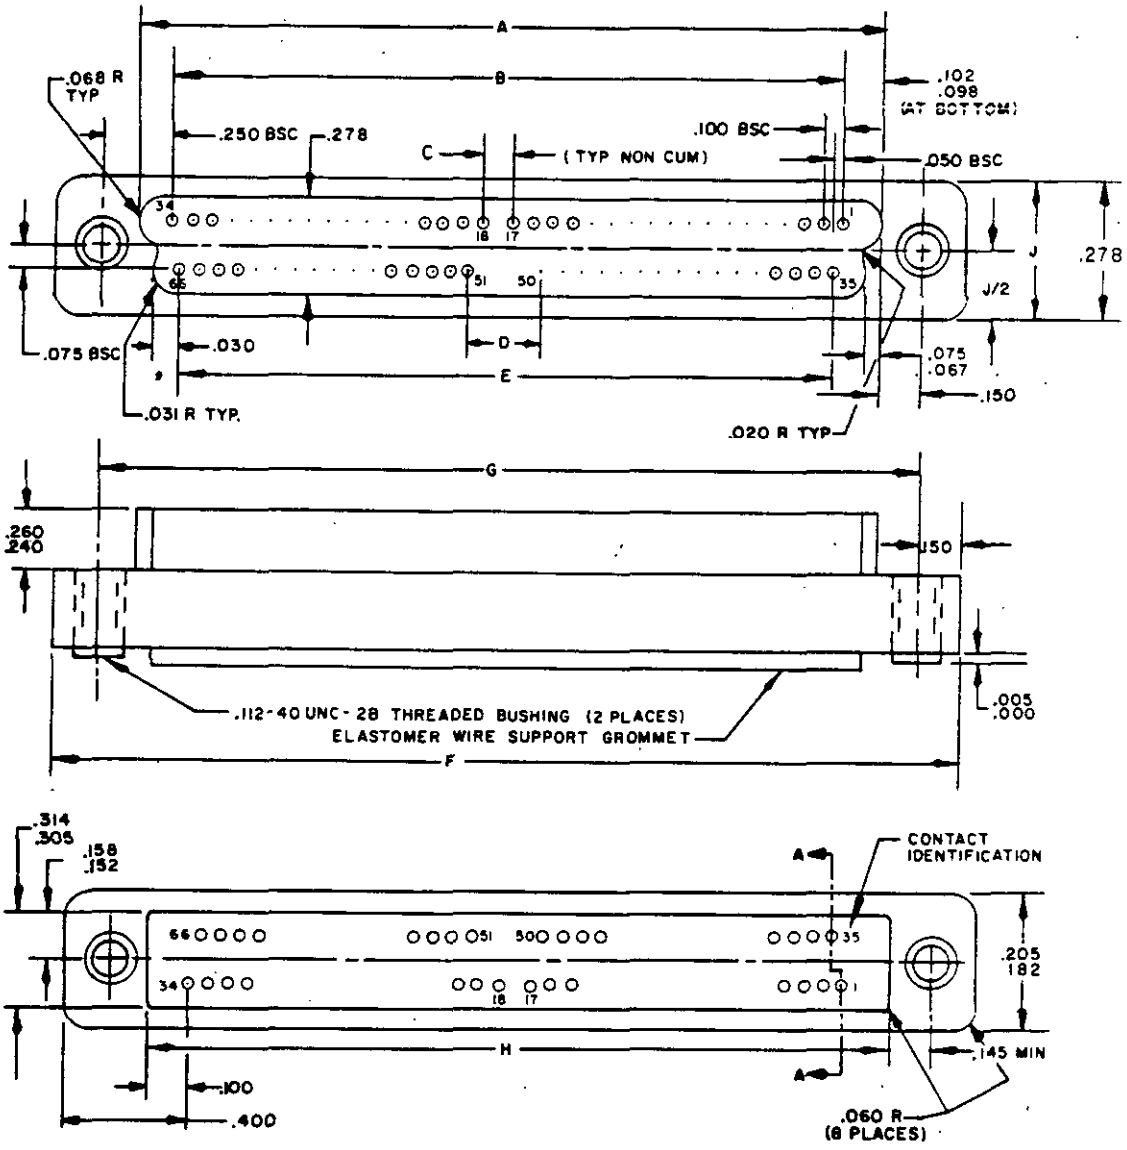


FIGURE 1. Connectors, receptacle, (.100 X .050 offset grid).

(A) denote change

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:49Z
Check the source to verify that this is the current version before use.

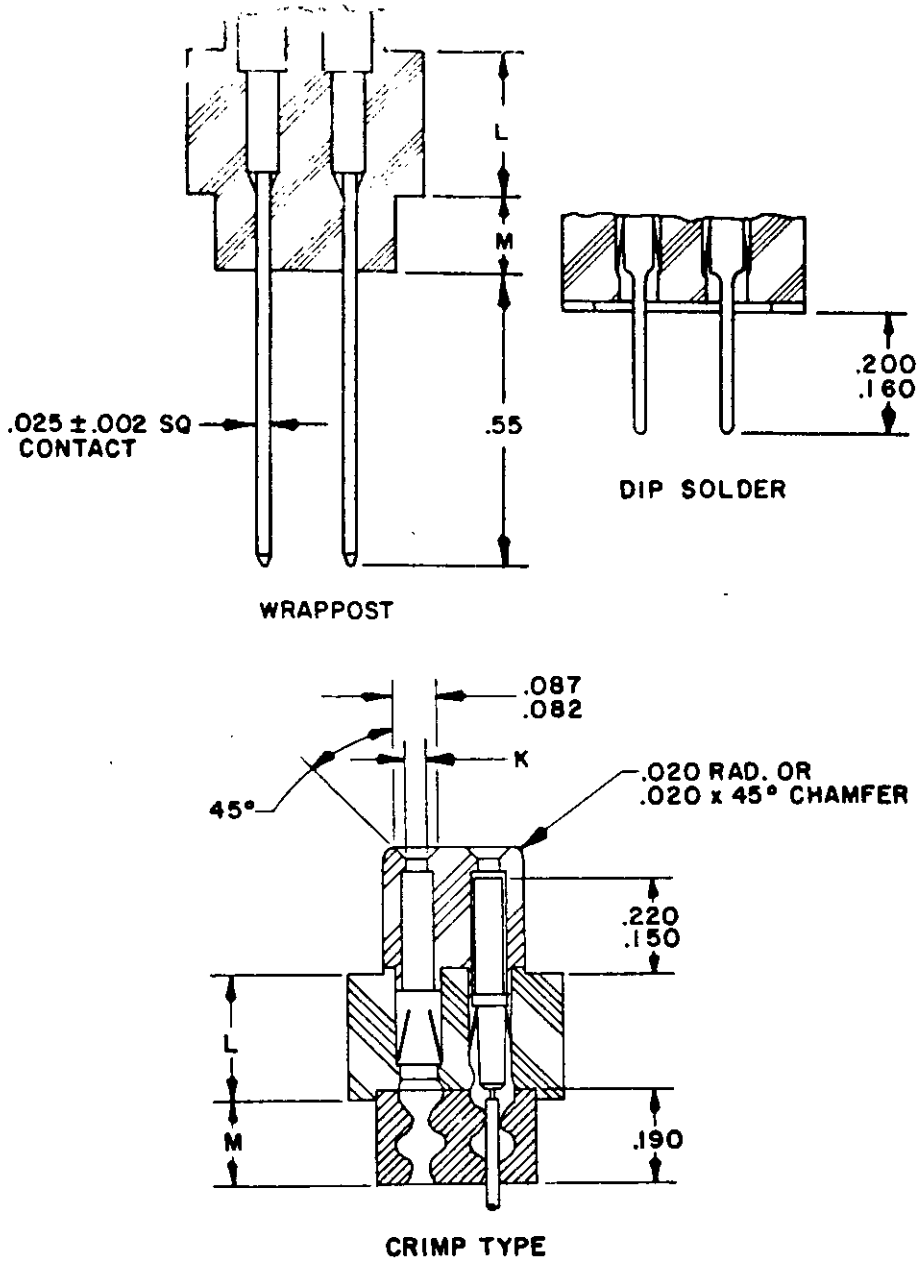

SECTION A-A

FIGURE 1. Connectors, receptacle (.100 X .050 offset grid) - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:49Z
Check the source to verify that this is the current version before use.

INCHES	MM	INCHES	MM	INCHES	MM	INCHES	MM
.005	.13	.076	1.93	.195	4.95	.52	13.21
.007	.18	.082	2.08	.200	5.08	1.900	48.26
.010	.25	.087	2.21	.205	5.21	2.000	50.80
.015	.38	.098	2.49	.210	5.33	2.200	55.88
.020	.51	.100	2.54	.211	5.36	2.500	63.50
.025	.64	.102	2.59	.240	6.10	2.80	71.12
.030	.72	.112	2.84	.250	6.35	3.400	86.36
.031	.79	.129	3.28	.260	6.60	3.500	88.90
.032	.81	.130	3.30	.278	7.06	3.700	93.98
.041	1.04	.145	3.68	.280	7.11	4.000	101.60
.042	1.07	.148	3.76	.300	7.62	4.300	109.22
.044	1.12	.150	3.81	.310	7.87	6.000	152.40
.046	1.68	.152	3.86	.314	7.98	6.200	157.48
.050	1.27	.154	3.91	.400	10.16	5.900	149.86
.060	1.52	.158	4.01	.415	10.54	6.500	165.10
.067	1.70	.160	4.06	.450	11.43	6.800	172.72
.068	1.73	.170	4.32	.500	12.70		
.074	1.88	.190	4.83				
.075	1.91						

NOTES:
1. Dimensions are in inches.
2. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
3. Unless otherwise specified, tolerance is ±.005 (.13 mm) on three place decimals, ±.02 (.51 mm) on two place decimals, and ±2° on angles.
4. These connectors mate with connectors specified in MIL-C-55302/83.
5. Unless otherwise specified contacts are shipped loose in a plastic bag.

FIGURE 1. Connectors, receptacle, (.100 X .050 offset grid) - Continued

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:49Z
Check the source to verify that this is the current version before use.

TABLE I. Dash number, contacts, and dimensions.

Dash number	Number of contacts	Type of Termination	Type of Contact M55302/84	Number of contacts supplied	Dimensions											
					A	B	C	D	E	F	G	H ±.005 -.010	J	K	L	M
-01	66	Crimp removable	01	0	3.700	3.500	.300	.400	3.400	4.300 ±.007	4.000	3.700	.415	.044	.250	.17
-02	66	Dip solder	03	0								N/A				N/A
-03	66	Solder turret	04	0								3.700				.17
-04	66	Wrappost	05	0												.129 ±.007
-05	66	Crimp removable	02	0												.17
-06	66	Crimp removable	01	66												.17
-07	66	Crimp removable	02	66												N/A
-08	66	Dip solder	03	66								N/A				.17
-09	66	Solder turret	04	66								3.700				.129 ±.007
-10	66	Wrappost	05	66								3.700				.17
-11	41	Crimp removable	01	0	2.200	2.000	N/A	N/A	1.900	2.800	2.500	2.200				.17
-12	41	Crimp removable	02	0								N/A				N/A
-13	41	Dip solder	03	0								2.200				.17
-14	41	Crimp removable	04	0								2.200				.17
-15	41	Crimp removable	01	41								2.200				.17
-16	41	Crimp removable	02	41								N/A				N/A
-17	41	Dip solder	03	41								2.200				.17
-18	41	Solder turret	04	41												
-19	114	Crimp removable	01	0	6.200	6.000	.400	.500	5.900	6.800 ± .015	6.500	6.200	.450 ±.010 -.005	.044	.280	.16
-20	114	Crimp removable	02	0								6.200				.16
-21	114	Dip solder	03	0								N/A				N/A
-22	114	Solder turret	04	0								6.200				.16
-23	114	Wrappost	06	0								6.200				.16
-24	114	Crimp removable	01	114								6.200				.16
-25	114	Crimp removable	02	114								6.200				.16
-26	114	Dip solder	03	114								N/A				N/A
-27	114	Solder turret	04	114								6.200				.16
-28	114	Wrappost	06	114								6.200				.16

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:49Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1 and table I.

(A) Material:
Insulators: In accordance with MIL-C-55302.
Contact retention clips: Beryllium copper per QQ-C-533.
Wire support: Elastomer per MIL-R-3065.
Mounting bushings: Stainless steel per QQ-S-763, series 300.

Contact identification: See figure 1 and table I.

(A) Mating and unmating: The maximum mating force shall be the average mating force measured in five engagements and shall not exceed .5 times the number of contacts in pounds.

Contact resistance: The potential drop across a mated contact at 3 amperes test current shall not exceed 25 millivolts, and after corrosion test shall not exceed 30 millivolts.

Dielectric withstanding voltage:
Sea level: 1500 Vac (rms) test.
50,000 feet altitude: 500 Vac (rms) test.

Current rating: 3.0 amperes maximum per contact. 2.25 amperes continuous per contact per connector at room ambient.

Contact: See table I.

Keying plug: M55302/85.

(A) Insertion and removal tool: M81969/10-01 and -02.

(A) Crimp tool: Hand crimp tool per M22520/1.

Part number: M55302/82-(dash number from table I).

Custodian:
Air Force - 17

Review activities:
Air Force - 11, 99, 85
DLA - ES

User activity:
Air Force - 19

Preparing activity:
Air Force - 17

Agent:
DLA - ES

(Project 5935-F094-15)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:49Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE NAVY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12503 WASHINGTON D. C.
POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE NAVY

Defense Electronics Supply Center
1507 Wilmington Pike
Dayton OH 45444

Attn: ESD

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:49Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ USER
	☐ MANUFACTURER
	☐ OTHER *(Specify)*: _____

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

(TO DETACH THIS FORM, CUT ALONG THIS LINE.)

DD FORM 82 MAR 1426

PREVIOUS EDITION IS OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:49Z
Check the source to verify that this is the current version before use.