UU-P-12C
January 18, 1974
SUPERSEDING
Int. Fed. Spec. UU-P-0012B (GSA-FSS)
November 23, 1971 and
Fed. Spec. UU-P-12A
December 22, 1959

# FEDERAL SPECIFICATION

## PAD, COLUMNAR

This specification was approved by the Commissioner, Federal Supply Service, General Services Administration, for the use of all Federal agencies.

## 1. SCOPE

1.1 Scope. This specification covers single entry columnar pads used for accounting or analysis purposes.

## 2. APPLICABLE DOCUMENTS

2.1 The following documents, of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein.

Federal Specifications.

PPP-B-566 - Boxes, Folding, Paperboard.
PPP-B-636 - Boxes, Shipping, Fiberboard.
PPP-B-676 - Boxes, Setup.

Federal Standard:

Fed. Std. No. 123 - Marking for Domestic Shipment (Civil Agencies).

(Activities outside the Federal Government may obtain copies of Federal Specifications, Standards, and Handbooks as outlined under General Information in the Index of Federal Specifications and Standards and at the prices indicated in the Index. The Index, which includes cumulative monthly supplements as issued, is for sale on a subscription basis by the Superintendent of Documents, U.S. Government Printing Office, Washington, DC 20402.

(Single copies of this specification and other Federal Specifications required by activities outside the Federal Government for bidding purposes are available without charge from Business Service Centers at the General Services Administration Regional Offices in Boston, New York, Washington, DC, Atlanta, Chicago, Kansas City, MO, Fort Worth, Denver, San Francisco, Los Angeles, and Seattle, WA.

(Federal Government activities may obtain copies of Federal Specifications, Standards, and Handbooks and the Index of Federal Specifications and Standards from established distribution points in their agencies.)

Military Standards:

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129 - Marking for Shipment and Storage.

(Copies of Military Specifications and Standards required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:19Z
Check the source to verify that this is the current version before use.

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless a specific issue is identified, the issue in effect on date of invitation for bids or request for proposal shall apply.

Technical Association of the Pulp and Paper Industry (TAPPI) Standards:

T 402 - Standard Conditioning and Testing Atmospheres for Paper, Board, Pulp Handsheets and Related Products.
T 410 - Weight per Unit Area (Basis Weight or Substance) of Paper and Paperboard.
T 411 - Thickness (Caliper) of Paper and Paperboard.
T 414 - Internal Tearing Resistance of Paper.

(Application for copies should be addressed to the Technical Association of the Pulp and Paper Industry, One Dunwoody Park, Atlanta, GA 30341.)

National Motor Freight Traffic Association, Incorporated, Agent:

National Motor Freight Classification.

(Application for copies should be addressed to the American Trucking Association, Inc., 1616 P Street N.W., Washington, DC 20036.)

Uniform Classification Committee, Agent:

Uniform Freight Classification.

(Application for copies should be addressed to the Uniform Classification Committee, Room 1106, 222 South Riverside Plaza, Chicago, IL 60606.)

(Technical society and technical association specifications and standards are generally available for reference from libraries. They are also distributed among technical groups and using Federal agencies.)

3. REQUIREMENTS

3.1 Material.

3.1.1 Cover. Covers for columnar pads shall be made from flexible paperboard of the type commercially used for this purpose.

3.1.2 Backing. The backing for columnar pads shall be made from chipboard or other suitable paperboard. Thickness average shall be not less than 0.020 inch.

3.1.3 Paper. Columnar pad paper shall be made from fibrous, cellulosic material which may include reclaimed fiber and shall conform to the requirements of this specification.

TABLE I. Physical requirements of paper

| Basis weight 17 by 22 - 500 sheets, pounds, minimum | Tear, grams, minimum | |
|---|---|---|
| | MD | CD |
| 16 | 30 | 35 |
| 20 | 35 | 40 |
| 24 | 40 | 45 |

3.2 Color.

3.2.1 Cover. The paperboard cover shall be tan, buff, or green.

3.2.2 Sheets. The sheets shall be white, green, buff, or yellow, as specified (see 6.2).

3.2.3 Rulings. The rulings shall be brown and green, red and blue, or green and red, as specified (see 6.2).

3.3 Writing quality. The sheets shall be suitably sized to accept ink without feathering or ink penetration to the opposite side, when tested as specified in 4.2.3.

Source: https://assist.dla.mil -- Downloaded: 202640-26T12:19Z
Check the source to verify that this is the current version before use.

3.4 Ruling and printing. Lines and numbers shall be produced by printing or machine ruling and shall conform generally to either Figure 1 or 2. Since these figures are representative of typical columnar pads, slight deviations will be allowed to conform to commercial practices. Lines and numbers shall show no waviness or feathering. Unless otherwise specified (see 6.2) lines and numbers shall be printed or ruled on the top side of the sheet only.

3.4.1 Columns. The number of columns shall be 3, 4, 5, 6, 7, 8, 10, 11, 12, 13, 14, 16, 18, 21, 25, 28, or 30 as specified (see 6.2). Unless otherwise specified (see 6.2), each column shall be unit ruled for 1,000,000. Unless otherwise specified (see 6.2) each pad shall have a name or description column which shall be not less than 1-1/2 inches in length.

3.4.2 Direction of columns. Columns shall run perpendicular to the binding side on pads not punched for binders. On pads punched for binders columns shall run parallel to the binding side. Columns shall run perpendicular to the binding side when the pad has perforations and is punched for filing along the horizontal dimension.

3.4.3 Numbered columns. Pads with name or description columns shall be furnished with numbered columns. Columns shall be numbered from left to right with arabic numerals. The numbers shall be consecutive and shall be centered in the columns. The numbers may be enclosed by squares, circles, or ovals, or may stand alone without adornment. When ruling and printing are specified for both sides of the sheets, the numbers shall be repeated on the reverse side in numerical order from left to right using the same numbers.

3.4.4 Numbered lines. Pads with name or description columns shall be furnished with numbered lines. Lines shall be numbered from top to bottom with consecutive arabic numerals. The numbers shall appear to the left of the name or entry space or first column, as applicable, and to the right of the last column. When ruling and printing are specified on both sides of the sheets, the numbers shall be repeated on the reverse side in numerical order using the same numbers.

3.5 Dimensions. Columnar pads shall be the following dimensions in inches, as specified (see 6.2).

8 X 10-1/2
8-1/2 X 14
10-1/2 X 14
11 X 8-1/2
14 X 8-1/2
16 X 10-1/2
17 X 11
17 X 14
25-1/2 X 14
34 X 14

The first dimension given is the binding dimension. A tolerance of ± 1/8 inch shall be allowed.

3.6 File punching. When specified, columnar pads shall be punched for filing. Holes shall be 1/4 inch in diameter, ± 1/16 inch. The holes shall be placed 3/8 inch, ± 1/16 inch, edge to center. The hole spacing given between holes shall be from center to center, ± 1/16 inch. Holes shall be evenly punched through the whole pad. The number of holes, the location, and spacing shall be as specified (see 6.2).

3.7 Perforations. When punched pads are specified (see 6.2), sheets of sixteen or more inches in the horizontal dimension shall be perforated in the upper right-hand corner to form a tear-out portion, so that when the horizontal dimension is folded, the title space can be seen. The horizontal perforations shall be perpendicular to the vertical dimension of the pads, and the vertical perforations shall be perpendicular to the horizontal dimension of the pads. Perforations shall be even and uniform to allow for easy separation. There shall be no break-throughs along the perforation lines.

3.7.1 Fold columns. When pads are perforated as described in 3.7, there shall be small unnumbered fold columns placed along the lines where the folds will occur, so that obliteration of entries will not result along these fold lines. These columns shall be not less than 1/8 inch nor more than 3/4 inch in width.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:19Z
Check the source to verify that this is the current version before use.

3.8 Assembly of pads. Not less than fifty sheets, cover, and backing shall be curely fastened together along the binding edge with a strip of cloth or paper. nesion shall be accomplished by either glue or a plastic compound. The binding all extend completely along the edge. The strip of cloth or paper binding shall erlap the cover and backing 3/8 inch ± 1/8 inch.

3.9 Workmanship. All edges to the columnar pads shall be evenly and smoothly t, and free from bent or broken corners. The sheets of pad paper shall be free om dirt, foreign matter, holes, tears, wrinkles, creases, and other imperfections ich affect appearance or impair serviceability.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or rchase order, the supplier is responsible for the performance of all inspection quirements as specified herein. Except as otherwise specified, the supplier may use s own facilities or any commercial laboratory acceptable to the Government. The vernment reserves the right to perform any of the inspections set forth in the ecification where such inspections are deemed necessary to assure that supplies and rvices conform to prescribed requirements.

4.1.1 Inspection. Sampling for examination and tests shall be performed in ordance with MIL-STD-105, except where otherwise noted. For purpose of sampling, a : shall consist of pads of one type, size, color, and options taken herein (see 6.2) omitted for inspection at one time.

4.2 Inspection of components and materials. In accordance with 4.1, the supplier responsible for insuring that components and materials were manufactured, examined, d tested in accordance with this specification or referenced subsidiary specifications d standards.

4.2.1 Component testing. Each lot of paper, cover, and back used for the fabrica-on of columnar pads shall be tested in accordance with the applicable test methods ecified hereinafter, to determine compliance with the requirements of section 3. Each spection lot shall consist of a component of a single grade manufactured by the same urce, under essentially the same conditions and used in the production of the quantity the end item submitted for inspection at one time.

4.2.2 Evidence of compliance. In lieu of using his own facilities, the ntractor may submit a report of analysis of component materials from a laboratory ceptable to the Government, whether an independent test facility or the laboratory of e raw material supplier, as evidence of compliance with the specification requirements. e report of analysis shall include, in addition to the actual data, the manufacturer's me, name and address of the testing laboratory, date of test, and quantity of material presented by the test report.

4.2.3 Testing of components. The pad paper and pad backing material shall be tested r the applicable characteristics specified in table II. Tests shall be made in ccordance with the indicated TAPPI method or as referenced in the table. The lot size all be expressed in pounds of paper or backing material, as applicable, used in the anufacture of the paper pads. The sample unit shall consist of not less than 3,000 quare inches of paper or backing material, as applicable. The sample size shall be rawn in accordance with level S-1 of MIL-STD-105. Test results shall include all alues upon which the results are based and there shall be no failures to meet the ample unit or lot average requirements. All samples shall be conditioned and tested nder uniform atmospheric conditions as specified in TAPPI method T 402.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:19Z
Check the source to verify that this is the current version before use.

TABLE II. Instructions for testing of components

| Characteristics | Specification reference Rqmt. | Test Meth. | Requirements applicable to Sample Unit | Lot Ave. | Number determinations per Sample Unit | Results reported Pass or Fail | Results reported numerically to nearest |
|---|---|---|---|---|---|---|---|
| Atmospheric Conditions | 4.3.2 | T 402 1/ | All testing except writing quality | | | | |
| Paper | | | | | | | |
| Basis weight | Table I | T 410 1/ | | X | 1 | | 0.1 pound |
| Tear resistance | Table I | T 414 1/ | | X | 5 in each direction | | 1 gram |
| Writing quality | 3.3 | 4.4.1 | X | | 1 | X | |
| Backing | | | | | | | |
| Thickness | 3.1.2 | T 411 1/ | | X | 20 | | 0.001 inch |

1/ Refers to TAPPI test method.

4.3 Inspection of the end item.

4.3.1 Examination of the end item. The end item shall be examined for the defects set forth in the applicable subparagraphs at the inspection levels and acceptable quality levels (AQL's), in 4.3.1.1. Random samples shall be drawn from each lot for examination of visual, dimensional, and preparation for delivery defects (see 4.3.1.6). The lot size shall be expressed in units of pads, for examination in 4.3.1.3, 4.3.1.4, and 4.3.1.5 and in units of shipping containers for examination in 4.3.1.6.

4.3.1.1 Inspection levels and acceptable quality levels for examination. The inspection levels for determining the sample size and AQL's, expressed as defects per hundred units, shall be as follows:

| Examination paragraph | Inspection level | AQL |
|---|---|---|
| 4.3.1.2 | S-1 | N/A |
| 4.3.1.3 | S-3 | 4.0 |
| 4.3.1.4 | S-2 | 2.5 |
| 4.3.1.5 | S-2 | 2.5 |
| 4.3.1.6 | S-2 | 2.5 |

4.3.1.2 Sheet count. An examination shall be made to determine the average number of sheets per pad. The sample unit shall be one pad. The sample size shall be accumulated by drawing an approximately equal number of pads from each of the shipping containers selected under 4.3.1.6. The lot shall be unacceptable if the average number of sheets per pad, of all sample units examined, is less than specified.

4.3.1.3 Examination of the end item for dimensional defects. The sample unit for this examination shall be one pad.

| Examine | Defect |
|---|---|
| Sheet size | Not size specified. |
| Cover and backing | Not size specified. |
| File punching (when specified) | Diameters not within specified tolerance; spacing not as specified or within tolerances; not within specified distance from the edge of pad. |
| Perforations (when specified) | Extend below the first line; not perforated enough to allow for specified folding. |
| Binding | Does not extend down cover or backing to specified depth. |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:19Z
Check the source to verify that this is the current version before use.

4.3.1.4 Examination of the end item for defects in construction and workmanship. The sample unit for this examination shall be one pad.

| Examine | Defect |
|---|---|
| Cover | Material not as specified, bent; broken corners; dirty; missing. |
| Backing | Missing; bent; broken corners; dirty. |
| Sheets | Dirt, foreign matter; holes; tears; wrinkles; creases; color not as specified. |
| Assembly | Binding not as specified, or incomplete, or missing, or improperly applied; adhesive compound missing, incomplete, or improperly applied. |
| File punching (when specified) | Missing; number of holes not as specified; not on side specified; uneven punching; holes do not go through whole pad. |
| Perforations | Missing; not parallel to horizontal and vertical dimensions, as applicable; uneven; broken through. |

4.3.1.5 Examination of the end item for defects in rulings and directions of columns. The sample unit for this examination shall be one pad.

| Examine | Defect |
|---|---|
| Color | Not as specified. |
| Lines | Wavy or feathery. |
| Columns | Not number specified; not in direction specified; not lined in accordance with general commercial practice. |
| Name or entry space | Missing when so specified (see 6.2). |
| Numbered columns | Missing. |
| Numbered lines | Missing. |

4.3.1.6 Examination of the end item for defects in preparation for delivery. An examination shall be made to determine that markings, materials, workmanship, and contents comply with the requirements of section 5 of this specification. The sample unit shall be one shipping container, fully packed. An equal number of shipping containers, fully prepared for delivery, shall be examined for closure defects.

| Examine | Defect |
|---|---|
| Markings (exterior and interior) | Incorrect; incomplete; illegible; omitted; of improper size, location, sequence or method of application. |
| Materials | Any nonconforming components; component missing, damaged or otherwise defective. |
| Workmanship | Inadequate application of components such as, incomplete closure of case liners, container flaps, loose or inadequate sealing, stapling, or strapping. |
| Contents | Bulged or distorted container. |
| | Number of packages of pads per container is more or less than required. |



Source: https://assist.dla.mil -- Downloaded: 202610-26T12:19Z
Check the source to verify that this is the current version before use.

4.4 Test method.

4.4.1 Writing quality. Write or draw several lines of words or characters on both sides of the paper using a pen with a firm medium point (Esterbrook point no. 9668 or equal) and 1 percent aqueous solution of either C.I. Acid Red 1 (Color Index Number 18050) or C.I. Acid Green 3 (Color Index Number 42085), (see 6.3). To be considered satisfactory, the lines or characters shall be clear-cut and legible without feathering or spreading.

5. PREPARATION FOR DELIVERY

5.1 For packaging purposes, columnar pads shall be classified by size in groups as follows:

Group I - Up to, but not including, 17 inches horizontal measurement.
Group II - 17 inches horizontal measurement up to, but not including, 25-1/2 inches.
Group III - 25-1/2 inches horizontal measurement and over.

5.2 Packaging. Packaging shall be level A, B, or C, as specified (see 6.2).

5.2.1 Level A. Columnar pads shall be completely wrapped in 50 pound kraft and the wrapper sealed with gummed tape or a suitable adhesive. Pads may be packaged in a folding carton or set-up box conforming to PPP-B-566 or PPP-B-676. If wrapped, a single paperboard stiffener sheet the size of the pads shall be placed either beneath or on top of the stacked pads prior to wrapping, to prevent damage to bound edges by flexing of the package. The quantity per unit package for groups I and II shall be: ten pads, bound edges faced five to each side. Group III pads shall be packaged in units of five pads.

5.2.2 Level B. Columnar pads shall be packaged as specified in 5.2.1, except that pressure sensitive tape is acceptable for sealing; paperboard stiffener is not required, and transparent plastic film not less than 0.001 inches in thickness suitable for the purpose is acceptable for wrapping. When transparent film is used for wrapping, it shall be sealed with heat, electronic or other suitable sealing systems, tape, or suitable adhesive.

5.2.3 Level C. Columnar pads shall be packaged to afford adequate protection against damage during shipment from the supply source to the first receiving activity.

5.3 Packing. Columnar pads, packaged as specified in 5.2, shall be packed level A, B, or C, as specified (see 6.2).

5.3.1 Quantity per shipping container. The quantity per shipping container shall be as follows:

Group I - Five unit packages (50 pads).
Group II - Three unit packages (30 pads).
Group III - Six unit packages (30 pads).

5.3.2 Level A. Columnar pads shall be packed in boxes conforming to PPP-B-636, grade V3c or V3s. The box shall be closed, waterproofed, and reinforced as specified in the appendix to the box specification.

5.3.3 Level B. Columnar pads shall be packed in boxes conforming to PPP-B-636, class domestic. The box shall be closed in accordance with Method II in the appendix to the box specification.

5.3.4 Level C. Columnar pads in quantities as specified (see 6.2), packaged as specified in 5.2, shall be packed in containers to assure carrier acceptance and safe arrival at destination in compliance with Uniform Freight Classification rules or National Motor Freight Classification rules, as applicable.

5.4 Marking. In addition to any special markings required in one procurement document, marking of the interior packages and exterior shipping containers shall be in accordance with Fed. Std. 123 for civil agencies or MIL-STD-129 for military agencies, as applicable (see 6.2).



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:19Z
Check the source to verify that this is the current version before use.

6. NOTES

6.1 Intended use. Columnar pads covered by this specification are for use by accountants, engineers, clerks, and statisticians. They may be used for cash books, cost data books, stock records, earning and expense records, and for other similar purposes.

6.2 Ordering data. Purchasers should select the preferred options permitted herein and include the following information in procurement documents:

(a) Title, number, and date of this specification.
(b) Basis weight of the sheets (see 3.1.3).
(c) Color of the sheets (see 3.2.2).
(d) Color of the rulings (see 3.2.3).
(e) If sheets are to be printed or ruled on both sides (see 3.4).
(f) Number of columns; when other than 1,000,000 is required; when name or description column is not required (see 3.4.1).
(g) If pads are to be file punched; location and number of holes (see 3.6).
(h) Dimensions (see 3.5).
(i) Level of packaging and packing required (see 5.2 and 5.3).
(j) Marking requirements (see 5.4).

MILITARY INTEREST:

Army - GL
Navy - SA
Air Force - 84

PREPARING ACTIVITY:

GSA - FSS

CIVIL AGENCY COORDINATING ACTIVITY:

GSA - FSS
NASA - JFK

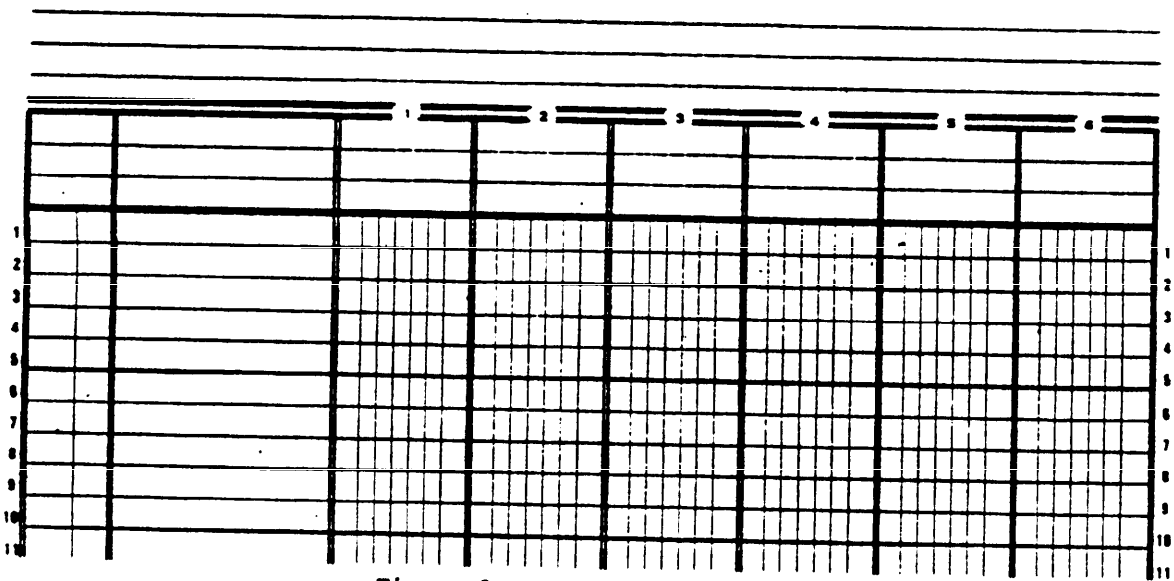



Figure 1. Example of columnar pad ruling with name space, numbered lines and numbered columns.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:19Z
Check the source to verify that this is the current version before use.

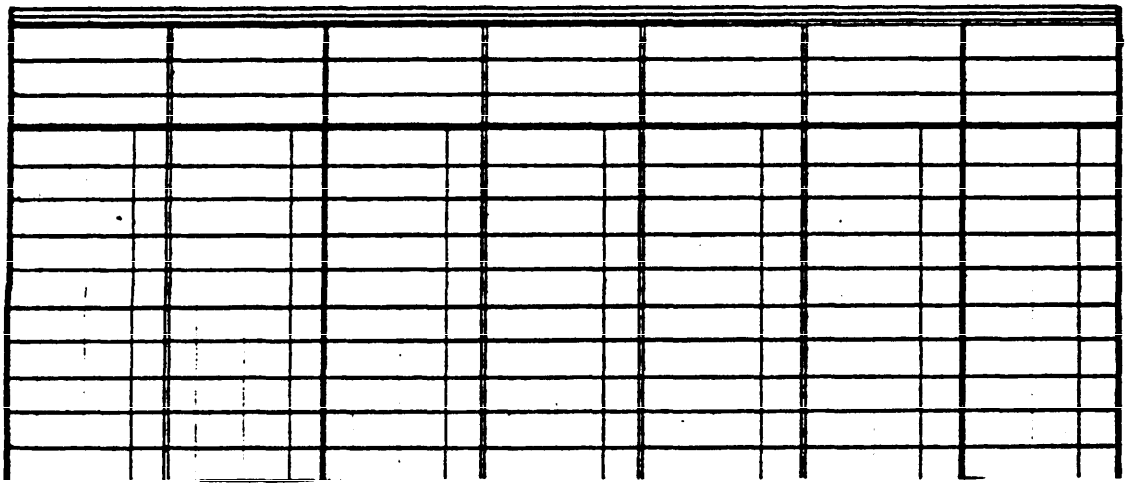


Figure 2. Example of columnar pad ruling without name space.

Orders for this publication are to be placed with General Services Administration, acting as an agent for the Superintendent of Documents. See Section 2 of this specification to obtain extra copies and other documents referenced herein. Price 15 cents each.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:19Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:19Z
Check the source to verify that this is the current version before use.