
MILITARY SPECIFICATION SHEET

CABLES, RADIO FREQUENCY, COAXIAL, SEMIRIGID, CORRUGATED OUTER CONDUCTOR, LOW LOSS FOAM DIELECTRIC, 1/2 INCH NOMINAL, 50 OHMS

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the cable described herein shall consist of this document and the latest issue of MIL-C-28830.

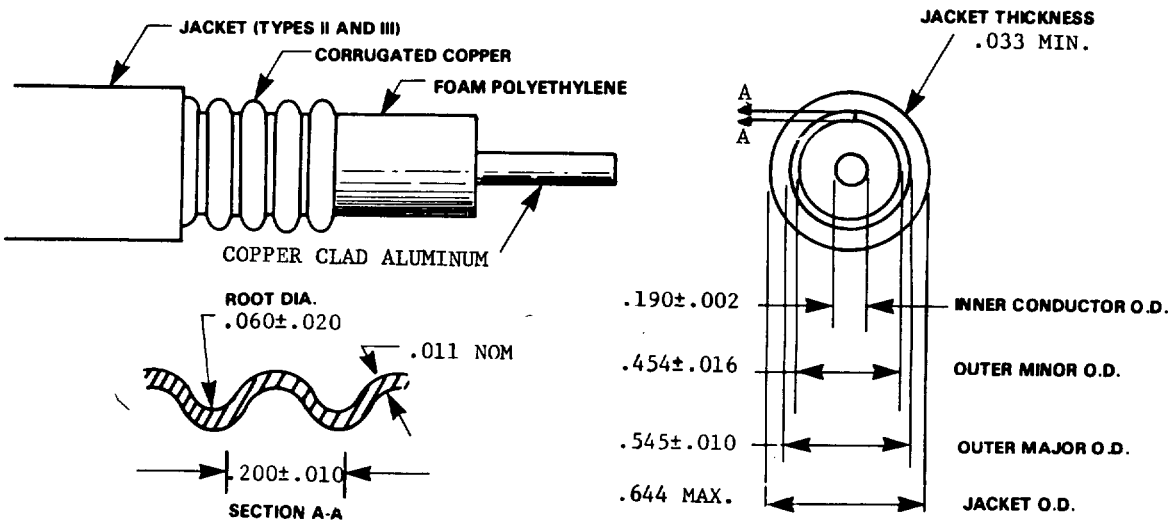

NOTES:

1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.

INCHES	MM	INCHES	MM
.002	.05	.060	1.52
.010	.25	.190	4.83
.011	.28	.200	5.08
.016	.41	.454	11.53
.020	.51	.545	13.84
.033	.84	.644	16.36

FIGURE 1. Cable configuration.

☆U.S. GOVERNMENT PRINTING OFFICE: 1982—605-034/5387

FSC 6145

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T19:20Z
Check the source to verify that this is the current version before use.

STANDARD CONDITIONS

For Attenuation
VSWR 1.0
Ambient temperature 24°C (75°F)

For Average Power
VSWR 1.0
Ambient temperature 40°C (104°F)
Inner conductor
temperature 100°C (212°F)

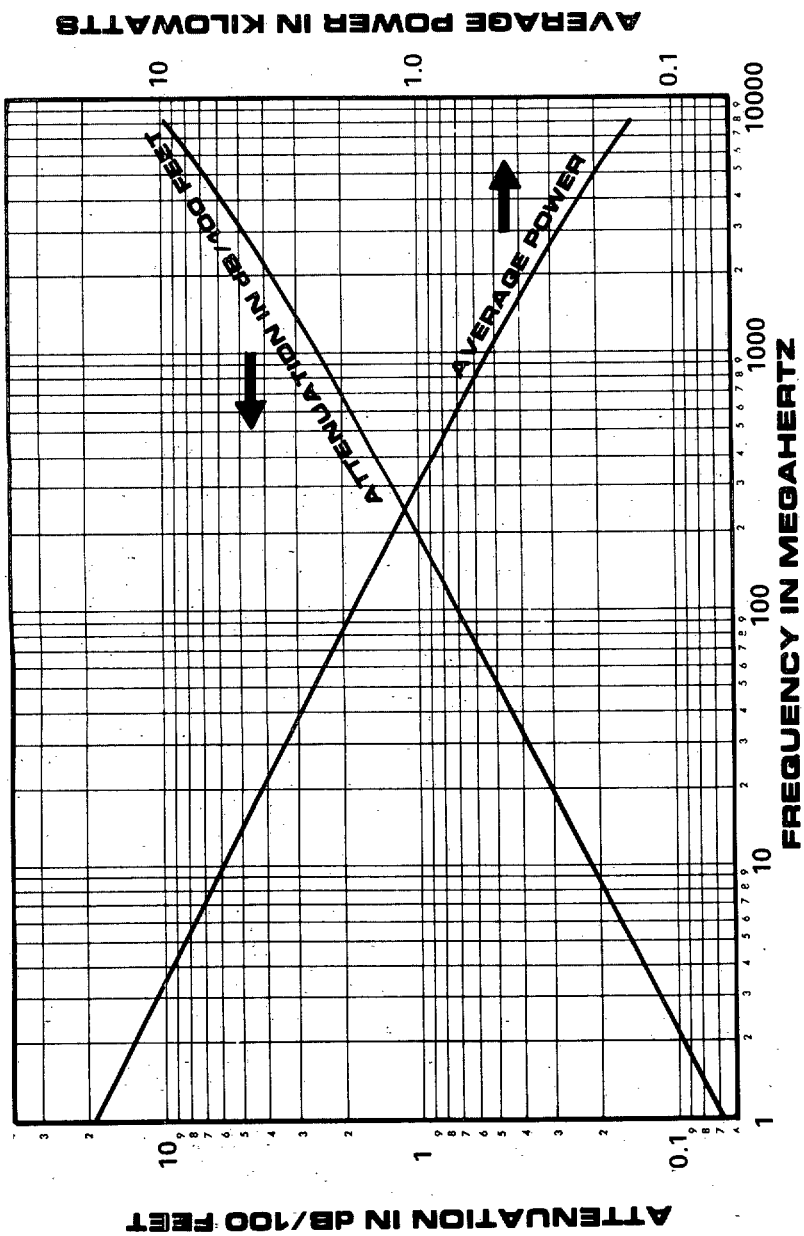


FIGURE 2. Average power rating.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T19:20Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Flexibility and cold bend mandrel diameter: 10 inches (25.4 cm) maximum.
(Test cable length: 15 feet (4.57 m).)
Impedance: 50 ±2 ohms.
Attenuation: 1.6 dB/100 ft. (30.48 m) at 400 megahertz (MHz)
5.4 dB/100 ft. (30.48 m) at 3,000 MHz
11.6 dB/100 ft. (30.48 m) at 8,000 MHz
Velocity of propagation: 88 percent nominal
Capacitance: 23.1 pF/ft. nominal
Voltage standing wave ratio (VSWR): 1.40 maximum.
VSWR frequency range: 100 MHz to 8.0 gigahertz (GHz)
Dielectric withstanding voltage: 6,000 VDC
Jacket Spark: 8,000 V RMS
Part numbers: M28830/3-II
M28830/3-III

ENGINEERING INFORMATION:

Weight: .16 lbs/ft. nominal
Minimum in-service bending diameter: 10 inches (254 mm).
Average power rating: Figure 2

Preparing activity:
NAVY-EC
Project 6145-0843-1

Custodians:
Army - CR
Navy - EC
Air Force - 85
Review activities:
Army -
Navy - AS, SH
Air Force - 17, 99
DLA - IS
User activities:
Army -
Navy - MC
Air Force - 19

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T19:20Z
Check the source to verify that this is the current version before use.