
MILITARY SPECIFICATION SHEET

MIXER STAGES, RADIO FREQUENCY, DOUBLE BALANCED, PIN PLUG-IN TERMINATION

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the mixers described herein shall consist of this specification and the latest issue of MIL-M-28837.

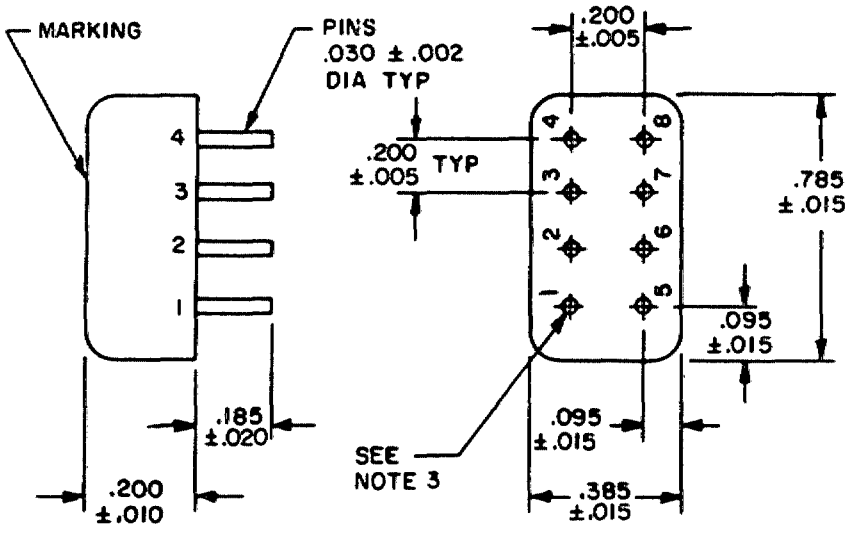

INCHES	MM
.002	0.05
.005	0.13
.010	0.25
.015	0.38
.020	0.51
.030	0.76
.095	2.41
.185	4.70
.200	5.08
.385	9.78
.785	19.94


NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Pin no. 1 shall have a contrasting color insulator, all pin numbers are to be marked on sides of case adjacent to the pins. The marking on the header is for reference only.

Termination for P/N 01 and 13
LO - Pins 1 and 5
RF - Pins 4 and 8
IF is formed by externally connecting pins 2 and 6 together and 3 and 7 together

Termination for P/N 02 and 14
LO - 1 and 5
RF - Pins 4 and 8
Pins 2, 4 and 6 are internally connected to case.
IF is formed by externally connecting pins 3 and 7 together and using the case for reference.

FIGURE 1. Outline drawing for mixers P/N M28837/1-01, -02, -13, and -14.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T19:22Z
Check the source to verify that this is the current version before use.

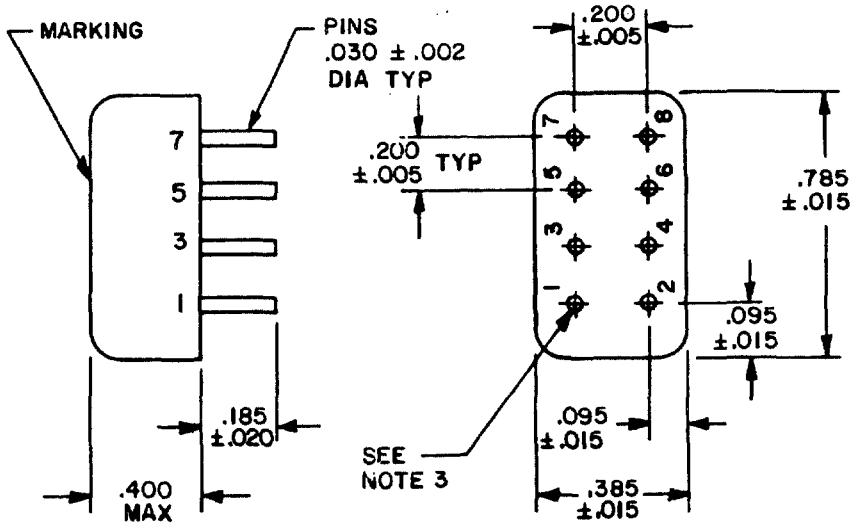


INCHES	MM
.002	0.05
.005	0.13
.010	0.25
.015	0.38
.020	0.51
.030	0.76
.095	2.41
.185	4.70
.200	5.08
.385	9.78
.400	10.16
.785	19.94

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Pin no. 1 shall have a contrasting color insulator, all pin numbers are to be marked on sides of case adjacent to the pins. The marking on the header is for reference only.

Termination for P/N 01-03, 08, and 09
LO - Pins 7 and 8
RF - Pins 1 and 2
IF is formed by externally
connecting pins 3 and 4 together
for the grounded side.

FIGURE 2. Outline drawing for mixers P/N M28837/1-03, -08, and -09.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T19:22Z
Check the source to verify that this is the current version before use.

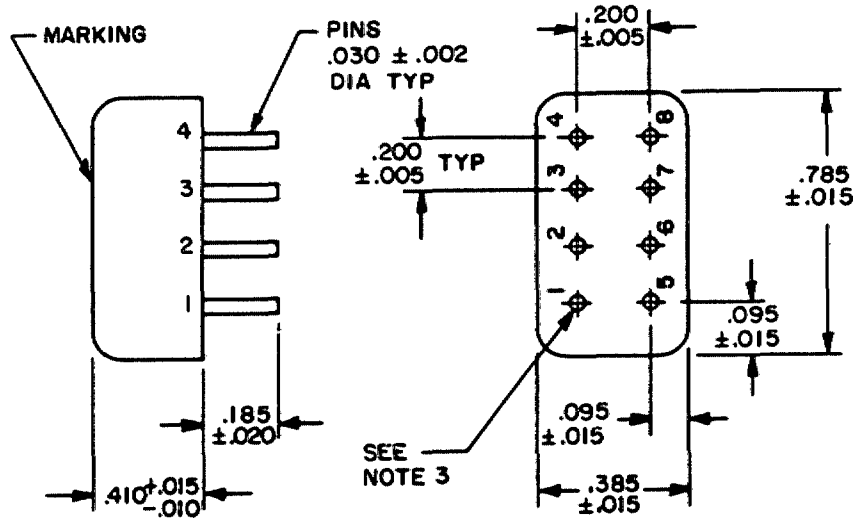


INCHES	MM
.002	0.05
.005	0.13
.010	0.25
.015	0.38
.020	0.51
.030	0.76
.095	2.41
.185	4.70
.200	5.08
.385	9.78
.410	10.41
.785	19.94

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Pin no. 1 shall have a contrasting color insulator, all pin numbers are to be marked on sides of case adjacent to the pins. The marking on the header is for reference only.

Termination for P/N 01-04, and 12
LO - Pins 1 and 5
RF - Pins 4 and 8
IF is formed by externally
connecting pins 3 and 7 together
for the grounded side and using
pins 2 and 6 for the ground side.

FIGURE 3. Outline drawing for mixers P/N M28837/1-04 and -12.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T19:22Z
Check the source to verify that this is the current version before use.

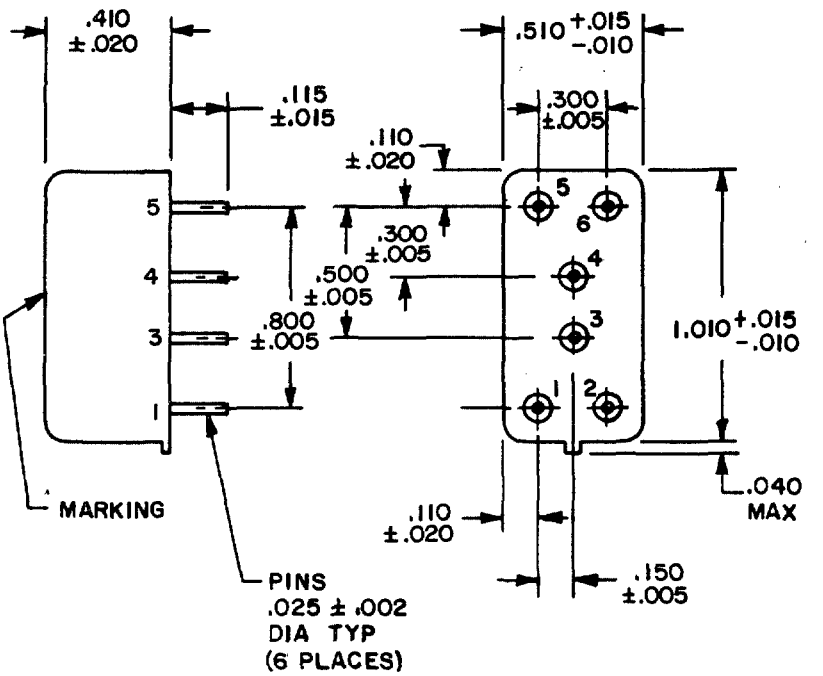


INCHES	MM
.002	0.05
.005	0.13
.010	0.25
.015	0.38
.020	0.51
.025	0.64
.040	1.02
.110	2.79
.115	2.92
.150	3.81
.300	7.62
.410	10.41
.500	12.70
.510	12.95
.800	20.32
1.010	25.65

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Pin no. 1 shall have a contrasting color insulator, all pin numbers are to be marked on sides of case adjacent to the pins. The marking on the header is for reference only.

Termination for P/N M28837/1-05, -06, -07, and -10
LO - Pins 1 and 2
RF - Pins 5 and 6
IF - Pins 3 and 4

FIGURE 4. Outline drawing for mixers P/N M28837/1-05, -06, -07, and -10.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T19:22Z
Check the source to verify that this is the current version before use.

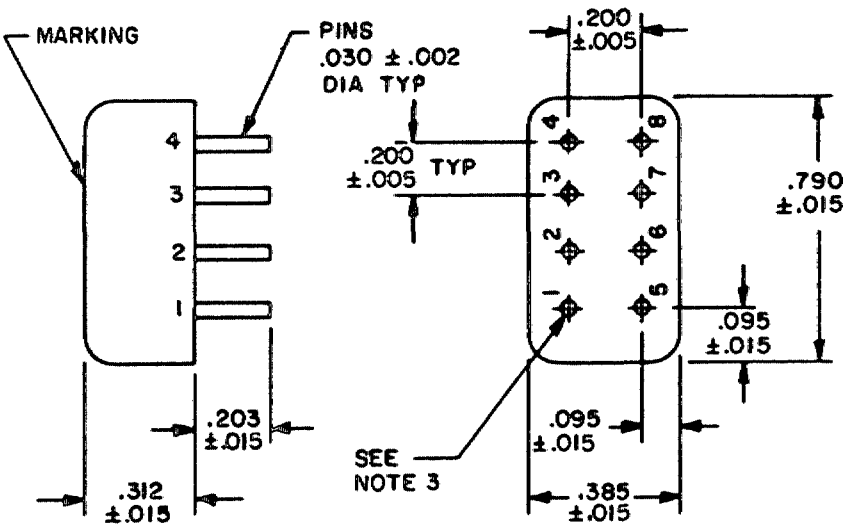

INCHES	MM
.002	0.05
.005	0.13
.015	0.38
.030	0.76
.095	2.41
.200	5.08
.203	5.16
.312	7.92
.385	9.78
.790	20.07


NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Pin no. 1 shall have a contrasting color insulator, all pin numbers are to be marked on sides of case adjacent to the pins. The marking on the header is for reference only.

Termination for P/N M28837/1-11
LO - Pins 4 and 8
RF - Pins 1 and 5
IF - Pins 3 and 7
Pins 2, 4, and 6 are grounded.

Termination for P/N M28837/1-15 and -16
LO - Pin 5
RF - Pin 8
IF - Pins 3 and 7
All other pins are ground.

FIGURE 5. Outline drawing for mixers P/N M28837/1-11, -15, and -16.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T19:22Z
Check the source to verify that this is the current version before use.

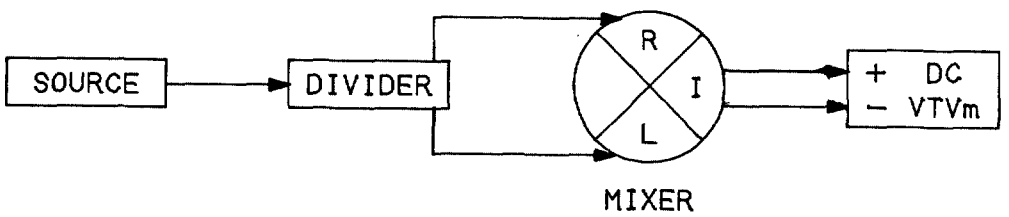

NOTE: The phase balance test shall be performed in accordance with figure 6. When any difference from the mean reading (approximately -0.35 volts) on the VTVM is greater than 0.05 volts, the mixer fails this test.

FIGURE 6. Phase balance test setup for P/N M28837/1-01 and -02.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T19:22Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Design and construction:

Dimensions and configuration: See figures 1 through 6.

Electrical characteristics:

Operating frequency range: See table I.

LO drive power: See table I.

Conversion loss (max): See table I.

Noise figure (SSB): See table I.

Isolation (minimum): See table I.

Maximum input power (rms): See table I.

Conversion compression (max): See table I.

Desensitization (max): See table I.

DC relative polarity: See table I.

VSWR: See table I.

Third order two-tone intermodulation: See table I.

Impedance: 50 ohms.

Physical and environmental characteristics:

Weight: See table II.

Temperature range: See table II.

Mechanical shock: See table II.

Hermetic seal: See table II.

Terminal strength: See table II.

Life: See table II.

Part number: M28837/1- (dash number from table I or II)

Substitutability data: See table III.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T19:22Z
Check the source to verify that this is the current version before use.

TABLE I. Electrical characteristics. 1/

Dash no.	Operating frequency range (MHz)	LO input drive power in dBm 2/	Maximum conversion loss (SSB) dB	Maximum conversion loss (SSB) MHz	Noise figure (SSB) dB	Noise figure (SSB) MHz	Isolation Minimum LO-RF dB	Isolation Minimum LO-IF dB	Isolation Minimum RF-IF dB	Frequency MHz
01N	LO .05-200	minimum +4 TV +7 maximum +13	6.5 at f_L and f_R	0.2-50 f_I DC-50	6.5 at f_L and f_R	1-50 f_I 0.4-50	45	40	N/A	.05-30
01S	RF .05-200		8.0 at f_L and f_R	50-200 f_I DC-200	8.0 at f_L and f_R	50-200 f_I 0.4-200	35	30	N/A	30-200
	IF DC-200		8.5 at f_L and f_R	0.05-0.2 f_I DC-0.4						
02N 02S	LO 5-500 RF 5-500 IF DC-500	minimum +4 TV +7 maximum +13	7.0 at f_L and f_R	5-150 f_I 0.4-150	7.0 at f_L and f_R	10-100 f_I 0.4-100	45	40	N/A	5-50
			9.0 at f_L and f_R	150-500 f_I 0.4-500	9.0 at f_L and f_R	100-500 f_I 0.4-500	30	25	N/A	50-500
03N 03S	LO .5-500 RF .5-500 IF DC-500	TV +7	7.5 at f_L and f_R	1-250 f_I DC-250	N/A		35	30	N/A	0.5-1
			8.5 at f_L and f_R	0.5-500 f_I DC-500			30 25	25 20	N/A N/A	1-250 250-500
	LO 2-500	minimum +10	6.5 at 7.0 at	f_L 5-200 f_R 20-80 f_I 5-80 f_I .4-120	3/ 6.5 at 7.0 at	f_L 5-200 f_R 20-80 f_I 5-80 f_I DC-120	40	40	N/A	2-32
04N	RF 2-400	TV +20	7.0 at 8.0 at	f_L 5-300 f_R 5-300 f_I 5-80 f_I DC-300	3/ 7.0 at 8.0 at	f_L 5-300 f_R 5-300 f_I 5-80 f_I 2-120	35	35	N/A	32-100
04S	IF DC-800	maximum +23	7.5 at	f_L 5-470 f_R 5-400 f_I 5-80	3/ 8.0 at	f_L 5-470 f_R 5-400 f_I 5-80	25	25	N/A	100-500
			9.0 at	f_L 2-500 f_R 2-400 f_I DC-800	3/ 9.5 at	f_L 2-500 f_R 2-400 f_I 2-800	N/A	N/A	17	2-400
05N	LO .05-200	minimum +7	7.5 at f_L and f_R	0.2-50 f_I DC-50	7.5 at f_L and f_R	1-50 f_I 0.4-50	45 30	40 25	N/A N/A	.05-30 30-200
05S	RF .05-200 IF DC-200	TV +13 maximum +17	9.0 at f_L and f_R	.05-200 f_I DC-200	9.0 at f_L and f_R	50-200 f_I 0.4-200	N/A	N/A	24	.05-3

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T19:22Z
Check the source to verify that this is the current version before use.

TABLE I. Electrical characteristics - Continued. 1/

Dash no.	RF & LO 4/ maximum power input (rms)	Conversion compression (maximum)	Desensitization (maximum)	Relative dc polarity 5/	VSWR (maximum)			Third order, two tone intermodulation	
					LO	IF	RF	dBm	Frequencies
01N 01S	50 mW	N/A	N/A	Negative					
02N 02S	400 mW	N/A	N/A	Negative					
03N 03S	350 mW	1.0 dB at P_R level of 0 dBm	1.0 dB at P_{R2} level of -2 dBm	Negative					
04N 04S	200 mW	1.0 dB at P_R +15 dBm P_L +23 dBm	1.0 dB at P_{R2} +13 dBm P_L +23 dBm	Positive					
05N 05S	70 mW	1.0 dB at P_R +10 dBm P_L +17 dBm	1.0 dB at P_{R2} +7 dBm P_L +17 dBm	Negative					

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T19:22Z
Check the source to verify that this is the current version before use.

TABLE I. Electrical characteristics - Continued. 1/

Dash no.	Operating frequency range (MHz)	LO input drive power in dBm 2/	Maximum conversion loss (SSB) dB / MHz	Noise figure (SSB) dB / MHz	Isolation Minimum LO-RF dB	Isolation Minimum LO-IF dB	Isolation Minimum RF-IF dB	Isolation Frequency MHz
	LO .5-500	minimum +7	7.0 at f_L and f_R 0.5-30 f_I DC-30	7.0 at f_L and f_R 1-30 f_I 0.4-30	55	45	N/A	0.5-30
06N	RF .5-500	TV +17	7.5 at f_L and f_R 30-100 f_I DC-100	7.5 at f_L and f_R 30-100 f_I 0.4-100	45	35	N/A	30-100
06S	IF DC-500	maximum +20	9.0 at f_L and f_R 100-500 f_I DC-500	9.0 at f_L and f_R 100-500 f_I 0.4-500	35 N/A	25 N/A	N/A 20	100-500 0.5-500
07N	LO 5-400 RF 5-400	TV +17	7.5 at f_L and f_R 5-200 f_I DC-200	N/A	35	30	N/A	5-100
07S	IF DC-400		9.0 at f_L and f_R 200-400 f_I DC-400		25	20	N/A	100-400
08N 08S	LO 0.5-500 RF 0.5-500 IF DC-500	TV +17	7.5 at f_L and f_R 0.5-5	N/A	45 30	35 30	N/A N/A	0.5-5 5-250
			8.5 at f_L and f_R 5-500 f_I DC-500		25	20	N/A	250-500
09N 09S	LO 1-750 RF 1-750 IF DC-750	TV +7	7.5 at f_L and f_R 2-375 f_I DC-375	N/A	45 30	30 25	N/A N/A	1-2 2-375
			8.5 at f_L and f_R 1-750 f_I DC-750		25	20	N/A	375-750
10N 10S	LO .4-500 RF .4-500 IF DC-500	minimum +7 TV +13 maximum +17	7.5 at f_L and f_R 1-50 f_I 0.4-50	7.5 at f_L and f_R 1-50 f_I 0.4-50	45 25	40 25	N/A N/A	0.4-50 50-500
			9.0 at f_L and f_R 0.4-500 f_I 0.4-500	9.0 at f_L and f_R 50-500 f_I 0.4-500				
11N 11S	LO 1-500 RF 1-500 IF DC-500	TV +23	8.5 at f_L and f_R 2-400 f_I DC-400	Within 1 dB of conversion loss	50 40 30 20	40 30 20 20	25 20 20 20	1-100 100-200 200-300 300-500
			9.5 at f_L and f_R 1-500 f_I DC-500					
12N 12S	LO .002-12 RF .002-12 IF DC-12	minimum +4 TV +7 maximum +13	6.0 at f_L and f_R .01-5 f_I 0.4-5	6.0 at f_L and f_R .01-5 f_I 0.4-5	45	40	N/A	.002-5
			8.0 at f_L and f_R .002-12 f_I 0.4-12	8.0 at f_L and f_R 5-12 f_I 0.4-12	40	30	N/A	5-12

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T19:22Z
Check the source to verify that this is the current version before use.

TABLE I. Electrical characteristics - Continued. 1/

Dash no.	RF & LO 4/ maximum power input (rms)	Conversion compression (maximum)	Desensitization (maximum)	Relative dc polarity 5/	VSWR (maximum)			Third order, two tone intermodulation	
					LO	IF	RF	dBm	Frequencies
06N 06S	140 mW	1.0 dB at P_R +8 dBm P_L +17 dBm	1.0 dB at P_{R2} +7 dBm P_L +17 dBm	Negative					
07N 07S	35 mW	N/A	N/A	Negative					
08N 08S	350 mW	1.0 dB at P_R +10 dBm	N/A	Negative					
09N 09S	350 mW	1.0 dB at P_R +0 dBm	1.0 dB at P_{R2}-2 dBm	Negative					
10N 10S	70 mW	1.0 dB at P_R +10 dBm P_L +17 dBm	1.0 dB at P_{R2} +7 dBm P_L +17 dBm	Negative					
11N 11S	425 mW	1.0 dB at P_R +14 dBm P_L +23 dBm	1.0 dB at P_{R2} +12 dBm P_L +23 dBm	Negative					
12N 12S	35 mW	N/A	N/A	Negative					

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T19:22Z
Check the source to verify that this is the current version before use.

TABLE I. Electrical characteristics - Continued. 1/

Dash no.	Operating frequency range (MHz)	LO input drive power in dBm 2/	Maximum conversion loss (SSB) dB / MHz	Noise figure (SSB) dB / MHz	Isolation Minimum LO-RF dB	LO-IF dB	RF-IF dB	Frequency MHz
13N 13S	LO .05-200 RF .05-200 IF DC-200	minimum -2 TV 0.0 maximum +13	6.5 at f_L and f_R 0.2-50 f_I DC-50	6.5 at f_L and f_R 0.2-50 f_I 0.4-50	45	40	N/A	.05-30
			8.0 at f_L and f_R 50-200 f_I DC-200	8.0 at f_L and f_R 50-200 f_I 0.4-200	35	30	N/A	30-200
			8.5 at f_L and f_R 0.05-0.2 f_I DC-0.2					
14N 14S	LO 5-500 RF 5-500 IF DC-500	minimum -2 TV 0.0 maximum +13	7.0 at f_L and f_R 10-100 f_I 10-100	7.0 at f_L and f_R 10-100 f_I 10-100	45	40	N/A	5-50
			8.0 at f_L and f_R 100-200 f_I 10-200	8.0 at f_L and f_R 100-200 f_I 10-200	30	25	N/A	50-500
			9.5 at f_L and f_R 5-500 f_I .5-500	9.5 at f_L and f_R 5-500 f_I .5-500				
15N 15S	LO 1-500 RF 1-500 IF DC-500	minimum +3 TV +7 maximum +10	7.0 at f_L and f_R 1-400 f_I DC-400	Within 1 dB of conversion loss	40	35	N/A	1-100
			8.0 at f_L and f_R 1-500 f_I DC-500		30	25	N/A	100-500
16N 16S	LO 1-500 RF 1-500 IF DC-500	minimum +13 TV +15 maximum +20	7.0 at f_L and f_R 1-400 f_I DC-400	Within 1 dB of conversion loss	40	40	N/A	1-100
			8.0 at f_L and f_R 400-500 f_I DC-500		30	25	N/A	100-500

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T19:22Z
Check the source to verify that this is the current version before use.

TABLE I. Electrical characteristics - Continued. 1/

Dash no.	RF & LO 4/ maximum power input (rms)	Conversion compression (maximum)	Desensitization (maximum)	Relative dc polarity 5/	VSWR (maximum)			Third order, two tone intermodulation	
					LO	IF	RF	dBm	Frequencies
13N 13S	50 mW	N/A	N/A	Negative	2.5:1	2.0:1	2.5:1	6/ +5 +3	f_{LO}: 200 MHz f_{R1}: 150 MHz f_{R2}: 155 MHz at -10 dBm -15 dBm
14N 14S	400 mW	N/A	N/A	Negative	2.5:1	2.0:1	2.5:1	6/ +4 +2	f_{LO}: 500 MHz f_{R1}: 400 MHz f_{R2}: 405 MHz at -10 dBm -15 dBm
15N 15S	300 mW	1.0 dB at P_R +3 dBm	1.0 dB at P_R +1 dBm	Positive	2.0:1	1.5:1	1.5:1	+12 7/	f_{LO}: 500 MHz f_{R1}: 400 MHz @ -10 dBm f_{R2}: 401 MHz @ -10 dBm
16N 16S	300 mW	1.0 dB at P_R +8 dBm	1.0 dB at P_R +1 dBm	Positive	2.0:1	2.0:1	2.0:1	+18 7/	f_{LO} = 500 MHz f_{R1} = 400 MHz @ -10 dBm f_{R2} = 401 MHz @ -10 dBm

1/ Where data does not appear in the table, the requirement does not apply.

2/ Unless otherwise specified, TV is the test value of the LO power for the electrical characteristics.

3/ Noise figure values apply over a temperature range of -54°C to 85°C. For a temperature range of 85°C to 100°C, the noise figure over the specified frequency band will be allowed an additional 0.5 dB tolerance.

4/ These values are for +25°C and are derated linearly to +125°C.

5/ With two-in phase signals applied to the LO and RF ports and unused pins grounded.

6/ Input intercept point.

7/ Output intercept point.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T19:22Z
Check the source to verify that this is the current version before use.

TABLE II. Physical and environmental characteristics. 1/

Dash no.	Weight	Temperature range in celsius (operating on top nonoperating on bottom)	Mechanical shock (method 213) 2/	Hermetic seal (method 112) 2/	Terminal strength (method 211) 2/	Life
01N 01S	0.18 oz. (5.0 g)	-54° to +100° -65° to +100°	---	Yes	---	---
02N 02S	0.18 oz. (5.0 g)	-54° to +100° -65° to +100°	---	Yes	---	---
03N 03S	0.18 oz. (5.0 g)	-55° to +100° -55° to +100°	---	Yes	---	---
04N 04S	0.21 oz. (6.0 g)	-54° to +100° -65° to +100°	C	Yes	---	---
05N 05S	0.24 oz. (6.7 g)	-54° to +100° -65° to +100°	---	Yes	---	Storage 2 years minimum
06N 06S	0.25 oz. (7.2 g)	-54° to +100° -65° to +100°	C	Yes	---	100,000 hours
07N 07S	0.23 oz. (6.5 g)	-54° to +100° -65° to +100°	C	Yes	C	---
08N 08S	0.18 oz. (5.0 g)	-55° to +100° -55° to +100°	---	Yes	C	10 years with 300,000 hours continuous
09N 09S	0.18 oz. (5.0 g)	-55° to +100° -55° to +100°	---	Yes	---	---
10N 10S	0.24 oz. (6.7 g)	-54° to +100° -65° to +100°	C	Yes	C	50,000 hours
11N 11S	0.25 oz. (7.0 g)	-55° to +85° -55° to +85°	---	No	---	---
12N 12S	0.18 oz. (5.0 g)	-54° to +100° -65° to +100°	---	Yes	C	50,000 hours
13N 13S	0.18 oz. (5.0 g)	-54° to +100° -65° to +100°	C	Yes	C	---
14N 14S	0.18 oz. (5.0 g)	-54° to +100° -65° to +100°	C	Yes	C	---

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T19:22Z
Check the source to verify that this is the current version before use.

TABLE II. Physical and environmental characteristics - Continued. 1/

Dash no.	Weight	Temperature range in celsius (operating on top nonoperating on bottom)	Mechanical shock (method 213) 2/	Hermetic seal (method 112) 2/	Terminal strength (method 211) 2/	Life
15N 15S	0.25 oz. (7.0 g)	-54° to +100° -65° to +100°	C	Yes	---	50,000 hours
16N 16S	0.25 oz. (7.0 g)	-54° to +100° -65° to +100°	C	Yes	---	50,000 hours

1/ Where --- is indicated, reference requirements as set forth in MIL-M-28837.

2/ Reference MIL-STD-202.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T19:22Z
Check the source to verify that this is the current version before use.

Substitutability data: The mixers covered by this specification sheet are substitutable for the user's or manufacturer's part numbers specified in table III. This information in no way implies that the manufacturer's part number or NSN is suitable as a substitute for the military part number.

TABLE III. Substitutability data.

Dash number	Manufacturer's code	Commercial type	NSN
01	14482	M6D	5962-00-111-7924
01	19200	11729068	5962-00-111-7924
01	17773	11253350	5962-00-111-7924
01	14482	M6D	5962-00-412-0979
01	56289	118P10592S4	5962-00-412-0979
01	96214	534768-1	5962-00-412-0979
01	14482	M6D	5820-01-015-8590
01	13499	277-0362-010	---
01	05869	723112-8	---
01	99971	7531415P1	---
01	13499	277-0362-011	---
02	21912	MD108	4920-01-012-5707
02	37695	625390-1	6625-00-408-9098
02	32252	R-CDB-156-1	6625-00-408-9098
02	14482	M6E	---
02	27956	M6E	5826-00-114-4123
02	27956	M6E	5985-00-459-5586
02	14482	643352-002	5985-00-459-5586
02	05375	SM77	5985-00-459-5586
02	29971	FC200R	5985-00-459-5586
02	30890	40-001006-01	5985-00-459-5586
02	15542	SRA-1MG	---
02	31550	50835H1	5985-00-459-5586
02	13499	277-0332-010	---
02	13499	277-0322-011	5831-00-524-2295
02	99971	7531415P2	---
02	21912	MD-108	4920-01-012-5707
03	05869	723130-1	---
03	49956	SPA-F-30333	---
03	05375	CM-1	---
03	15542	SRA-1	6625-00-008-8272
03	00752	403954-1	6625-00-008-8272
03	65597	044476-0001	6625-00-008-8272
03	12436	6010191-002	---
04	14482	M9D	---
04	80063	SM-C-801125-1	---
04	05869	723112-6	---
05	---	---	---
05	14482	M9AC	5825-01-027-3774
06	05869	723105-2	---
06	05375	SM258	---
06	14482	M9BC-8	---
06	27956	M9BC-4	---
06	05869	723105-1	---
06	14482	M9BC	5895-00-007-9045
07	05869	723112-7	
07	14482	M6KC	5962-00-321--7992
08	49956	951484-1	---
08	15542	SRA-1H	6625-00-594-0223
08	13499	277-0424-010	---
09	05869	723112-9	---
09	15542	SRA-1W	---
09	15542	SRA-1W	---

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T19:22Z
Check the source to verify that this is the current version before use.

TABLE III. Substitutability data - Continued.

Dash number	Manufacturer's code	Commercial type	NSN
10	49956	482380-1	5895-00-005-5858
10	27956	M9C	5895-00-005-5858
10	14482	M9CA	---
10	97942	5818901H01	---
11	21912	MD138	---
11	21912	MD-138	---
12	14482	M6H	---
13	14482	M6D-50	---
14	14482	M6E-50	---
15	19001	2938625	---
15	12457	DMS-2-250/14134	---
15	49956	979124-1	---
15	12457	DMS-2-250/22979	---
16	49956	G226156-1	---
16	12457	DMS-4-250/52060	---

Revision letters are not used to denote changes due to the extensiveness of the changes.

Custodians:
Army - ER
Navy - EC
Air Force - 85

Review activities:
Army - MI
Navy - EC, OS
Air Force - 11, 17, 99
DLA - ES

User activities:
Army - AR
Navy - AS, CG, MC
Air Force - 14, 19

Agent:
DLA - ES

Preparing activity:
Navy - EC

(Project 5985-0987-1)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T19:22Z
Check the source to verify that this is the current version before use.