NOT MEASUREMENT SENSITIVE


MIL-DTL-3943/339B(IH)
21 December 2023
SUPERSEDING
MIL-DTL-3943/339A(IH)
19 February 2019

DETAIL SPECIFICATION SHEET


DECORATION, RICHARD C. HOLBROOKE AWARD FOR DIPLOMACY,
U.S. DEPARTMENT OF STATE

This specification is approved for use by all
Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the latest issue of MIL-DTL-3943, and a request from the U.S. Department of State.

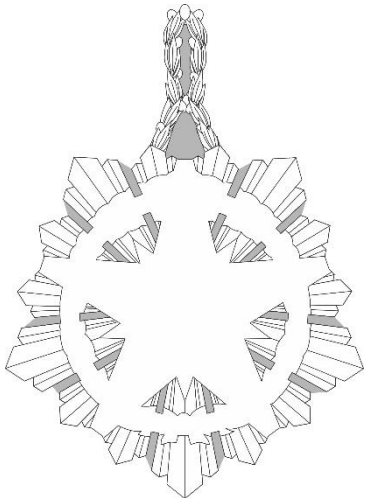

Base Obverse

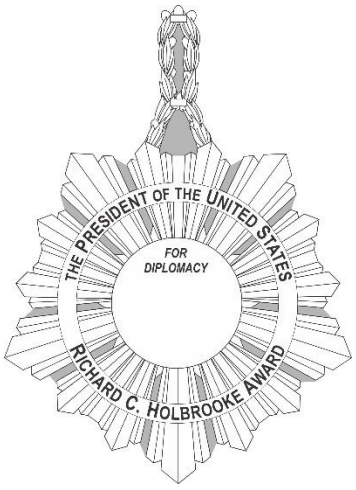

Base Reverse




Device

NOTE: All shaded areas to be pierced

Red #1 **Blue #20**

AMSC N/A FSC 8455

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T02:09Z
Check the source to verify that this is the current version before use.

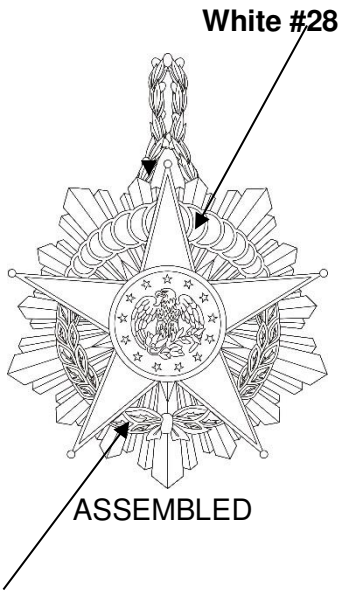

DASH NO.
-1: Regular Size
-2: Miniature Size

MATERIAL (-1 and -2): Gilding Metal 95/5 (UNS Alloy No. C210) or Red Brass 85/15 (UNS Alloy No.C-230)

FINISH (-1 and -2):
BASE:
OBVERSE: 24K Gold Plated, Matte Finish and shall match The Institute of Heraldry (TIOH) Metal Finish Chip Number 7.
REVERSE: 24K Gold Plated, Matte Finish and shall match TIOH Metal Finish Chip Number 7, On the Wording “The PRESIDENT of the UNITED STATES RICHARD C. HOLBROOKE AWARD” to be 24K Gold Plated, Matte Finish, Polished Highlights and shall match TIOH Metal Finish Chip Number 8.
DEVICE:
THE OUTLINES OF THE CENTER DISC, CLOUDS, WREATH AND STAR: Nickel Plated Matte finish and shall match TIOH Metal Finish Chip number 17.
THE EAGLE AND THE STAR IN CENTER DISC: Epoxy resin, 24K Gold Plated Matte Finish and shall match TIOH Metal Finish Chip number 7.

DIMENSIONS:
HEIGHT (Including integral suspension):
-1: 2-3/4 inches (REF)
-2: 1-11/64 inch (REF)
ASSEMBLED:
-1: 2-3/4 inches (REF)
-2: 1-11/16 inches (REF)
WIDTH:
-1: 2 inches (REF)
-2: 1 inch (REF)


THICKNESS:
-1: 0.149 ± 0.010 inch

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T02:09Z
Check the source to verify that this is the current version before use.

-2: 0.100 ± 0.010 inch
ASSEMBLED:
-1: 0.280 ± 0.010 inch
-2: 0.186 ± 0.010 inch

DECORATION SET: The decoration set shall consist of a regular size pendant with neckband, a miniature size pendant with pendant drape, a lapel button, and a service ribbon with ribbon attachment device all packaged in a presentation case conforming to MIL-DTL-14633, Type II, Style 3, with a Type I Class I pad. The following text shall be inscribed on the top of the presentation case using four lines: (Line 1) THE RICHARD C. (Line 2) HOLBROOKE (Line 3) AWARD FOR (Line 4) DIPLOMACY.

SUSPENSION RING: The suspension ring through which the neckband passes shall be made of either Gilding Metal 95/5 (UNS Alloy No. C-210) or Red Brass (UNS Alloy C-230) and shall be 24K Gold Plated, Matte Finish and shall match TIOH Metal Finish Chip Number 7. The suspension ring shall conform to the dimensions specified below, and be hard soldered to the pendant's reverse so the solder-points are flush and clean so they do not to cause abrasions or obstructions to the neckband when it is inserted,

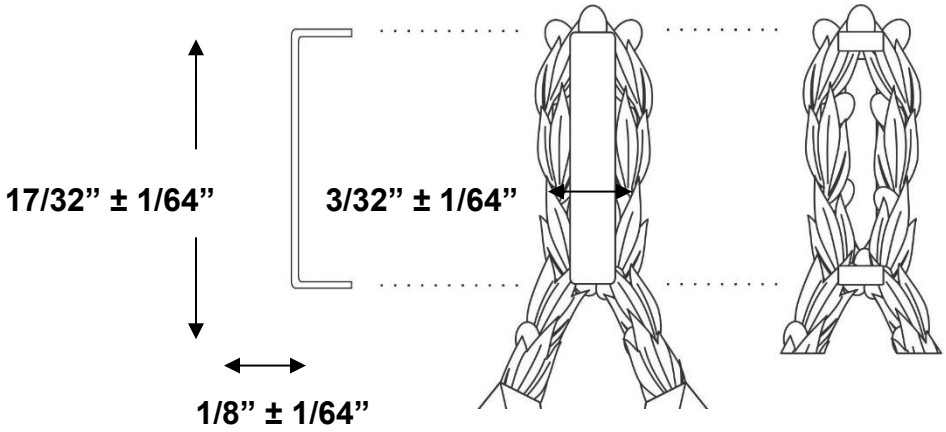

NOTES:

1. The term (REF) refers to the measurements taken from the Government furnished hub or die.

2. The ribbon ring for the miniature size medal must have two rings one connected to the lug and the other is connected to the ribbon drape. The first ring connected to the lug shall be fabricated from 0.036 inch ± 0.002 inch diameter wire and shall have an outside diameter of 3/16 inch ± 1/64 inch the ends of the ring shall be together and in line. The second ring connected to the ribbon drapes shall be fabricated from 0.036 inch ± 0.002 inch diameter wire and shall have an outside diameter of 5/16 inch ± 1/64 inch the ends of the ring shall be together and in line.

3. Piercing shall be as indicated above.

4. The specification slash sheet for the ribbon for the neckband, pendant drape and service ribbon is MIL-DTL-11589/657

5. The specification slash sheet for the lapel button is MIL-DTL-11484/358.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T02:09Z
Check the source to verify that this is the current version before use.

6. The specification slash sheet for the ribbon attachment is MIL-DTL- 41819/52

7. Hard cloisonné enamel may be used in lieu of epoxy resin. If hard cloisonné enamel is used, then the base material must be Gilding Metal 95/5 (UNS Alloy No.C-210)

8. The manufacturer may deviate from MIL-DTL-3943 by using nickel underplating prior to applying the requisite 24K gold plating.

Epoxy resin will be applied to the Base of the badge as specified below and must match TIOH Hard Enamel Color Chip Numbers listed.

TIOH HARD ENAMEL COLOR CHIP NUMBER	LOCATION(S)
Red #1	Center disc of Hap Arnold Star
Blue #20	All Lettering on Designation Scrolls
White #28	Arms of Hap Arnold Star
Green #11	All Leaves of Laurel Wreath

CHANGES FROM PREVIOUS ISSUE: The margins of this specification are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodian:
Army - IH

Preparing activity:
Army – IH

Review activity:
DLA - CT

(Project No. 8455-2024-028)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T02:09Z
Check the source to verify that this is the current version before use.