INCH - POUND

MIL-DTL-3943/347
8 May 2012

DETAIL SPECIFICATION SHEET

DECORATION, FEDERAL LAW ENFORCEMENT, CONGRESSIONAL BADGE OF BRAVERY, U.S. DEPARTMENT OF JUSTICE

This specification is approved for use by all
Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the latest issue of MIL-DTL-3943.



PENDANT - OBVERSE



PENDANT - REVERSE



SUSPENSION STAR



ASSEMBLED - OBVERSE



ASSEMBLED - REVERSE

DASH NUMBERS:
-1: Pendant
-2 Suspension Star
-3: Assembled

MATERIAL (-1 and -2): Red Brass 85/15 (UNS Alloy No. C-230)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T02:12Z
Check the source to verify that this is the current version before use.

DIMENSIONS:

HEIGHT:

-1 (including lug): 1-13/16 inches (REF)

-2: 1 inch (REF)

-3: 2-9/16 inches ± 1/32 inch

WIDTH:

-1, -3: 1-5/8 inches (REF)

-2: 1 inch (REF)

THICKNESS:

-1 (across designation band): 0.175 inch ± 0.010 inch

-2 (at center of scroll): 0.115 ± 0.010 inch

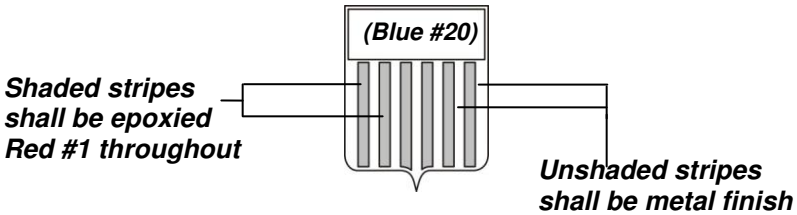
FINISH:

-1 (OBVERSE):

NICKEL: Center disc, outer scalloped area, and lettering and objects within designation band shall be Nickel Plated, Matte Finish, and shall match The Institute of Heraldry (TIOH) Metal Finish Chip Number 17.

GOLD: Borders of designation band, and the Congressional Seal (including stars) on center disc shall be Gold Plated, Matte Finish, Polished Highlights, and shall match TIOH Metal Finish Chip Number 8.

EPOXY: Epoxy enamel shall be applied as indicated below, and shall match TIOH Hard Enamel Color Chip Numbers listed:

TIOH HARD ENAMEL COLOR CHIP NUMBER	LOCATION
Red #1	Stripes of shield in Congressional Seal. Stripes shall alternate between metal finish and epoxy as shown: 
Blue #20	Designation Band and Chief of Shield in Congressional Seal

-1 (REVERSE):

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T02:12Z
Check the source to verify that this is the current version before use.

NICKEL: Center disc, outer scalloped area, and lettering and object within designation band shall be Nickel Plated, Matte Finish, and shall match TIOH Metal Finish Chip Number 17.

GOLD: Borders of designation Band, badge within center disc and lettering on badge shall be 24K Gold Plated, Matte Finish, Polished Highlights, and shall match TIOH Metal Finish Chip Number 8. The nameplate portion of the badge's surface shall be made suitable for engraving.

EPOXY: Hard epoxy enamel shall be applied as indicated below, and shall match TIOH Hard Enamel Color Chip Number listed:

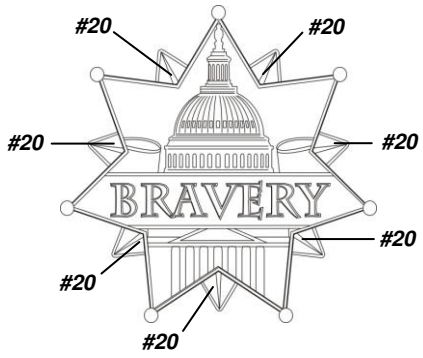
TIOH HARD ENAMEL COLOR CHIP NUMBER	LOCATION
Blue #20	Designation Band

-2:

NICKEL: Top star and Capitol Building shall be Nickel Plated, Matte Finish, and shall match TIOH Metal Finish Chip Number 17.

GOLD: Borders of top and bottom stars, scroll, and lettering on scroll shall be 24K Gold Plated, Matte Finish, Polished Highlights, and shall match TIOH Metal Finish Chip #8.

EPOXY: Hard epoxy enamel shall be applied as indicated below, and shall match TIOH Hard Enamel Color Chip Number listed:

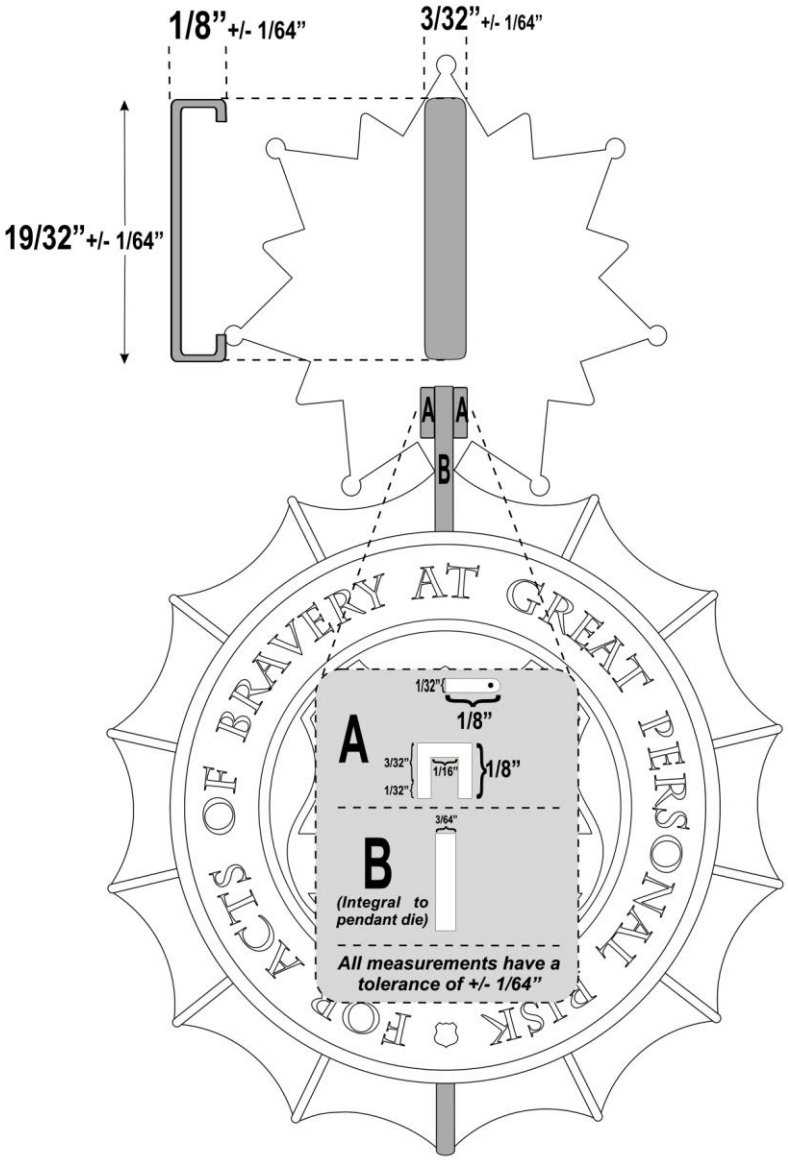
TIOH HARD ENAMEL COLOR CHIP NUMBER	LOCATION
Blue #20	Points of Bottom Star as shown: 

ATTACHING DEVICES:

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T02:12Z
Check the source to verify that this is the current version before use.

ATTACHING DEVICE FOR PENDANT AND SUSPENSION STAR: The suspension star shall be secured to the pendant by a hinge joint. The hinge shall be 1/8 inch ± 1/64 inch high by 1/8 inch ± 1/64 inch wide by 3/32 inch ± 1/64 inch deep (see illustration below). The hinge shall be hard soldered to the vertical center line of the suspension star 1/8 inch ± 1/64 inch up from the bottom-most point of the suspension star. The arm for the hinge joint is integral with the pendant.

ATTACHING DEVICE FOR PENDANT AND NECKBAND: The suspension ring through which the neckband passes shall be made of Red Brass 85/15 (UNS Alloy C-230), conform to the dimensions specified below. The pendant ring shall be hard soldered to the reverse of the suspension star as shown in such a way that it is not visible viewing the assembled decoration's obverse.



Source: https://assist.dla.mil -- Downloaded: 2026-10-17T02:12Z
Check the source to verify that this is the current version before use.

NECKBAND: The neckband shall conform to Figure 9 in the latest version of MIL-DTL-3943, except that the manufacturer may deviate from this drawing by increasing the finished length of the neckband to 26 inches + 1/2 inch - 0.

DECORATION CASE: The decoration set shall consist of a neckband with pendant and suspension star (assembled), a service ribbon with ribbon attachment, and a lapel button all packaged in a decoration case conforming to MIL-C-14633, Type VII, Style 5 with a Class 1 or 1A pad. The following shall be inscribed on the top of the decoration case using three lines: (Line 1) CONGRESSIONAL (Line 2) BADGE OF BRAVERY (Line 3) FEDERAL.

NOTES:

1. The term (REF) refers to the measurements taken from the obverse Government furnished hub or die.

2. The manufacturer may deviate from MIL-DTL-3943 by using nickel underplating prior to plating -1 and -2 with 24K gold.

3. Hard cloisonné enamel may be used in lieu of epoxy for -1 and -2. If hard cloisonné enamel is used, the required base material for -1 and -2 is Gilding Metal 95/5 (UNS Alloy C-210).

4. The ribbon for the neckband and service ribbon is MIL-DTL-11589/640.

5. The ribbon attachment is MIL-DTL-41819/50.

6. The lapel button is MIL-DTL-11484/341.

7. These items are not authorized for commercial sale, and may be produced only under Government contract and at the request of the U.S. Department of Justice.

Custodian:
Army - IH

Civil Agency:
DOJ – BJA

Preparing activity:
Army – IH

(Project No. 8455-2012-019)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T02:12Z
Check the source to verify that this is the current version before use.