NOT MEASUREMENT SENSITIVE

MIL-DTL-3943/347C
1 August 2022
SUPERSEDING
MIL-DTL-3943/347B
29 September 2017

DETAIL SPECIFICATION SHEET

DECORATION, FEDERAL LAW ENFORCEMENT, CONGRESSIONAL BADGE OF BRAVERY, U.S. DEPARTMENT OF JUSTICE

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the latest issue of MIL-DTL-3943.




PENDANT - OBVERSE




PENDANT - REVERSE



SUSPENSION STAR



ASSEMBLED - OBVERSE



ASSEMBLED - REVERSE

DASH NUMBERS:
-1: Pendant
-2 Suspension Star
-3: Assembled

MATERIAL (-1 and -2): Red Brass 85/15 (UNS Alloy No. C-230)

AMSC N/A

FSC 8455

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T02:11Z
Check the source to verify that this is the current version before use.

FINISH:

-1 (OBVERSE):

NICKEL: Center disc, outer scalloped area, and lettering and objects within designation band shall be Nickel Plated, Matte Finish, and shall match The Institute of Heraldry (TIOH) Metal Finish Chip Number 17.

GOLD: Borders of designation band, and the Congressional Seal (including stars) on center disc shall be Gold Plated, Matte Finish, Polished Highlights, and shall match TIOH Metal Finish Chip Number 8.

-1 (REVERSE):

NICKEL: Center disc, outer scalloped area, and lettering and object within designation band shall be Nickel Plated, Matte Finish, and shall match TIOH Metal Finish Chip Number 17.

GOLD: Borders of designation Band, badge within center disc and lettering on badge shall be 24K Gold Plated, Matte Finish, Polished Highlights, and shall match TIOH Metal Finish Chip Number 8. The nameplate portion of the badge's surface shall be made suitable for engraving.

-2: NICKEL: Top star and Capitol Building shall be Nickel Plated, Matte Finish, and shall match TIOH Metal Finish Chip Number 17.

GOLD: Borders of top and bottom stars, scroll, and lettering on scroll shall be 24K Gold Plated, Matte Finish, Polished Highlights, and shall match TIOH Metal Finish Chip #8.

DIMENSIONS:

HEIGHT:

-1 (including lug): 1-13/16 inches (REF

-2: 1 inch (REF)

-3: 2-9/16 inches ± 1/32 inch

WIDTH:

-1, -3: 1-5/8 inches (REF)

-2: 1 inch (REF)

THICKNESS:

-1 (across designation band): 0.175 inch ± 0.010 inch

-2 (at center of scroll): 0.115 ± 0.010 inch

ATTACHING DEVICES:


ATTACHING DEVICE FOR PENDANT AND SUSPENSION STAR: The suspension star shall be secured to the pendant by a hinge joint. The hinge shall be 1/8 inch ± 1/64 inch high by 1/8 inch ± 1/64 inch wide by 3/32 inch ± 1/64 inch deep (see illustration below). The hinge shall be hard soldered to the vertical center line of the suspension star 1/8 inch ± 1/64 inch up from the bottom-most point of the suspension star. The arm for the hinge joint is integral with the pendant.


ATTACHING DEVICE FOR PENDANT AND NECKBAND: The suspension ring through which the neckband passes shall be made of Red Brass 85/15 (UNS Alloy C-230), conform to the dimensions specified below. The pendant ring shall be hard soldered to the reverse of the suspension star as shown in such a way that it is not visible viewing the assembled decoration's obverse.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T02:11Z
Check the source to verify that this is the current version before use.

EPOXY: Epoxy resin shall be applied to the lapel button as indicated above, and shall match TIOH Hard Enamel Color Chip Numbers listed below

TIOH HARD ENAMEL COLOR CHIP NUMBER	LOCATION
Blue #20	Stripes of shield in Congressional Seal. Stripes shall alternate between metal finish and epoxy as shown, Points of Bottom Star and Designation Band and Chief of Shield in Congressional Seal
Red #1	*Shaded stripes shall be epoxied Red #1 throughout*

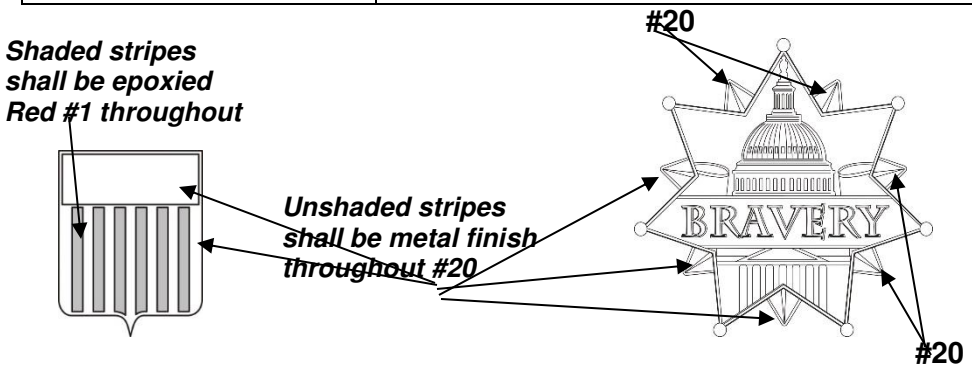

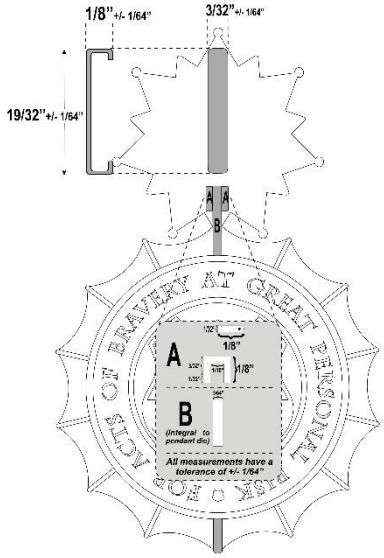

NECKBAND: The neckband shall conform to Figure 9 in the latest version of MIL-DTL-3943, except that the manufacturer may deviate from this drawing by increasing the finished length of the neckband to 26 inches + 1/2 inch - 0.

DECORATION CASE: The decoration set shall consist of a neckband with pendant and suspension star (assembled), a service ribbon with ribbon attachment, and a lapel button all packaged in a decoration case conforming to MIL-DTL-14633, Type VII, Style 5 with a Class 1 or 1A pad. The following shall be inscribed on the top of the decoration case using three lines: (Line 1) CONGRESSIONAL (Line 2) BADGE OF BRAVERY (Line 3) FEDERAL.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T02:11Z
Check the source to verify that this is the current version before use.

NOTES:

1. The term (REF) refers to the measurements taken from the obverse Government furnished hub or die.

2. The manufacturer may deviate from MIL-DTL-3943 by using nickel underplating prior to plating -1 and -2 with 24K gold.

3. Hard cloisonné enamel may be used in lieu of epoxy for -1 and -2. If hard cloisonné enamel is used, the required base material for -1 and -2 is Gilding Metal 95/5 (UNS Alloy C-210).

4. The specification slash sheet for the ribbon for the neckband and for the service ribbon is MIL-DTL-11589/640.

5. The specification slash sheet for the ribbon attachment is MIL-DTL-41819/50.

6. The specification slash sheet for the lapel button is MIL-DTL-11484/341.

7. These items are not authorized for commercial sale, and may be produced only under Government contract and at the request of the U.S. Department of Justice.

CHANGES FROM PREVIOUS ISSUE: The margins of this specification are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodian:
Army - IH

Preparing activity:
Army - IH

Review Activity:
DLA - CT

(Project No. 8455-2022-146)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T02:11Z
Check the source to verify that this is the current version before use.