INCH - POUND

MIL-DTL-3943/354
31 October 2012


DETAIL SPECIFICATION SHEET

DECORATION, CROSS, U.S. COAST GUARD


This specification is approved for use by all
Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the latest issue of MIL-DTL-3943.

All Shaded areas to be pierced for -1 and -2

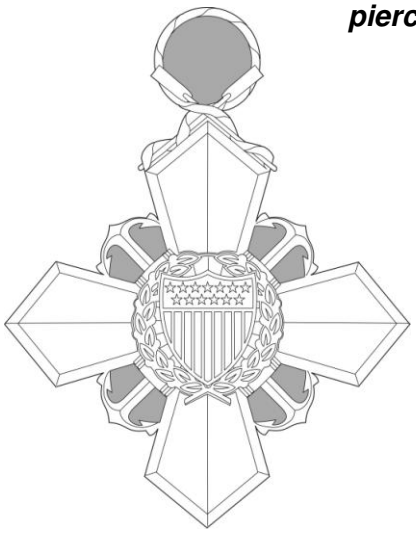

OBVERSE

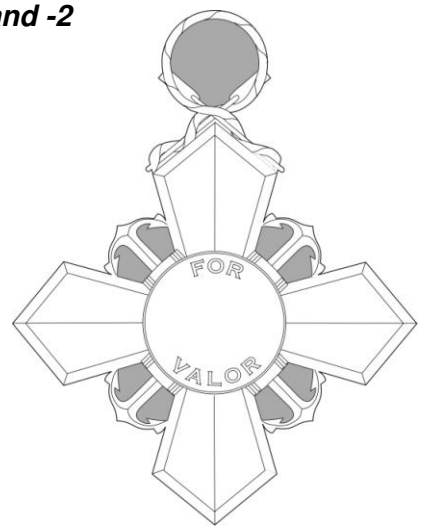

REVERSE

DASH NUMBER:
-1 Regular Size Pendant
-2 Miniature Size Pendant

MATERIAL (-1 and -2): Red Brass 85/15 (UNS Alloy No. C-230)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T02:14Z
Check the source to verify that this is the current version before use.

DIMENSIONS:

HEIGHT (including integral suspension ring):

-1: 2-1/4 inches

-2: 1-1/8 inches

WIDTH:

-1: 1-3/4 inches

-2: 7/8 inch

THICKNESS (at center):

-1: 0.188 inch ± 0.010 inch

-2: 0.160 inch ± 0.010 inch


PIERCINGS: Piercings for -1 and -2 shall be as indicated above.

FINISH (-1 and -2): 24K Gold Plated, Matte Finish, Polished Highlights, and shall match The Institute of Heraldry (TIOH) Metal Finish Chip Number 8.

EPOXY (-1 and -2, Obverse only): Epoxy shall be applied to the center insignia as specified below, and shall match TIOH Hard Enamel Color Chip Numbers listed below. Hard cloisonné enamel may be used in lieu of epoxy. If hard cloisonné enamel is used, the required base material shall be Gilding Metal 95/5 (UNS Alloy C-210).

TIOH HARD ENAMEL COLOR CHIP NUMBER	LOCATION(S)
Red #1	-1 and -2 (Obverse): Alternating stripes of shield, as shown:  ***All dark stripes Shall be epoxied Red #1***
Transparent Green #11	-1 and -2 (Obverse): All Leaves of Wreath

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T02:14Z
Check the source to verify that this is the current version before use.

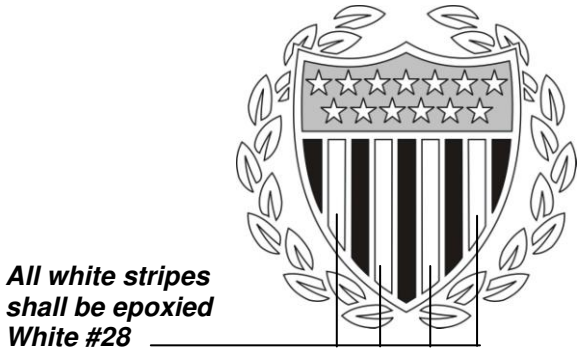Blue #20	-1 and -2 (Obverse): Chief of shield, as shown: 
White #28	-1 and -2 (Obverse): Alternating stripes of shield, as shown: 

DECORATION SET AND CASE: Decoration set shall consist of a regular size medal, a miniature size medal, a lapel button, and a service ribbon, and shall be arranged in accordance with MIL-C-14633 in a Type XVIII, Style 7 case with a Class 2 pad. The decoration name shall be written on the case as such: on Line 1 the words “COAST GUARD” and on Line 2 the word “CROSS”.

NOTES:

1. The term (REF) refers to the measurements taken from the Government furnished obverse hub or die.

2. For both -1 and -2, the manufacturer may deviate from MIL-DTL-3943 by using nickel underplating prior to plating with 24K gold.

3. The specification slash sheet for the ribbon for the pendant drape and service ribbon is MIL-DTL-11589/641.

4. The specification slash sheet for the lapel button is MIL-DTL-11484/351.

5. This item is not authorized for commercial sale, and may be produced only under Government contract and at the request of the U.S. Coast Guard.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T02:14Z
Check the source to verify that this is the current version before use.

Custodians:
Army - IH
Navy - CG1

Preparing activity:
Army - IH

(Project No. 8455-2012-152)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T02:14Z
Check the source to verify that this is the current version before use.