INCH-POUND


MIL-DTL-3943/358
15 October 2013

DETAIL SPECIFICATION SHEET

MEDAL, CIVILIAN SERVICE ACHIEVEMENT MEDAL,
MILITARY SEALIFT COMMAND, U.S. NAVY

This specification is approved for use by all
Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet, the latest issue of MIL-DTL-3943.

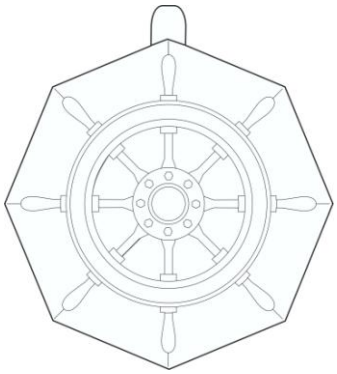

OBVERSE



REVERSE

DASH NO.
-1: Regular Size Pendant
-2: Miniature Size Pendant

MATERIAL: (-1 and -2): Red Brass 85/15 (UNS Alloy C-230)

FINISH: (-1 and -2): Brass, Oxidized, Buffed Relieved and shall match The Institute of Heraldry Metal Finish Chip Number 4.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T02:15Z
Check the source to verify that this is the current version before use.

DIMENSIONS:
HEIGHT (including lug):
-1: 1-3/8 inches (REF)
-2: 11/16 inch (REF)
WIDTH:
-1: 1-1/4 inches (REF)
-2: 5/8 inch (REF)
THICKNESS (at center):
-1: 0.145 inch ± 0.010 inch
-2: 0.105 inch ± 0.010 inch

DECORATION SET: The decoration set shall be packaged in a presentation case and shall consist of a regular size medal, a miniature size medal, a lapel button and a service ribbon, and shall be arranged in accordance with MIL-C-14633 in a Type XVI case with a Type XVI Class 2 or Type XVI Class 4 pad.

NOTES:
1. The term (REF) refers to the measurements taken from the Government furnished hub or die.

2. The specification slash sheet for the ribbon for the pendant drape and service ribbon is MIL-DTL-11589/656.

3. The specification slash sheet for the lapel button is MIL-DTL-11484/357.

Custodians:
Army - IH
Navy - NU

Preparing activity:
Army - IH

Review activity:
DLA - CT

(Project No. 8455-2013-196)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T02:15Z
Check the source to verify that this is the current version before use.