NOT MEASUREMENT SENSITIVE


MIL-DTL-3943/360B(IH)
2 January 2024
SUPERSEDING
MIL-DTL-3943/360A(IH)
27 February 2019

DETAIL SPECIFICATION SHEET

DECORATION, GEORGE WASHINGTON SPYMASTER MEDAL, OFFICE OF THE DIRECTOR OF NATIONAL INTELLIGENCE

This specification is approved for use by all Departments and Agencies of the Department of Defense


The requirements for acquiring the product described herein shall consist of this specification sheet and the latest issue of MIL-DTL-3943, and a request from the Office of the Director of National Intelligence.

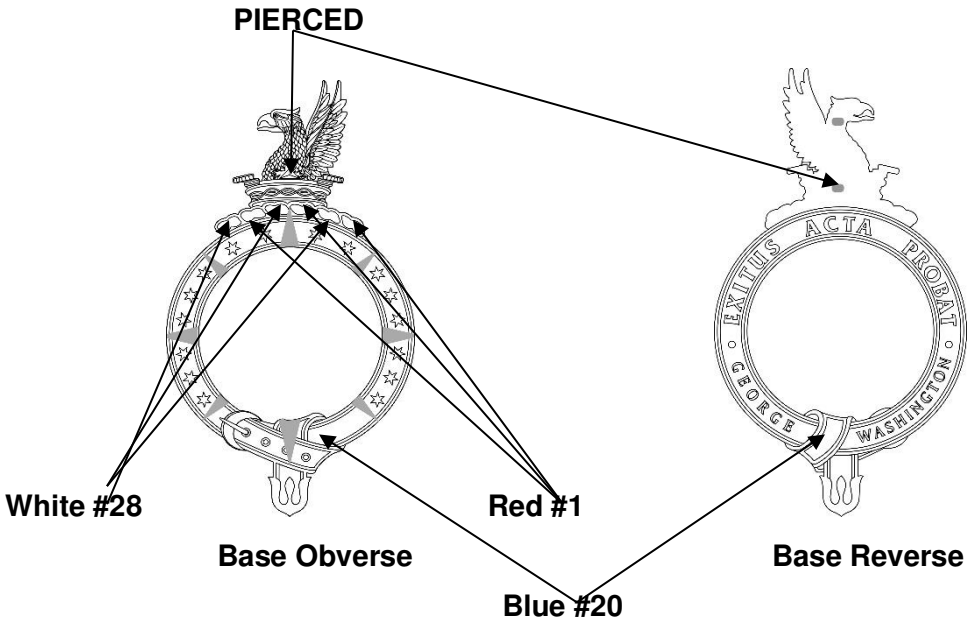


AMSC N/A

FSC 8455


Source: https://assist.dla.mil -- Downloaded: 2026-10-17T02:15Z
Check the source to verify that this is the current version before use.

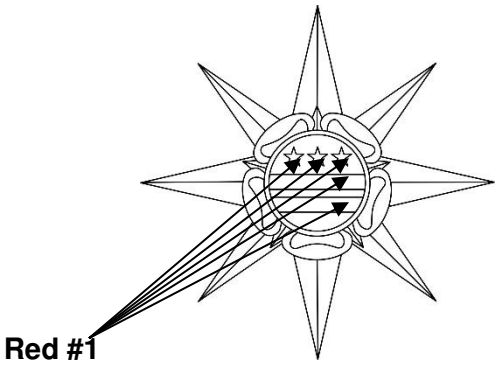


Device Obverse

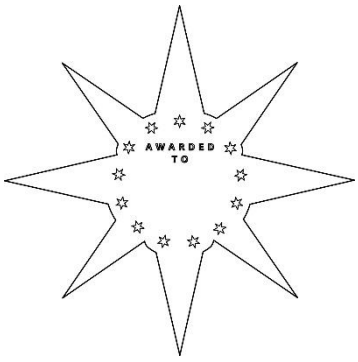

Device Reverse

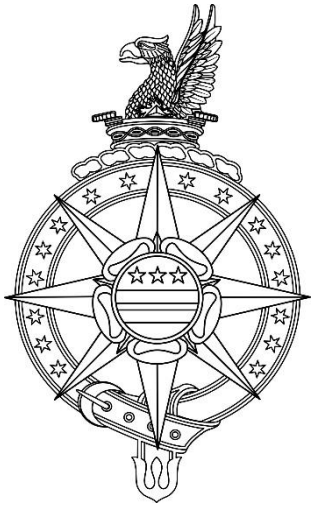

Obverse Assembled

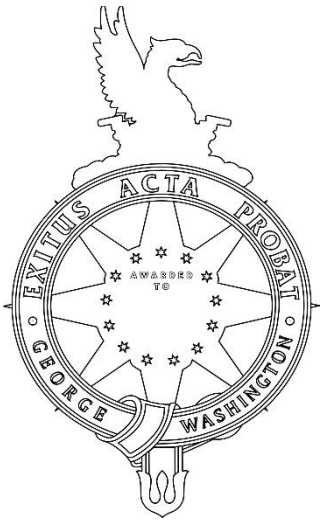

Reverse Assembled

DASH NO.
-1: Regular Size
-2: Miniature Size

MATERIAL (-1 and -2): Red Brass 85/15 (UNS Alloy No. C230)


FINISH:
BASE (Obverse and Reverse): Silver Plated, Oxidized, Buffed Relieved, Matte Finish, Polished Highlights and shall match The Institute of Heraldry (TIOH) Metal Finish Chip Number 15.
DEVICE:
OBVERSE:
GOLD AREA: 24K Gold Plated, Matte Finish and shall match TIOH Metal Finish Chip Number 7, on star arms.
SILVER AREA: Nickel Plated, Matte Finish, Polished Highlights and shall match TIOH Metal Finish Chip Number 18 on rose, center rim of the disc and garter belt.
REVERSE: 24K Gold Plated, Matte Finish and shall match TIOH Metal Finish Chip Number 7, on stars arms. 24K Gold Plated, Matte Finish, Polished Highlights and shall match TIOH Metal Finish Chip Number 8, on wording “awarded to” and stars.
DIMENSIONS:

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T02:15Z
Check the source to verify that this is the current version before use.

HEIGHT (Including integral suspension):
-1: 2-15/16 inches (REF)
-2: 1-1/8 inch (REF)
WIDTH:
-1: 1-5/8 inches (REF)
-2: 21/32 inch (REF)
THICKNESS:
-1: 0.308 ± 0.010 inch
-2: 0.130 ± 0.010 inch

DECORATION SET: The decoration set shall consist of a regular size pendant with neckband, a miniature size pendant with pendant drape, a lapel button, and a service ribbon with ribbon attachment all packaged in a presentation case conforming to MIL-DTL-14633, Type II, Style 3, with a class 2 pad. The following text shall be inscribed on the top of the presentation case using three lines: (Line 1) NATIONAL INTELLIGENCE (Line 2) GEORGE WASHINGTON (Line 3) SPYMASTER.

SUSPENSION RING: The suspension ring through which the neckband passes will be made of Red Brass (UNS Alloy C-230) and must match the metal finish specified above for -1 Base. The suspension ring shall conform to the dimensions specified below, and be hard soldered to the pendant's reverse in such a way that: (1) the solder-point is flush and clean so as not to cause abrasions or obstructions to the neckband when it is inserted, and (2) so that the suspension ring is not visible when viewing the pendant's obverse:

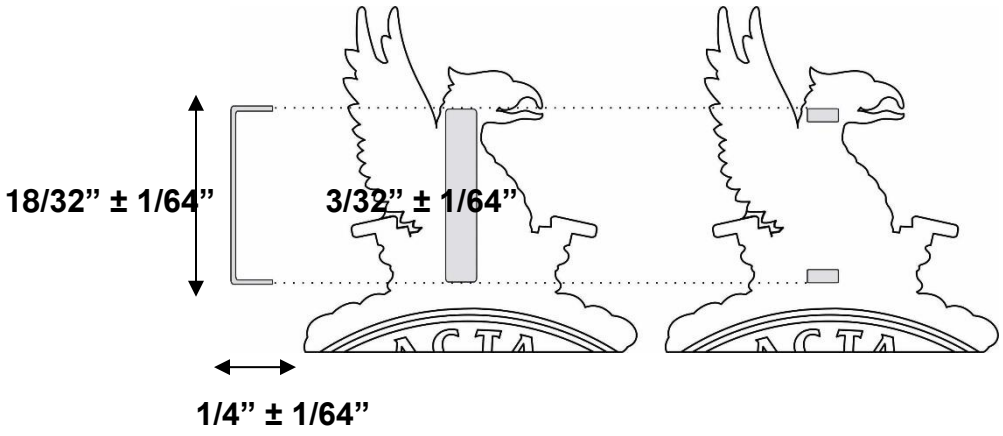

NOTES:
1. The term (REF) refers to the measurements taken from the Government furnished hub or die.

2. The suspension lug will be located along the vertical center line of the crest on miniature-size pendant's reverse and will be fabricated from 0.040 ± 0.003 inch nominal diameter wire. The lug will have an outside diameter of 5/32 inch ± 1/64 inch, and must have a sufficient internal diameter for the ribbon drape's suspension ring to pass through.

3. Piercing shall be as indicated above.

4. The specification slash sheet for the ribbon for the neckband, pendant drape and service ribbon is MIL-DTL-11589/653

5. The specification slash sheet for the lapel button is MIL-DTL-11484/359.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T02:15Z
Check the source to verify that this is the current version before use.

6. The specification slash sheet for the ribbon attachment is MIL-DTL- 41819/53

7. Hard cloisonné enamel may be used in lieu of epoxy resin. If hard enamel is used, then the base material must be Gilding Metal 95/5 (UNS Alloy No.C-210)

8. The manufacturer may deviate from MIL-DTL-3943 by using nickel underplating prior to applying the requisite 24K gold plating.

9. These items are not authorized for commercial sale and may be produced only under Government contract and at the request of the office of the Director of Intelligence.

Epoxy resin will be applied to the Base of the badge as specified below and must match TIOH Hard Enamel Color Chip Numbers listed.

TIOH HARD ENAMEL COLOR CHIP NUMBER	LOCATION(S)
Red #1	Braids of Wreath, Stars and stripes Center Disc
Blue #20	Garter Belt Obverse and Reverse
White #28	Braids of Wreath

CHANGES FROM PREVIOUS ISSUE: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodian:
Army - IH

Preparing activity:
Army – IH

Review activity:
DLA - CT

(Project No. 8455-2024-043)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T02:15Z
Check the source to verify that this is the current version before use.