
MIL-B-10955 / 28D
15 December 1986
SUPERSEDING
MIL-B-10955 / 28C
31 December 1971

MILITARY SPECIFICATION SHEET

BADGE, QUALIFICATION, AVIATION; AIRCRAFT CREWMAN, ARMY

This specification is approved for use by all Departments and Agencies of the Department of Defense. The complete requirements for procuring the item(s) described herein shall consist of this document and the issue in effect of Specification MIL-B-10955.

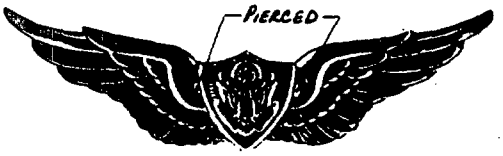

DASH NOS.
-1: REGULAR SIZE
-2: MINIATURE SIZE
-3: REGULAR SIZE, SUBDUED
-4: DRESS MINIATURE

MATERIAL:
-1,-2,-4: RED BRASS OR NICKEL SILVER
-3: RED BRASS

DIMENSIONS (INCHES):
HEIGHT (OVERALL):
-1,-3: 3/4 (REF)
-2: 2 (REF)
-4: 21/64 (REF)
WIDTH (OVERALL):
-1,-3: 2-1/2 (REF)
-2: 2 (REF)
-4: 1-1/4 (REF)
THICKNESS (AT THICKEST POINT OF WING):
-1,-3: .110 ± .010
-2,-4: .090 ± .005

FINISH:
-1,-2,-4: NICKEL PLATED (RED BRASS ONLY), SILVER PLATED, OXIDIZED, RELIEVED, SATIN FINISH
-3: DULL, FLAT BLACK ENAMEL FINISH

NOTES:
1. DASH NOS. 1, 2 AND 4 MAY BE MADE FROM STERLING SILVER FOR COMMERCIAL SALE AND IF SO THE THICKNESS DIMENSIONS GIVEN SHALL BE USED FOR REFERENCE ONLY. THE WEIGHTS SPECIFIED BELOW SHALL GOVERN. THE FINISH FOR STERLING SILVER BADGES SHALL BE AS SPECIFIED EXCEPT THE REQUIREMENTS FOR SILVER PLATING SHALL NOT APPLY.

WEIGHT (MINIMUM): -1: 130 GRAINS
-2: 90 GRAINS
-4: 25 GRAINS

2. THE PRONGS SHALL BE LOCATED ON THE HORIZONTAL CENTERLINE EQUIDISTANT FROM THE ENDS. THE PRONGS SHALL BE 1-3/4 ± 1/32 INCHES ON CENTERS FOR DASH NO. 1 AND 3, 1-1/2 ± 1/32 INCHES ON CENTERS FOR DASH NO. 2 AND 7/8 ± 1/32 ON CENTERS FOR DASH NO. 4.

3. A MOCK FORCER MAY BE USED TO BRING UP THE DESIGN ON THE SHIELD FOR DASH NOS. 1, 2 AND 3 ONLY.

Custodians:
Army - IH

Review activities:
DLA - CT

Preparing activity:
Army - IH

(Project No. 8455 - 0303)

FSC 8455

AMSC N/A
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T14:45Z
Check the source to verify that this is the current version before use.