NOT MEASUREMENT SENSITIVE


MIL-B-10955/36B
14 September 1990
SUPERSEDING
MIL-B-10955/36A
15 December 1986

MILITARY SPECIFICATION SHEET

BADGE, QUALIFICATION, AVIATION; FLIGHT SURGEON, NAVY

This specification is approved for use by all Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-B-10955.

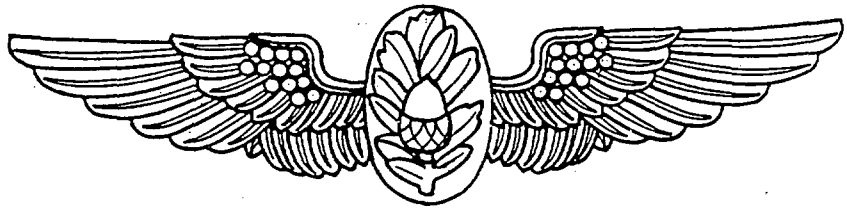

MATERIAL: Red brass

DASH NO:
-1: Regular Size
-2: Miniature Size

DIMENSIONS:
HEIGHT (Overall):
-1: 5/8 inch (1.59 cm) (REF)
-2: 3/8 inch (0.95 cm) (REF)
WIDTH (Overall):
-1: 2-3/4 inches (6.99 cm) (REF)
-2: 1-9/16 inches (3.97 cm) (REF)
THICKNESS:
-1: .080 inch ± .005 inch (0.203 cm ± 0.012 cm) (Thickest part of wing)
-2: .090 inch ± .005 inch (0.228 cm ± 0.012 cm) (Thickest part of shield)

FINISH:
WINGS, CENTER AND LEAF: Gold plated, brightly polished finish.
ACORN: Nickel plated, mirror-like polished.

NOTES:
1. Attaching device shall be prong and clutch type. Prongs shall be located on the horizontal centerline, equidistance from each end and the following distance apart:

   -1: 2-1/4 inches ± 1/32 inch (5.72 cm ± 0.08 cm)
   -2: 1-1/4 inches ± 1/32 inch (3.18 cm ± 0.08 cm)

2. A mock forcer may be used to bring up the design of the oval shield for Dash No. 1 only.
3. The acorn may be rhodium plated, mirror-like polished at the option of manufacturer.

Custodians:
Army - IH
Air Force - NU

Preparing activity:
Army - IH

Review activities:
DLA - CT

(Project No. 8455-0537)

AMSC N/A

FSC 8455

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T14:47Z
Check the source to verify that this is the current version before use.