
MIL-B-10955 / 40B
15 December 1986
SUPERSEDING
MIL-B-10955 / 40A
20 November 1984

MILITARY SPECIFICATION SHEET

BADGE, QUALIFICATION, AVIATION, AVIATOR/ASTRONAUT, ARMY

This specification is approved for use by all Departments and Agencies of the Department of Defense. The complete requirements for procuring the item(s) described herein shall consist of this document and the issue in effect of Specification MIL-B-10955.

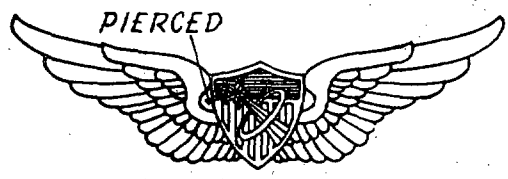

DASH NOS.
- -1: REGULAR
- -2: MINIATURE
- -3: DRESS MINIATURE
- -4: SUBDUED

MATERIAL:
- -1,-2,-3: RED BRASS OR NICKEL SILVER
- -4: RED BRASS

DIMENSIONS (INCHES):

BASE:

HEIGHT (OVERALL):
- -1,-4: 3/4 (REF)
- -2: 15/32 (REF)
- -3: 21/64 (REF)

WIDTH (OVERALL):
- -1,-4: 2-1/2 (REF)
- -2: 2 (REF)
- -3: 1-1/4 (REF)

THICKNESS (AT THICKEST POINT OF WINGS):
- -1,-4: .110 ± .010
- -2,-3: .085 ± .005

FINISH:
- -1,-2,-3: NICKEL PLATED (RED BRASS ONLY), SILVER PLATED, LIGHTLY OXIDIZED, RELIEVED, SATIN FINISH. HIGHLIGHTS OF SHIELD POLISHED.
- -4: DULL, FLAT BLACK ENAMEL FINISH

DEVICE:

LENGTH (STAR):
- -1,-4: 3/8 (REF)
- -2: 9/32 (REF)
- -3: 5/32 (REF)

THICKNESS (MINIMUM):
- -1,-2,-3,-4: .30

FINISH:
- -1,-2,-3: POLISHED, GOLD PLATED FINISH
- -4: DULL, FLAT BLACK ENAMEL

ASSEMBLED THICKNESS (AT THICKEST POINT):
- -1,-4: .160 ± .010 (REF)
- -2: .150 ± .010 (REF)
- -3: .140 ± .010 (REF)

NOTES:

1. THE BASE FOR DASH NOS. 1,2 AND 3 MAY BE MADE FROM STERLING SILVER FOR COMMERCIAL SALE AND, IF SO, THE THICKNESS REQUIREMENTS SHALL NOT APPLY AND THE WEIGHT SPECIFIED BELOW SHALL GOVERN. THE FINISH REQUIREMENTS SHALL BE AS SPECIFIED EXCEPT THE NICKEL AND SILVER PLATING REQUIREMENTS SHALL NOT APPLY.

WEIGHTS (MINIMUM): -1: 130 GRAINS; -2: 90 GRAINS; -3: 25 GRAINS

2. ATTACHING DEVICE SHALL BE PRONG AND CLUTCH TYPE. THE PRONG SHALL BE LOCATED ON THE HORIZONTAL CENTERLINE EQUIDISTANT FOR EACH END. THE CENTER TO CENTER DISTANCE BETWEEN THE PRONGS SHALL BE AS FOLLOWS.

- -1,-4: 1-3/4 ± 1/32 INCH
- -2: 1-1/2 ± 1/32 INCH
- -3: 7/8 ± 1/32 INCH

3. PIERCING OF THE BASIC BADGE SHOWN IS FOR DASH NUMBERS -1 AND -4 ONLY. PIERCING FOR -2 IS IDENTICAL TO -1 AND -4, EXCEPT THE AREA BETWEEN THE STAR AND SHIELD IS NOT PIERCED. THE AREA BETWEEN THE SHOOTING STAR RAYS AND THE ORBIT RING SHALL BE PIERCED FOR -1 AND -4, RECESSED FOR -2 AND 3.

4. A MOCK FORCER MAY BE USED TO BRING UP THE DESIGN OF THE SHIELD AND STAR ONLY.

5. THE DEVICE SHALL BE SOFT SOLDER OR RIVETED TO THE BASE IN THE LOCATION SHOWN.

Custodians:
Army - IH
Review activities:
DLA - CT

Preparing activity:
Army - IH
(Project No. 8455 - 0303)

FSC 8455

AMSC N/A

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T14:48Z
Check the source to verify that this is the current version before use.