NOT MEASUREMENT SENSITIVE


MIL-B-10955/40C
16 April 1991
SUPERSEDING
MIL-B-10955/40B
15 December 1986

MILITARY SPECIFICATION SHEET

Badge, Qualification, Aviation; Aviator/Astronaut, Army

This specification is approved for use by all Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-B-10955.

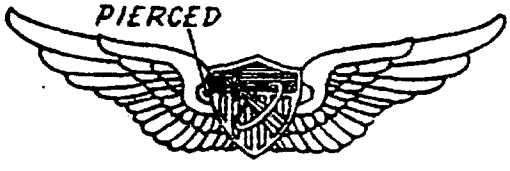

MATERIAL:
-1,-2,-3: Red brass or nickel silver
-4: Red brass

DASH NO:
-1: Regular
-2: Miniature
-3: Dress Miniature
-4: Subdued

DIMENSIONS:
BASE:
HEIGHT (Overall):
-1,-4: 3/4 inch (1.91 cm) (REF)
-2: 15/32 inch (1.19 cm) (REF)
-4: 21/64 inch (0.83 cm) (REF)

WIDTH (Overall):
-1,-4: 2-1/2 inches (6.35 cm) (REF)
-2: 2 inches (5.08 cm) (REF)
-3: 1-1/4 inch (3.18 cm) (REF)

THICKNESS (At Thickest Point of Wings):
-1,-4: .110 inch ± .010 inch (0.279 cm ± 0.025 cm)
-2,-3: .085 inch ± .005 inch (0.215 cm ± 0.012 cm)

FINISH:
-1,-2,-3: Nickel plated (Red brass only), silver plated , oxidized, relieved, satin finish with the highlights of the shield mirror-like polished
-4: Dull, flat black enamel finish

AMSC N/A FSC 8455
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T14:48Z
Check the source to verify that this is the current version before use.

DEVICE:
LENGTH (Star):
-1,-4: 3/8 inch (0.95 cm) (REF)
-2: 9/32 inch (0.71 cm) (REF)
-3: 5/32 inch (0.40 cm) (REF)
THICKNESS (Minimum):
-1,-2,-3,-4: .30 inch (0.076 cm)
FINISH:
-1,-2,-3: Gold plated, polished
-4: Dull, flat black enamel

ASSEMBLED THICKNESS (At thickest point):
-1,-4: .160 inch ± .010 inch (0.406 cm ± 0.025 cm)
-2: .150 inch ± .010 inch (0.381 cm ± 0.025 cm)
-3: .140 inch ± .010 inch (0.355 cm ± 0.025 cm)

NOTES:
1. Attaching device shall be prong and clutch type. The prongs shall be located on the horizontal centerline, equidistant from each end and the following distance apart:

Dash No. 1 and 4:	1-3/4 inch ± 1/32 inch (4.45 cm ± 0.08 cm)
Dash No. 2:	1-1/2 inch ± 1/32 inch (3.81 cm ± 0.08 cm)
Dash No. 3:	7/8 inch ± 1/32 inch (2.22 cm ± 0.08 cm)

2. Dash No. 1, 2 and 3 may be nickel or rhodium plated with a mirror-like polished finish for commercial sale except the silver plating requirement shall not apply.

3. Piercing of the basic badge shown is for dash numbers -1 and -4 only. Piercing for -2 is identical to -1 and -4, except the area between the star and shield is not pierced. The area between the shooting star rays and the orbit ring shall be pierced for -1 and -4, recessed for -2 and 3.

4. A mock forcer may be used to bring up the design of the shield and star only.

5. The device shall be soft soldered or riveted to the base in the location shown.

Custodian:
Army - IH

Review Activity:
DLA - CT

Preparing Activity:
Army - IH

(Projected No. 8455-A585)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T14:48Z
Check the source to verify that this is the current version before use.