MILITARY SPECIFICATION SHEET

BADGE, QUALIFICATION, AVIATION, NATIONAL OCEANIC AND ATMOSPHERIC ADMINISTRATION

This specification is approved for use by all Departments and Agencies of the Department of Defense. The complete requirements for procuring the item(s) described herein shall consist of this document and the issue in effect of Specification MIL-B-10955.

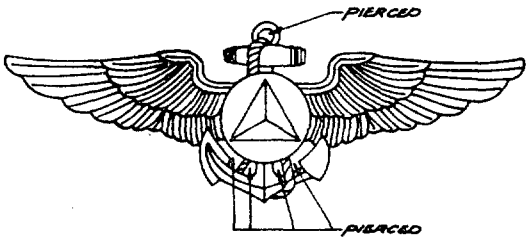

DASH NOS.
-1: REGULAR
-2: MINIATURE

MATERIAL: RED BRASS

DIMENSIONS (INCHES):
HEIGHT (OVERALL):
-1: 31/32 (REF)
-2: 1/2 (REF)
WIDTH (OVERALL):
-1: 2-13/16 (REF)
-2: 1-13/32 (REF)
THICKNESS (AT THICKEST POINT)
-1: .140 ± .010 (REF)
-2: .125 ± .005 (REF)

FINISH: GOLD PLATED, SATIN FINISH WITH POLISHED HIGHLIGHTS

NOTES:
1. ATTACHING DEVICE SHALL BE PRONG AND CLUTCH TYPE. THE PRONGS SHALL BE LOCATED ON THE HORIZONTAL CENTERLINE EQUIDISTANT FOR EACH END. THE CENTER TO CENTER DISTANCE BETWEEN THE PRONGS SHALL BE AS FOLLOW:

-1: 2-1/8 ± 1/16
-2: 1-1/8 ± 1/32

2. A MOCK FORCER MAY BE USED TO BRING UP THE DESIGN OF THE SHIELD AND ANCHOR.
3. PIERCING OF THE BASIC BADGE SHOWN IS FOR REGULAR SIZE ONLY.

Custodians:
Army - IH

Review activities:
DLA - CT

User activities:
Other - NOAA

Preparing activity:
Army - IH

(Project No. 8455 - 0281)

FSC 8455

AMSC N/A
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T14:48Z
Check the source to verify that this is the current version before use.