NOT MEASUREMENT SENSITIVE


MIL-B-10955/44A
20 December 1994
SUPERSEDING
MIL-B-10955/44
21 August 1992

MILITARY SPECIFICATION SHEET


BADGE, QUALIFICATION, AVIATION; ASTRONAUT DEVICE FOR AVIATOR, FLIGHT SURGEON AND AIRCRAFT CREWMAN, ARMY

This specification is approved for use by all Departments and Agencies of the Department of Defense


The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-B-10955.

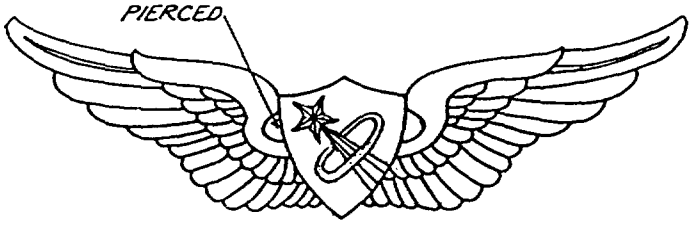

AVIATION BADGE WITH ASTRONAUT DEVICE

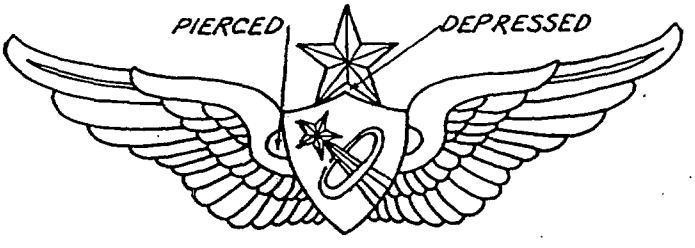

SENIOR AVIATION BADGE WITH ASTRONAUT DEVICE

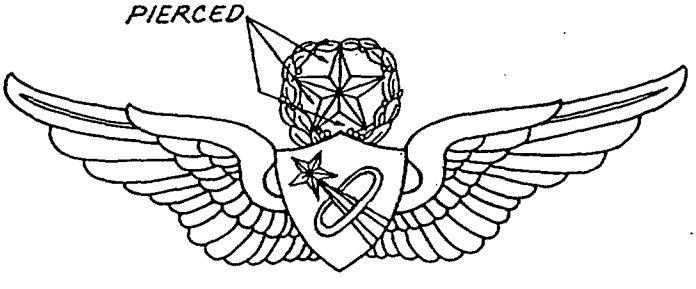

MASTER AVIATION BADGE WITH ASTRONAUT DEVICE

DASH NO.
-1: Regular Size
-2: Miniature Size
-3: Dress Miniature Size
-4: Regular Size, Subdued

AMSC N/A

FSC 8455

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T14:48Z
Check the source to verify that this is the current version before use.

FINISH:
-1, -2, -3: Gold Plated, Mirror-like Polished and shall match TIOH Metal Finish Chip Number 6.
-4: Dull, Flat Brown Enamel Finish.

DIMENSIONS (DEVICE):
HEIGHT (Overall):
-1, -4: 15/32 inch (1.19 cm) (REF)
-2: 3/8 inch (0.95 cm) (REF)
-3: 15/64 inch (0.60 cm) (REF)

WIDTH (Overall):
-1, -4: 11/32 inch (0.87 cm) (REF)
-2: 9/32 inch (0.71 cm) (REF)
-3: 11/64 inch (0.44 cm) (REF)

THICKNESS (At Thickest Point): 0.050 inch ± 0.005 inch (0.127 cm ± 0.012 cm)

NOTES:
1. The term (REF) refers to measurements taken from the Government furnished hub or die.

2. When specified in acquisition documents, an astronaut device shall be affixed to the shield portion of the Army Aviator, Army Flight Surgeon, and Army Aircraft Crewman badges as shown on TIOH Drawing B-5-84. That portion of the design element of the flight surgeon and aircraft crewman badges to which the astronaut device will be affixed shall be recessed sufficiently to provide a flat platform to which the device shall be soldered. At the option of the manufacturer, the platform may be cut into the working die.

3. Badges with the astronaut device attached shall be manufactured in accordance with the latest revision to the following specification sheets:

MIL-B-10955/1	Badge, Qualification, Aviation, Aviator, Army
MIL-B-10955/2	Badge, Qualification, Aviation, Senior Aviator, Army
MIL-B-10955/3	Badge, Qualification, Aviation, Master Aviator, Army
MIL-B-10955/17	Badge, Qualification, Aviation, Flight Surgeon, Army
MIL-B-10955/18	Badge, Qualification, Aviation, Senior Flight Surgeon, Army
MIL-B-10955/19	Badge, Qualification, Aviation, Master Flight Surgeon, Army
MIL-B-10955/28	Badge, Qualification, Aviation, Aircraft Crewman, Army
MIL-B-10955/29	Badge, Qualification, Aviation, Senior Aircraft Crewman, Army
MIL-B-10955/30	Badge, Qualification, Aviation, Master Aircraft Crewman, Army

4. The dull flat brown enamel for Dash No. 4 shall match FED-STD-595, Chip No. 20095.

Custodian:
Army - IH
Review activities:
DLA - CT

Preparing activities:
Army - IH
(Project No. 8455-0788)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T14:48Z
Check the source to verify that this is the current version before use.