
MIL-C-81511/19C
5 June 1970
SUPERSEDING
MIL-C-81511/19B(NAVY)
23 September 1969


MILITARY SPECIFICATION SHEET


CONNECTORS, ELECTRICAL, CIRCULAR, HIGH DENSITY, QUICK DISCONNECT, ENVIRONMENT RESISTING; AND ACCESSORIES; RECEPTACLE, DUMMY STOWAGE (SERIES 2)

The complete requirements for procuring the connector described herein shall consist of this document and the latest issue of Specification MIL-C-81511.

This specification is mandatory for use by all Departments and Agencies of the Department of Defense.

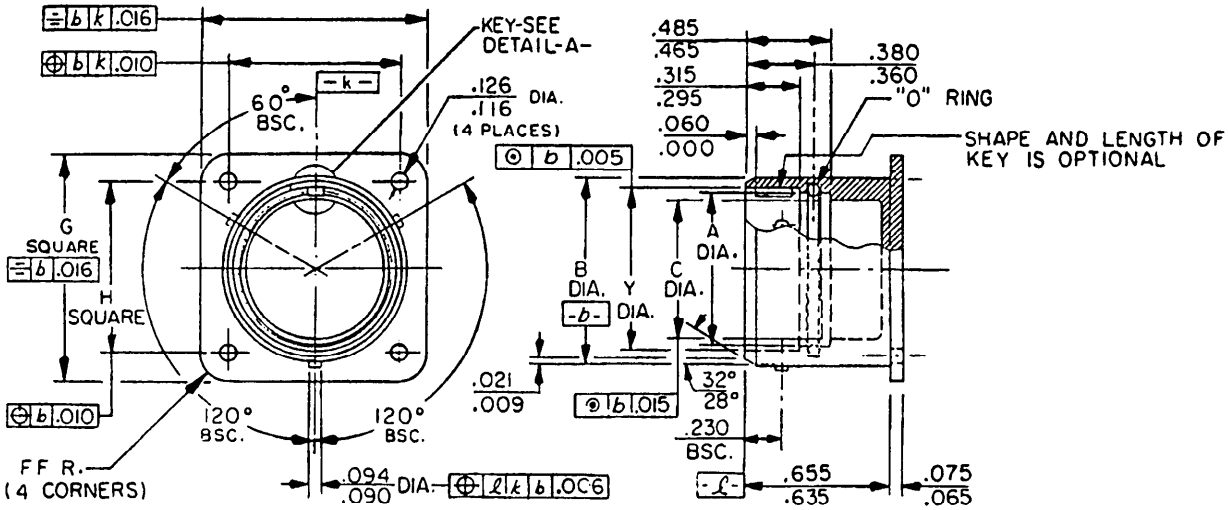





INCHES	MM	INCHES	MM	INCHES	MM
.003	.08	.060	1.52	.126	3.18
.005	.13	.065	1.65	.230	5.84
.006	.15	.067	1.70	.295	7.49
.009	.23	.073	1.85	.315	8.00
.010	.25	.075	1.91	.360	9.14
.015	.38	.085	2.16	.380	9.65
.016	.41	.090	2.29	.465	11.81
.021	.53	.094	2.39	.485	12.32
.025	.64	.095	2.41	.635	16.13
.031	.79	.116	2.95	.655	16.64

FSC 5935

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T05:34Z
Check the source to verify that this is the current version before use.

Part number	Shell size	A dia	B dia	C dia	G square	H square	Y dia	FF rad	Approx weight in lbs
M81511/19-08	8	.392 (9.96) .386 (9.80)	.553 (14.05) .547 (13.89)	.301 (7.65) .292 (7.42)	.820 (20.83) .804 (20.42)	.599 (15.21) .589 (14.96)	.465 (11.81) .455 (11.56)	.120 (3.05) .100 (2.54)	.0118
M81511/19-10	10	.517 (13.13) .511 (12.98)	.678 (17.22) .672 (17.07)	.426 (10.82) .417 (10.59)	.945 (24.00) .929 (23.60)	.724 (18.39) .714 (18.14)	.590 (14.99) .580 (14.73)	.120 (3.05) .100 (2.54)	.0148
M81511/19-14	14	.767 (19.48) .761 (19.33)	.928 (23.57) .922 (23.42)	.676 (17.17) .667 (16.94)	1.133 (28.78) 1.117 (28.37)	.911 (23.14) .901 (22.89)	.840 (21.34) .830 (21.08)	.120 (3.05) .100 (2.54)	.020
M81511/19-16	16	.893 (22.68) .887 (22.53)	1.054 (26.77) 1.048 (26.62)	.802 (20.37) .793 (20.14)	1.258 (31.95) 1.242 (31.55)	.974 (24.74) .964 (24.49)	.966 (24.54) .956 (24.28)	.150 (3.81) .130 (3.30)	.023
M81511/19-18	18	1.017 (25.83) 1.011 (25.68)	1.178 (29.92) 1.172 (29.77)	.926 (23.52) .917 (23.29)	1.351 (34.32) 1.335 (33.91)	1.067 (27.10) 1.057 (26.85)	1.090 (27.69) 1.080 (27.43)	.150 (3.81) .130 (3.30)	.025

NOTES:
1. Dimensions are in inches.
2. Millimeters are in parentheses.
3. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
4. Dimensions are after plating.
5. This connector mates with type MIL-C-81511/6 and /34 plug connectors.

FIGURE - Continued

REQUIREMENT:

Material:
Shell - Aluminum
Insert - Silicone rubber

Custodians:
Army - EL
Navy - AS
Air Force - 17

Review activities:
Army - MI, MU, AV, WC
Navy - SH, EC, OS
Air Force - 11, 85
DSA - ES

User activities:
Army - ME, AT
Navy - MC
Air Force -

Preparing activity:
Navy - AS

(Project 5935-1646-19)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T05:34Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 119-R004

INSTRUCTIONS

This sheet is to be filled out by personnel either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity *(as indicated on reverse hereof).*

SPECIFICATION

MIL-C-81511/19C CONNECTORS, ~~ELECTRICAL, CIRCULAR, HIGH DENSITY, QUICK DISCONNECT~~, ENVIRONMENT RESISTING; AND ACCESSORIES: RECEPTACLE, DUMMY ~~STOWAGE (SERIES 2)~~

ORGANIZATION *(Of submitter)*

CITY AND STATE

CONTRACT NO.	QUANTITY OF ITEMS PROCURED	DOLLAR AMOUNT

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES.

. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

. IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO IF "YES", IN WHAT WAY?

. REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED *(Printed or typed name and activity)*

DATE

DD FORM 1 NOV 64 1426 REPLACES NAVSHIPS FORM 4863, WHICH IS OBSOLETE C-8279

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T05:34Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE NAVY
Naval Air Engineering Center
Philadelphia, Pennsylvania 19112

POSTAGE AND FEES PAID
NAVY DEPARTMENT

OFFICIAL BUSINESS

Weapons Engineering Standardization Office (Code X)
Naval Air Engineering Center
Philadelphia, Pennsylvania 19112

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T05:34Z
Check the source to verify that this is the current version before use.