INCH-POUND


MIL-C-55302/182A
26 DEC 1989
SUPERSEDING
MIL-C-55302/182
15 April 1987


MILITARY SPECIFICATION SHEET

CONNECTORS, PRINTED CIRCUIT SUBASSEMBLY AND ACCESSORIES:
GUIDE PINS, JACKSCREWS AND MOUNTING EARS

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-C-55302.

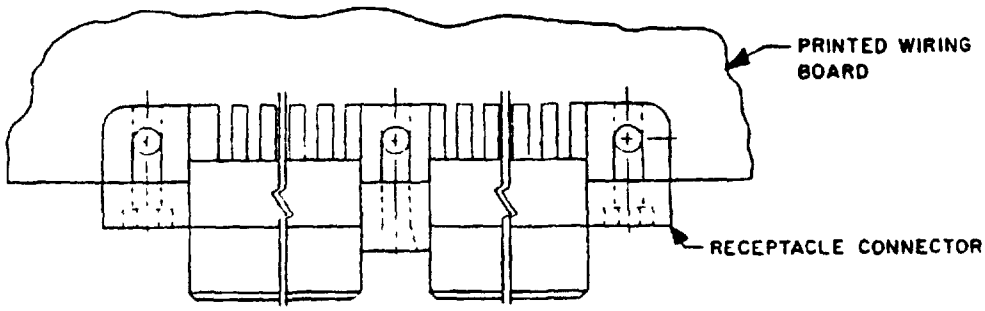

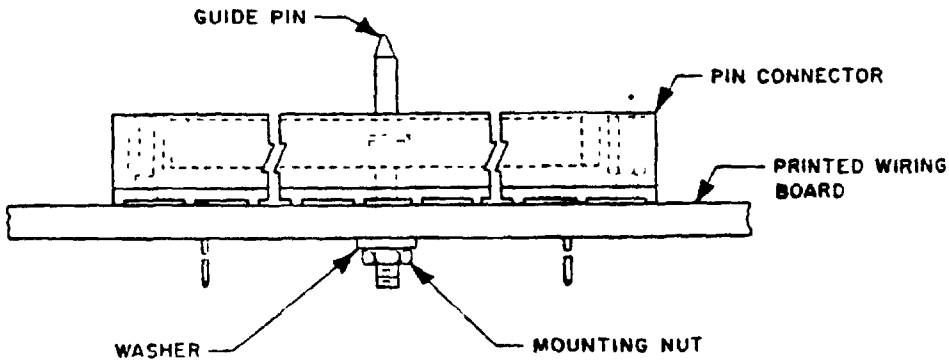


NOTE: See figures 2 and 3 for part numbers.

FIGURE 1. Installation of pin guide.

AMSC N/A FSC 5935

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.


Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:56Z
Check the source to verify that this is the current version before use.

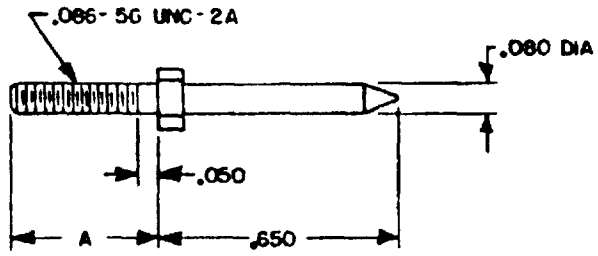

Inches	mm
.050	1.27
.080	2.03
.086	2.18
.650	16.51

NOTES.
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerance is ±.005 (0.13 mm).

FIGURE 2. Guide pin, M55302/182-01, -02, and -03.

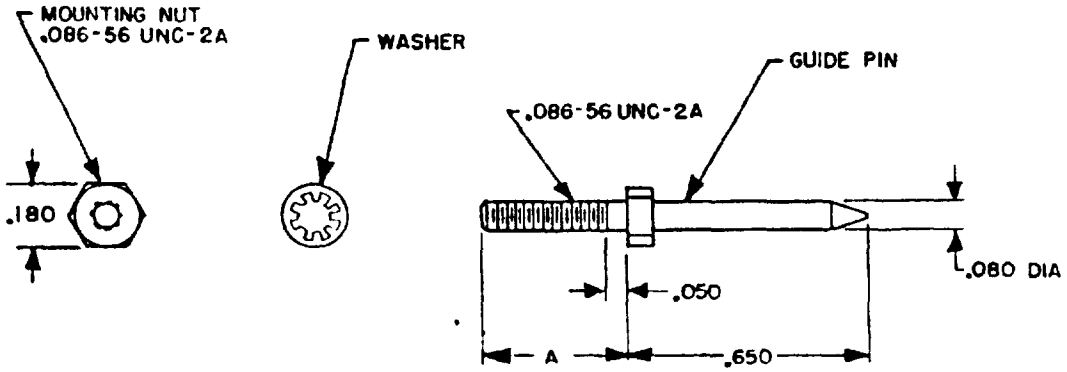

Guide pin number	A	Figure
M55302/182-01	.475	2
M55302/182-02	.562	2
M55302/182-03	.750	2
M55302/182-04	.475	3
M55302/182-05	.562	3
M55302/182-06	.750	3

Inches	mm
.050	1.27
.080	2.03
.086	2.18
.180	4.57
.475	12.06
.562	14.27
.650	16.51
.750	19.05

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerance is ±.005 (0.13 mm).

FIGURE 3 Guide pin kit, M55302/182-04, -05, and -06.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:56Z
Check the source to verify that this is the current version before use.

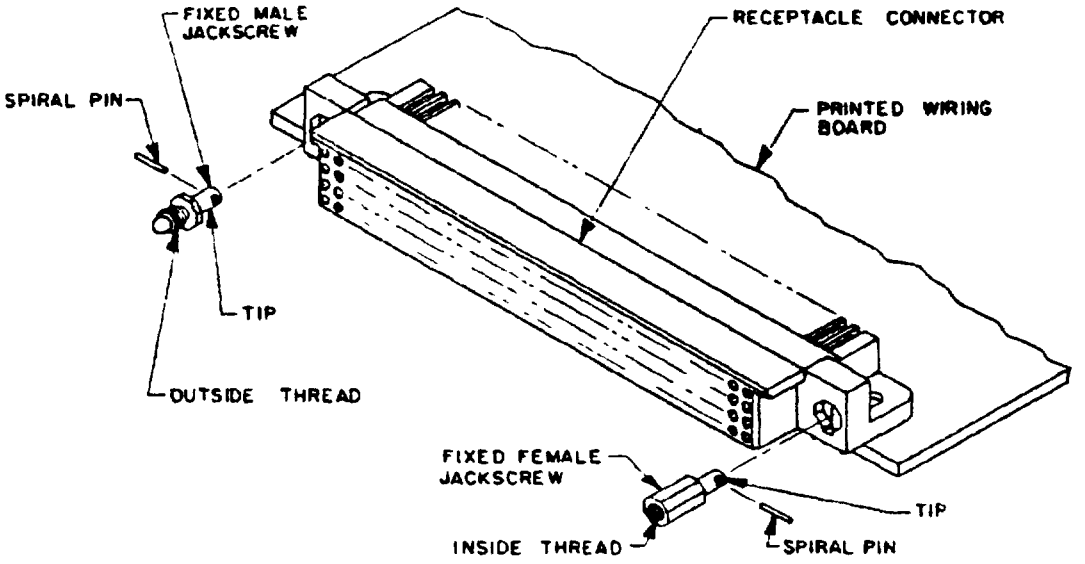


FIGURE 4. Installation of fixed jackscrews.

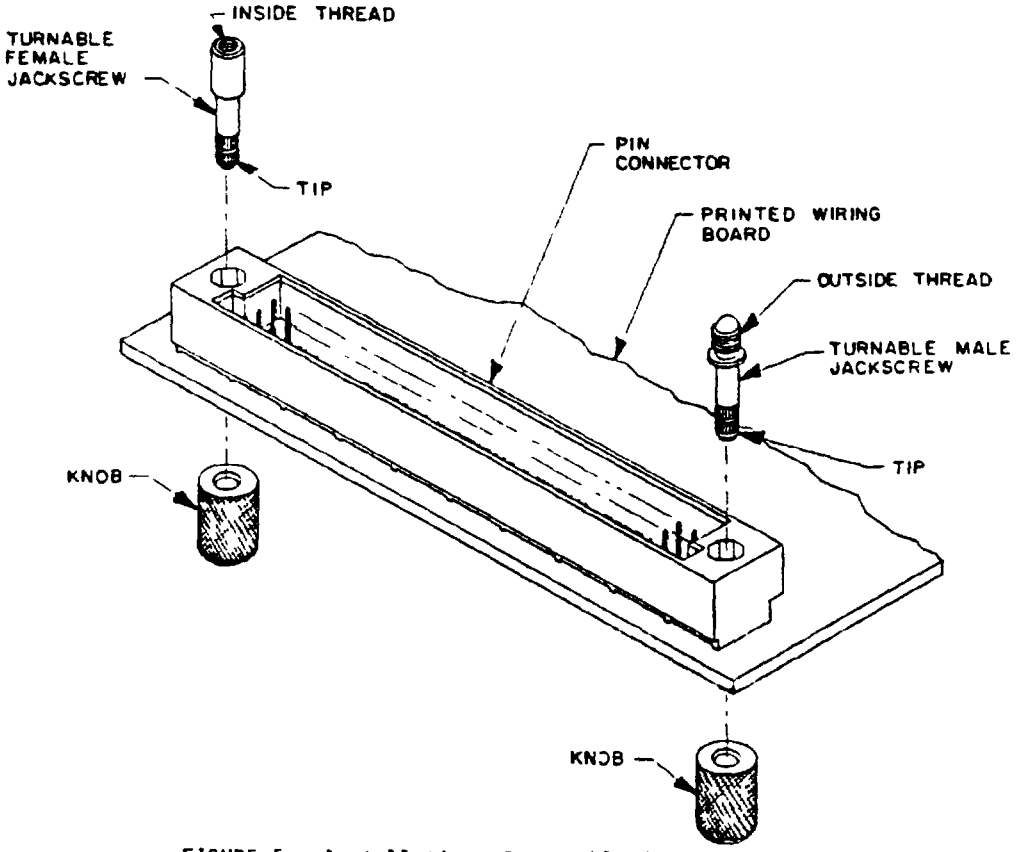


FIGURE 5. Installation of turnable jackscrews

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:56Z
Check the source to verify that this is the current version before use.

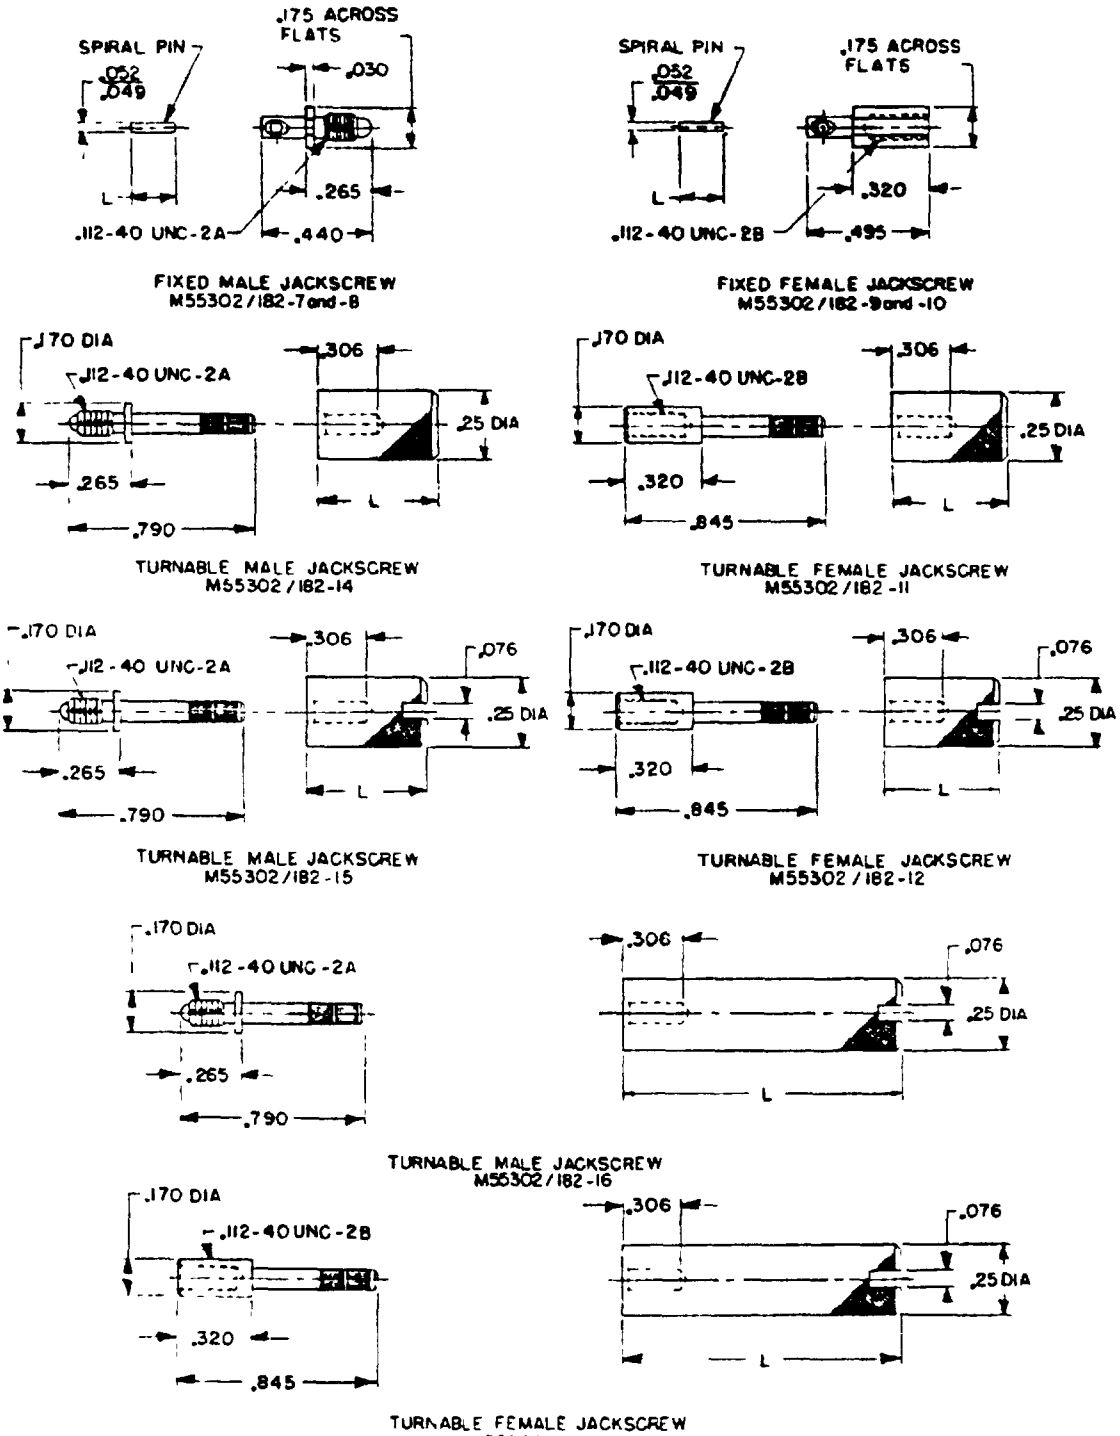


FIGURE 6. Jackscrews.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:56Z
Check the source to verify that this is the current version before use.

Type	Jackscrew part number	Style	L	Figure	Used in receptacle assembly	Mating pin assembly	Mating jackscrew		L	Figure
							Part number	Style		
VII	M55302/182-07	Fixed male	.187	4, 6	M55302/177	M55302/176	M55302/182-11	Turnable female	.50	5, 6
					M55302/180	M55302/179	M55302/182-12		.50	
							M55302/182-13		1.25	
VIII	M55302/182-08	Fixed male	140	4, 6	M55302/174	M55302/173	M55302/182-11	Turnable female	.50	5, 6
							M55302/182-12		.50	
							M55302/182-13		1.25	
IX	M55302/182-09	Fixed female	.187	4, 6	M55302/177	M55302/176	M55302/182-14	Turnable male	.50	5, 6
					M55302/180	M55302/179	M55302/182-15		.50	
							M55302/182-16		1.25	
X	M55302/182-09	Fixed female	140	4, 6	M55302/174	M55302/173	M55302/182-14	Turnable male	.50	5, 6
							M55302/182-15		.50	
							M55302/182-16		1.25	

Inches	mm	Inches	mm
.030	0.76	.265	6.73
.049	1.24	.306	7.77
.052	1.32	.320	8.13
076	1.93	.440	11.18
.112	2.84	.495	12.57
.140	3.56	.50	12.7
.170	4.32	.790	20.07
.175	4.44	.845	21.46
.187	4.75	1.25	31.8
.25	6.4		

NOTES
1. Dimensions are in inches
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerance is ± 005 (0.13 mm).

FIGURE 6. Jackscrews - Continued

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:56Z
Check the source to verify that this is the current version before use.


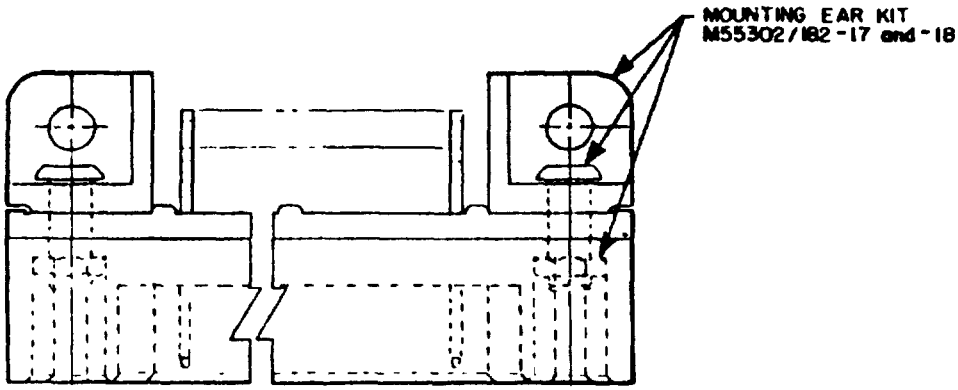


FIGURE 7. Installation of mounting ear for M55302/175, /178, and /181.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:56Z
Check the source to verify that this is the current version before use.

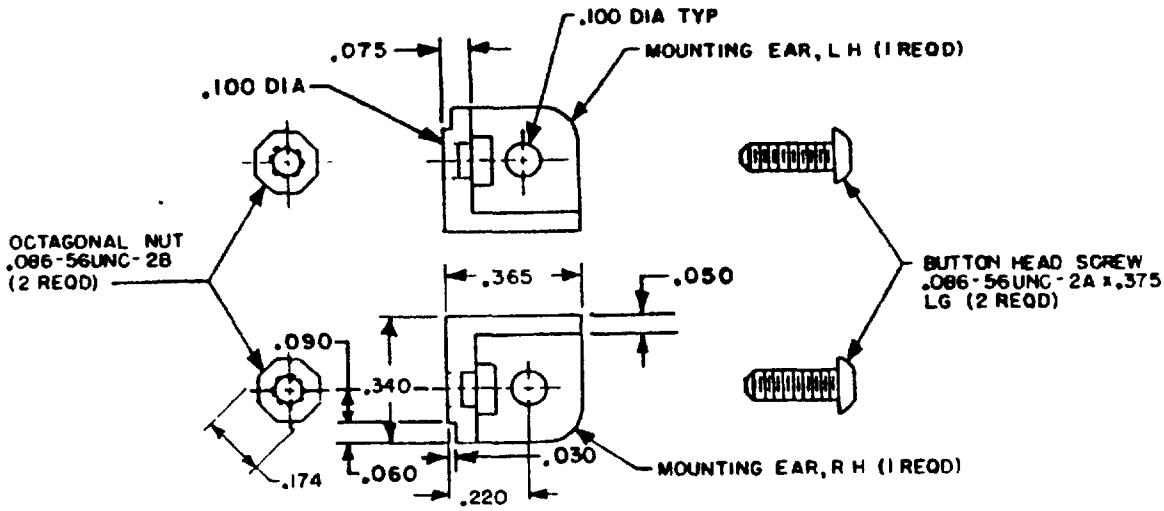


Inches	mm	Inches	mm
.030	0.76	.100	2.54
.050	1.27	.174	4.42
.060	1.52	.220	5.59
.075	1.90	.340	8.64
.086	2.18	.365	9.27
.090	2.29	.375	9.52

NOTES
1. Dimensions are in inches
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerance is ±.005 (0 13 mm).

FIGURE 8 Mounting ear kit for M55302/175.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:56Z
Check the source to verify that this is the current version before use.

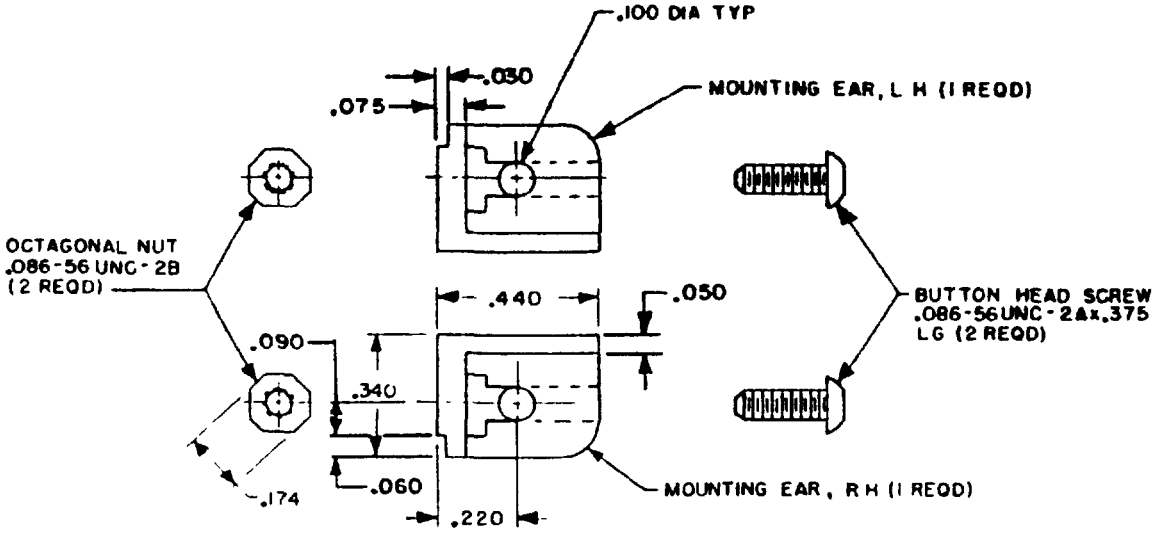

Type	Mounting ear kit	Figure
XI	M55302/182-17	7, 8,
XII	M55302/182-18	7, 9

Inches	mm	Inches	mm
.030	0.76	.100	2.54
.050	1.27	.174	4.42
.060	1.52	.220	5.59
.075	1.90	.340	8.64
.086	2.18	.375	9.52
.090	2.29	.440	11.18

NOTES.
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerance is ±.005 (0.13 mm).

FIGURE 9. Mounting ear kit for M55302/178 and M55302/181.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:56Z
Check the source to verify that this is the current version before use.

REQUIREMENTS.

Design and construction:

Design and configuration. See figures 1 through 9.

Material

Types I through III:

Guide pin. Stainless steel in accordance with ASTM A 582.

Types IV through VI:

Guide pin: Stainless steel in accordance with ASTM A 582.

Mounting nut: Stainless steel in accordance with ASTM A 582.

Internal tooth lock washer. Stainless steel in accordance with ASTM A 176.

Types VII through X

Knob. Stainless steel in accordance with ASTM A 582.

Turnable jackscrew Stainless steel in accordance with ASTM A 582.

Fixed jackscrew Stainless steel in accordance with ASTM A 582.

Spiral pin Stainless steel in accordance QQ-S-766.

Types XI and XII

Mounting ear. In accordance with MIL-C-55302.

Octagonal nut Stainless steel in accordance with ASTM A 582.

Button head screw Alloy steel in accordance with ASTM A 574

Finish.

Types I through III

Guide pin Passivate in accordance with QQ-P-35.

Types IV through VI.

Guide pin: Passivate in accordance with QQ-P-35.

Mounting nut: Passivate in accordance with QQ-P-35.

Internal tooth lock washer: Passivate in accordance with QQ-P-35.

Types VII through X

Knob Passivate in accordance with QQ-P-35.

Turnable jackscrew: Passivate in accordance with QQ-P-35.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:56Z
Check the source to verify that this is the current version before use.

Fixed jackscrew Passivate in accordance with QQ-P-35.

Spiral pin Passivate in accordance with QQ-P-35.

Types XI and XII

Octagonal nut. Passivate in accordance with QQ-P-35.

Button head screw: Black thermal oxide.

Application.

Types I through VI shall be used with connectors found in M55302/176 and /179.

Types VII and IX shall be used with connectors found in M55302/176, /177, /179, and /180.

Types VIII and X shall be used with connectors found in M55302/173 and /174

Type XI shall be used with connectors found in M55302/175.

Type XII shall be used with connectors found in M55302/178 and /181

Installation

Types I through VI See figure 1.

Types VII through X. See figures 4 and 5.

Types XI and XII. See figure 7

Revision letters are not used to denote changes due to the extensiveness of the changes

CONCLUDING MATERIAL

Custodians
Army - CR
Navy - EC
Air Force - 17

Review activities
Army - AR, MI
Navy - AS, SH
Air Force - 11, 85, 99
DLA - ES

User activities
Army - AT, AV, ME
Navy - MC
Air Force - 19

Preparing activity
Air Force - 17

Agent:
DLA - ES

(Project 5935-3741)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:56Z
Check the source to verify that this is the current version before use.