
MILITARY SPECIFICATION SHEET

CONNECTORS, PRINTED CIRCUIT SUBASSEMBLY AND ACCESSORIES: PLUG, 30 THRU 110 CONTACT POSITIONS, FOR PRINTED WIRING BOARDS (.100 SQ. GRID)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the connectors described herein shall consist of this document and the latest issue of Specification MIL-C-55302.

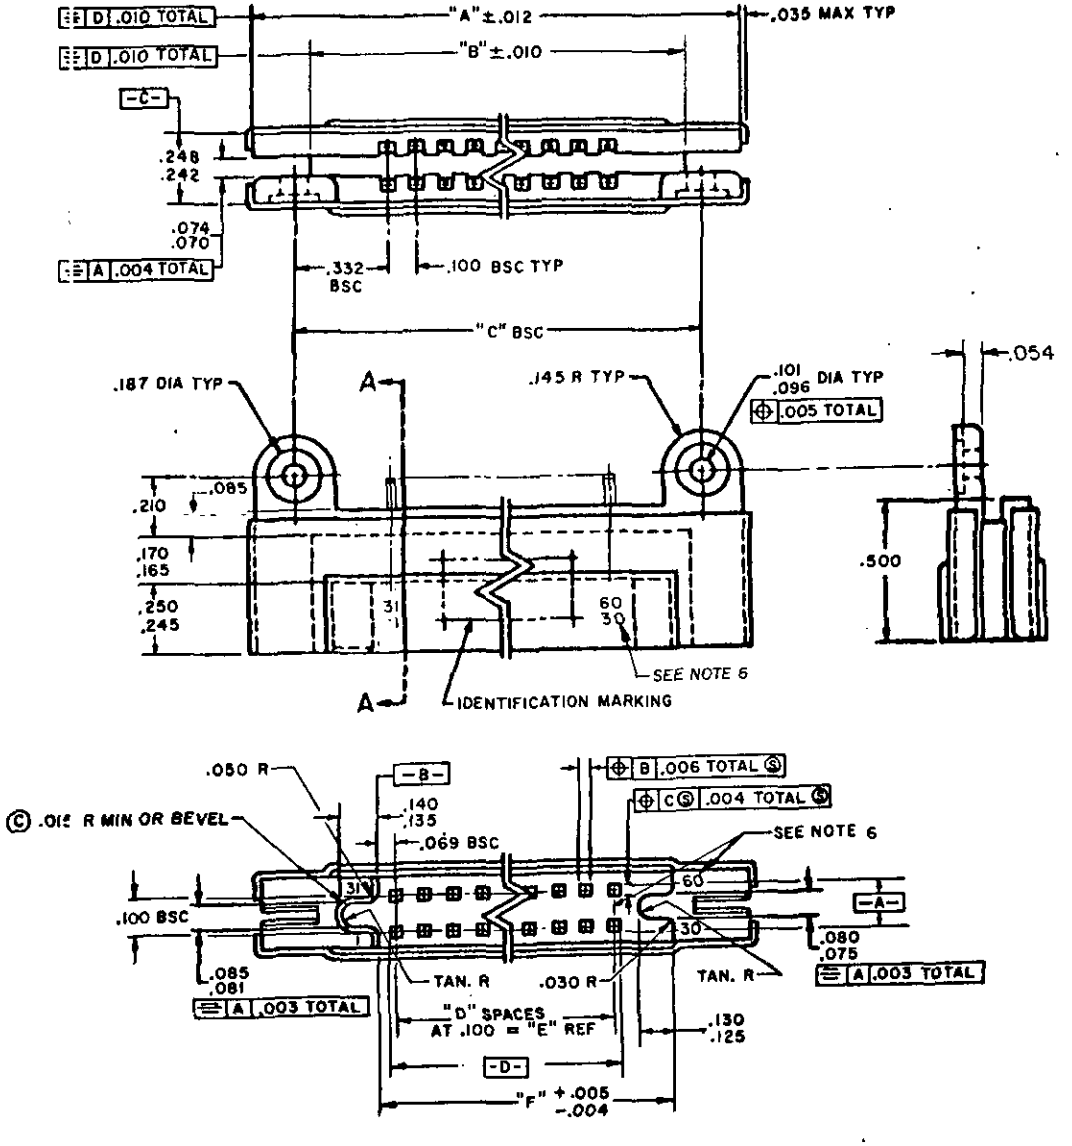

© STYLE 1 (INTERNAL KEYING)

FIGURE 1. Connectors, plug, (.100 square grid).

© denotes changes

FSC 5935


Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:45Z
Check the source to verify that this is the current version before use.

Dash number 1/	No. of contacts	Dimensions						Contact identification nos.
		A	B	C	D	E	F	
01	50	3.355 (85.22)	2.955 (75.06)	3.065 (77.85)	24	2.400 (60.96)	2.675 (67.95)	1 - 25 26 - 50
02	60	3.855 (97.92)	3.455 (87.76)	3.565 (90.55)	29	2.900 (73.66)	3.175 (80.65)	1 - 30 31 - 60
03	80	4.855 (123.32)	4.455 (113.16)	4.565 (115.95)	39	3.900 (99.06)	4.175 (106.05)	1 - 40 41 - 80
04	90	5.355 (136.02)	4.955 (125.86)	5.065 (128.65)	44	4.400 (111.76)	4.675 (118.75)	1 - 45 46 - 90
05	100	5.855 (148.72)	5.455 (138.56)	5.565 (141.35)	49	4.900 (124.46)	5.175 (131.45)	1 - 50 51 - 100
06	110	6.355 (161.42)	5.955 (151.26)	6.065 (154.05)	54	5.400 (137.16)	5.675 (144.15)	1 - 55 56 - 110
07	30	2.355 (59.82)	1.955 (49.66)	2.065 (52.45)	14	1.400 (35.56)	1.675 (42.55)	1 - 15 16 - 30
08	40	2.855 (72.52)	2.455 (62.36)	2.565 (65.15)	19	1.900 (48.26)	2.175 (55.25)	1 - 20 21 - 40
09	70	4.355 (110.62)	3.955 (100.46)	4.065 (103.25)	34	3.400 (86.36)	3.675 (93.35)	1 - 35 36 - 70

1/ Dash numbers 01 thru 09 are for style 1 (internal keying) connectors.

FIGURE 1. Connectors, plug, (.100 square grid) - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:45Z
Check the source to verify that this is the current version before use.

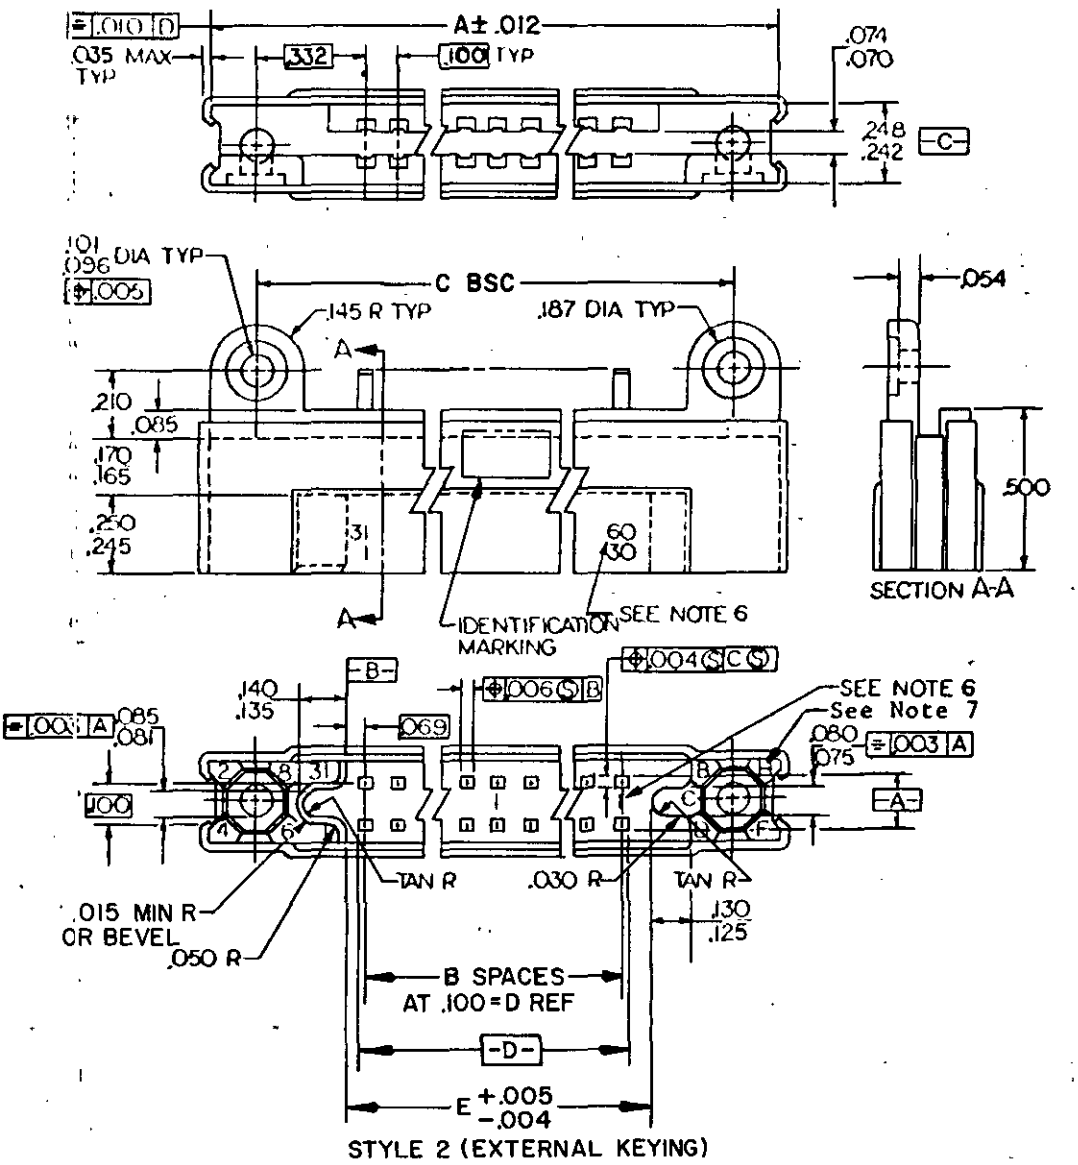

© FIGURE 1. Connectors, plug, (.100 square grid) - Continued.


Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:45Z
Check the source to verify that this is the current version before use.

1/ DASH NO.	NO. OF CONTACTS	DIMENSIONS					CONTACT IDENTIFICATION NUMBER
		A	B	D	C	E	
10	30	2.355 (59.82)	14	1.400 (35.56)	2.065 (52.45)	1.675 (42.55)	1-15 16-30
11	40	2.855 (72.52)	19	1.900 (48.26)	2.565 (65.15)	2.175 (55.25)	1-20 21-40
12	50	3.355 (85.22)	24	2.400 (60.96)	3.065 (77.85)	2.675 (67.95)	1-25 26-50
13	60	3.855 (97.92)	29	2.900 (73.66)	3.565 (90.55)	3.175 (80.65)	1-30 31-60
14	70	4.355 (110.62)	34	3.400 (86.36)	4.065 (103.25)	3.675 (93.35)	1-35 36-70
15	80	4.855 (123.32)	39	3.900 (99.06)	4.565 (111.95)	4.175 (106.05)	1-40 41-80
16	90	5.355 (136.02)	44	4.400 (111.76)	5.065 (128.65)	4.675 (118.75)	1-45 46-90
17	100	5.855 (148.72)	49	4.900 (124.46)	5.565 (141.35)	5.175 (131.45)	1-50 51-100
18	110	6.355 (161.42)	54	5.400 (137.16)	6.065 (154.05)	5.675 (144.15)	1-55 56-110
19	120	6.855 (174.18)	59	5.900 (149.86)	6.565 (166.75)	6.175 (156.85)	1-60 61-120
20	130	7.355 (186.82)	64	6.400 (162.56)	7.065 (179.45)	6.675 (169.55)	1-65 66-130
21	134	7.555 (191.90)	66	6.600 (167.64)	7.265 (184.53)	6.875 (174.63)	1-67 68-134
22	140	7.855 (199.52)	69	6.900 (175.26)	7.565 (192.15)	7.175 (182.25)	1-70 71-140


1/ Dash numbers 10 thru 22 are for style 2 (external keying) connectors.

© FIGURE 1. Connectors, plug, (.100 square grid) - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:45Z
Check the source to verify that this is the current version before use.

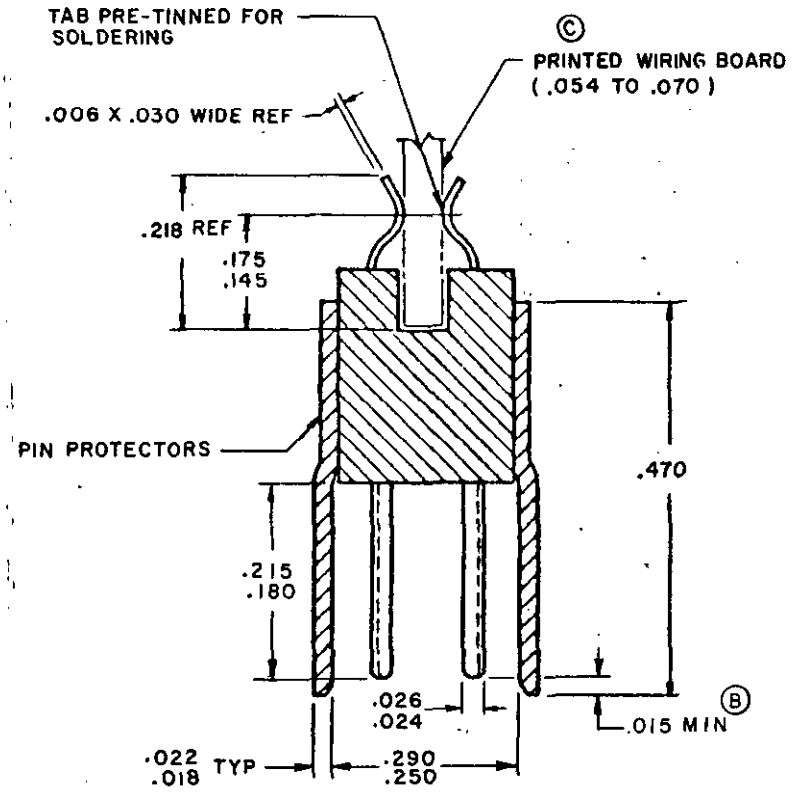

SECTION A-A

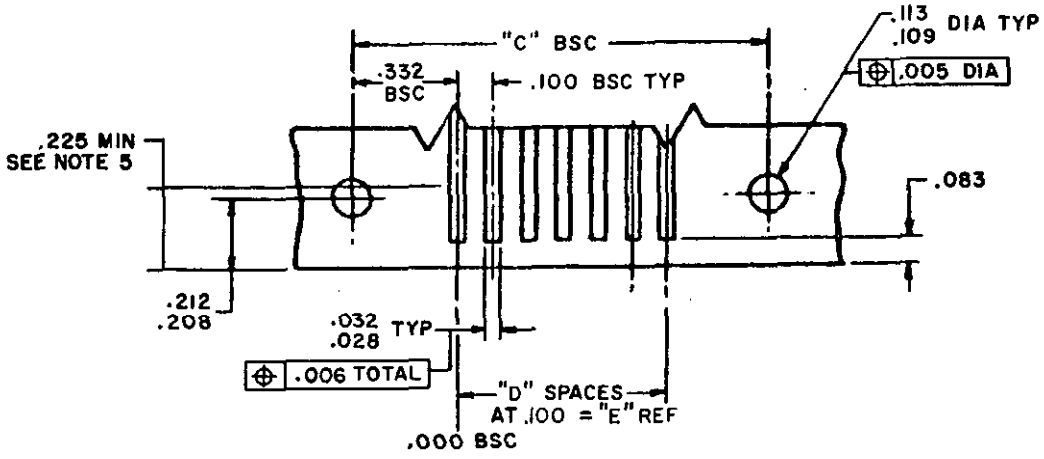

RECOMMENDED PRINTED WIRING BOARD LAYOUT

FIGURE 1. Connectors, plug, (.100 square grid) - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:45Z
Check the source to verify that this is the current version before use.

INCHES	MM	INCHES	MM
.003	.08	.101	2.57
.004	.10	.109	2.77
.005	.13	.113	2.87
.006	.15	.125	3.18
.008	.20	.130	3.30
.010	.25	.135	3.43
.012	.30	.140	3.56
.015	.38	.145	3.68
.018	.46	.165	4.19
.022	.56	.170	4.32
.024	.61	.175	4.44
.026	.66	.180	4.57
.028	.71	.187	4.75
.030	.76	.208	5.28
.032	.81	.210	5.33
.035	.89	.212	5.38
.050	1.27	.215	5.46
.054	1.37	.218	5.54
.069	1.75	.225	5.72
.070	1.78	.242	6.15
.074	1.88	.245	6.22
.075	1.90	.248	6.30
.080	2.03	.250	6.35
.081	2.06	.290	7.37
.083	2.11	.332	8.43
.085	2.16	.470	11.94
.096	2.44	.500	12.70
.100	2.54		

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
3. Unless otherwise specified, tolerance is ±.005 (.13 mm) on decimals and ±2° on angles.
4. These connectors mate with connectors specified in MIL-C-55302/27.
5. Minimum pad length on Printed Circuit board.
6. Numbers indicating every five cavities stamped on side. Numbers indicating end cavities and lines indicating every five cavities stamped on mating face.
7. Location indicators embossed on surface.

FIGURE 1. Connectors, plug, (.100 square grid) - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:45Z
Check the source to verify that this is the current version before use.

REQUIREMENTS

© Design and construction:

Dimensions and configuration: See figure 1.

Material:
Plating: The contact plating for the engagement area, .230 inches minimum length, shall be gold per MIL-G-45204, type II, grade C, class 1 over nickel per QQ-N-290, class 2, 30 to 150 microinches. The contact plating for the solder tail area, .160 inches minimum length, shall be tin lead per MIL-T-10727, type I, 100 microinches minimum over nickel per QQ-N-290, class 2, 30 to 150 microinches with a tin lead coat per MIL-T-10727, type II, composition SN60 or SN63 of QQ-S-571 for .080 inches minimum length. The termination end of the contact must meet method 208 of MIL-STD-202 with the exception that the solder dip temperature shall be 500° ±10°F.

Contact identification: See figure 1.

Coating: The aluminum pin protector shall be coated per MIL-A-8625, type 1 or epoxy coated .001 to .003 inches thick.

Contact rating: 3.0 amperes maximum per contact, 2.25 amperes continuous per connector at room ambient.

Keying: See MIL-C-55302/31.

Mating and unmating: The maximum mating force in pounds shall be the number of contacts multiplied by .25 and the withdrawal force in pounds shall be a minimum of .025 times the number of contacts and shall not exceed the measured insertion force.

Contact resistance: The average contact resistance of all contacts measured shall not exceed .015 ohm, and no individual contact pair shall have a resistance exceeding .020 ohm.

Contact retention: 3 pounds minimum.

Dielectric withstanding voltage:
Sea level: 900 volts rms.
High altitude: 200 volts rms.

Part number: M55302/26- (dash number from figure 1).

Patent number 3,404,367. The Government has a royalty free license under this patent for the benefit of manufacturers of the item either for the Government or for use in equipment to be delivered to the Government.

Custodians:
Army - CR
Navy - EC
Air Force - 17

Review activities:
Army - CR, AR, MI
Navy - SH, AS, OS
Air Force - 11, 99
DLA - ES

User activities:
Army - ME, AT, AV
Navy - MC
Air Force - 19

Preparing activity:
Army - CR

Agent:
DLA - ES

(Project 5935-3115-2)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:45Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS: This form is provided to solicit beneficial comments which may improve this document and enhance its use. DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity. A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed.
NOTE: This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

DOCUMENT IDENTIFIER (Number) AND TITLE

MIL-C-55302/26C

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

HQ, USA CORADCOM
ATTN: DRDCO-CM-DM
Fort Monmouth, NJ 07703

☐ VENDOR ☐ USER ☐ MANUFACTURER

1. ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID, RESTRICTIVE, LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW.

A. GIVE PARAGRAPH NUMBER AND WORDING

B. RECOMMENDED WORDING CHANGE

C. REASON FOR RECOMMENDED CHANGE(S)

2. REMARKS

SUBMITTED BY (Printed or typed name and address — Optional)

TELEPHONE NO.

DATE

DD FORM 1426 1 OCT 76

EDITION OF 1 JAN 72 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:45Z
Check the source to verify that this is the current version before use.

FOLD

HQ, USA CORADCOM
ATTN: DRDCO-CM-DM
Fort Monmouth, NJ 07703

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

POSTAGE AND FEES PAID



HQ, USA CORADCOM
ATTN: DRDCO-CM-DM
Fort Monmouth, NJ 07703

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:45Z
Check the source to verify that this is the current version before use.