INCH-POUND

MIL-P-80114D
2 August 1990
SUPERSEDING
MIL-P-80114C
8 December 1983

MILITARY SPECIFICATION

PRESSES, HYDRAULIC, VERTICAL, C- (GAP) FRAME

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers hydraulic powered presses with a C-(Gap) type frame and vertically operating ram with equipment and accessories specified herein.

1.2 Classification. The press shall be of the following types and sizes. The type and size to be furnished shall be as specified (see 3.9 and 6.2).

Type I - Bench Mounting

Size 2 - 2 ton capacity	Size 8 - 8 ton capacity
Size 4 - 4 ton capacity	Size 10 - 10 ton capacity
Size 6 - 6 ton capacity	Size 12 - 12 ton capacity

Type II - Floor Mounting

Size 15 - 15 ton capacity	Size 40 - 40 ton capacity
Size 20 - 20 ton capacity	Size 50 - 50 ton capacity
Size 25 - 25 ton capacity	Size 75 - 75 ton capacity
Size 30 - 30 ton capacity	Size 100 - 100 ton capacity
Size 35 - 35 ton capacity	Size 150 - 150 ton capacity

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Defense Industrial Plant Equipment Center, ATTN: DIPEC-SSG, 2163 Airways Blvd. Memphis, Tennessee 38114-5051, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 3442
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T04:39Z
Check the source to verify that this is the current version before use.

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation (see 6.2).

SPECIFICATIONS

MILITARY

MIL-M-18058 - Machinery, Metal and Woodworking, Packaging of.

STANDARDS

FEDERAL

FED-STD-H28 - Screw Thread Standards for Federal Services.

MILITARY

MIL-STD-461 - Electromagnetic Emission and Susceptibility Requirements for the Control of Electromagnetic Interference.

MIL-STD-462 - Electromagnetic Interference Characteristics, Measurement of.

(Unless otherwise indicated copies of Federal and military specifications, standards, and handbooks are available from the Naval Publications and Forms Center, (ATTN: NPODS) 5801 Tabor Avenue, Philadelphia, PA 19120-5099).

2.1.2 Other Government documents, drawings, and publications. The following other Government documents, drawings, and publications form a part of this document to the extent specified herein. Unless otherwise specified, the issues are those cited in the solicitation.

CODE OF FEDERAL REGULATIONS (CFR)

U.S. DEPARTMENT OF LABOR, OCCUPATIONAL SAFETY AND HEALTH ADMINISTRATION (OSHA)

29 CFR 1910 - Occupational Safety and Health Standards.

(Application for copies should be addressed to the Superintendent of Documents, U. S. Government Printing Office, Washington, DC 20402-0001).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T04:39Z
Check the source to verify that this is the current version before use.

(Copies of specifications, standards, handbooks, drawings, publications, and other Government documents required by contractors in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contract activity).

2.2 Non-Government publications. The following documents form a part of this document to the extent specified herein. Unless otherwise specified, the issues of the documents which are DOD adopted are those listed in the issue of the DODISS cited in the solicitation. Unless otherwise specified, the issues of documents not listed in the DODISS are the issues of the documents cited in the solicitation (see 6.2).

AMERICAN NATIONAL STANDARDS INSTITUTE (ANSI)

ANSI B5.1 - T-Slots, Their Bolts, Nuts, Tongues and Cutters (DOD adopted).

ANSI B11.2 - Hydraulic Presses - Safety Requirements for the Construction, Care, and Use (000 adopted).

(Application for copies should be addressed to the American National Standards Institute, ATTN: Sales Dept., 1430 Broadway, New York, NY 10018-3363) .

NATIONAL FLUID POWER ASSOCIATION (NFPA)

NFPA T2.24.1 - Hydraulic Fluid Power - Systems Standard for Stationary Industrial Machinery.

(Application for copies should be addressed to the National Fluid Power Association, Incorporated, 3333 N. Mayfair Road, Milwaukee, WI 53222-3291).

NATIONAL ELECTRICAL MANUFACTURERS' ASSOCIATION (NEMA)

NEMA ICS 6 - Enclosures for Industrial Controls and Systems (DOD adopted).

NEMA MG 1 - Motors and Generators (DOD adopted).

(Application for copies should be addressed to the National Electrical Manufacturers' Association, 2101 L Street, N.W., Washington, DC 20037-1580).

NATIONAL FIRE PROTECTION ASSOCIATION (NFPA)

NFPA 79 - Electrical Standard for Industrial Machinery (DOD adopted).

(Application for copies should be addressed to the National Fire Protection Association, Batterymarch Park, Quincy, MA 02269-9101).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T04:39Z
Check the source to verify that this is the current version before use.

(Non-Government standards and other publications are normal ly available from the organizations that prepare or distribute the documents. These documents also may be available in or through libraries or other informational services).

2.3 Order of precedence. In the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 First article. When specified (see 6.2), one complete press shall be subjected to first article inspection (see 6.4) in accordance with 4.4.

3.2 Design. The press shall be new (not a prototype) and one of the manufacturer s current production models capable of operations in accordance with the requirements herein. The press shall include all components, parts, and features necessary to meet the performance requirements specified herein. All parts subject to wear, breakage, or distortion shall be readily accessible for adjustment, replacement, or repair.

3.2.1 Measuring and indicating device calibration. Measuring and indi-eating devices shall be graduated in Inch-pound (see 6.5.1), ‘metric (see 6.5.2), or dual (inch-pound and metric) units as specified by the procuring activity (see 6.2). Regardless of the measurement system used, all measuring and indicating devices on the machine shall be graduated in the same system.

3.2.2 Reclaimed materials. The press may contain reclaimed materials to the maximum extent possible provided such materials will not jeopardize the intended use, performance, or design life of the press. Reclaimed materials shall have been collected or recovered from solid waste and reprocessed to become a source of raw materials, as opposed to virgin raw materials. None of the above shall be interpreted to mean that the use of used, rebuilt, or remanufactured end products are allowed under this specification.

3.2.3 Energy efficiency. The press and its components that directly consume energy in normal operation shall be designed and constructed for energy efficiency in accordance with the developments available within the industry.

3.2.4 Safety and health requirements. All parts, components, mechanisms, and assembles furnished on the press, whether or not specifically required herein, shall conform with all requirements of 29 CFR 1910 and ANSI B11.2. If a conflict arises between 29 CFR 1910 and 811.2, 29 CFR 1910 shall apply. Additional safety and health requirements shall be as specified in detail (see 6.2). Covers, guards, or other safety devices normally furnished as standard on the manufacturer’s commercial press supplied to the commercial market shall be provided for the point of operation and all other parts of the press that present safety hazards. Additional guarding dependent on workpiece size and configuration shall be provided when specified and fully described by the procuring activity (see 6.2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T04:39Z
Check the source to verify that this is the current version before use.

3.2.5 Mercury restriction. The press shall not contain mercury or mercury compounds nor be exposed to free mercury during manufacture.

3.2.6 Asbestos restriction. Asbestos and materials containing asbestos shall not be used on or in the press.

3.2.7 Environmental protection. During the manufacture, operation, service, transportation, or storage of the press, and its components materials hazardous to the ecological system as prohibited by Federal, state, or local statutes in effect on the date of the contract shall not be used or emitted.

3.2.8 Lubrication. Means shall be provided to ensure lubrication for all moving parts, unless such parts are not of the permanently lubricated type. Each lubricant reservoir shall have means for determining fluid level. All oil holes, grease fittings, and filler caps shall be accessible.

3.2.9 Interchangeability. To provide for replacement of worn parts, all parts shall be manufactured to definite dimensions and tolerances that will permit installation of replacement parts without modification of the part or machine. All replacement parts shall be interchangeable with their respective original parts, and fit/function with mating components.

3.3 Construction. The press shall be constructed of parts which are new, without defects, and free of repairs. The structure shall withstand all forces encountered during operation of the press to its maximum rating and capacity without permanent distortion, or failure.

3.3.1 Castings and forgings. All castings and forgings shall be free of defects, scale, and mismatching. No processes such as welding, peening, plugging, or filling with solder or paste shall be used for reclaiming any defective part. Such processes may be used only for enhancing surface finish and appearance.

3.3.2 Fastening devices. All fasteners shall be installed to prevent change of tightness. Fastening devices subject to removal or adjustment shall not be permanently installed.

3.3.3 Surfaces. All surfaces shall be clean and free of harmful or extraneous materials. All edges shall be either rounded or beveled unless sharpness is required to perform a necessary function. Except as otherwise specified herein, the condition and finish of all surfaces shall be in accordance with the manufacturer’s commercial practice.

3.3.4 Welding, brazing, or soldering. Welding, brazing, or soldering shall be employed only where specified in the original design. None of these operations shall be employed as a repair measure for any defective part.

3.3.5 Painting. Unless otherwise specified (see 6.2), the press shall be painted in accordance with the manufacturer’s commercial practice and color.

3.3.6 Threads. All threaded parts used on the press and its related attachments and accessories shall conform to FED-STD-H28 and the applicable “Detailed Standard” section referenced therein.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T04:39Z
Check the source to verify that this is the current version before use.

3.3.7 Electromagnetic interference control. When specified (see 6.2), equipment furnished under this specification shall comply with MIL-STD-461. The equipment and subsystems class and the emission and susceptibility requirements shall be as specified.

3.4 Components. The press shall consist basically of the following components. Any additional components necessary for the operation of the machine shall be furnished in accordance with the manufacturer's standard practice.

3.4.1 Frame. The frame shall be of cast iron, cast steel, or a fabricated steel weldment. The frame shall be of the mass, weight, and rigidity to withstand stresses produced when operating the press at its maximum rated capacity. The frame shall be of the "C" type configuration with the strength and rigidity necessary to meet performance and alignment tolerances required herein. The bed surface area (bolster mounting surface) shall be flat within 0.002 inch per foot. The frame shall be provided with lifting eyes arranged with the vertical center of gravity for safe lifting and installing of the press. The lifting eyes shall provide a stable and balanced lift with a load safety factor or at least five times the total weight of the press. The base of the frame shall have means for securing the press to a foundation or table.

3.4.2 Bolster late. A means shall be provided for securing the bolster plate to the press bed. Unless otherwise specified (see 6.2), the press bed shall have holes or T-slots conforming to ANSI B5.1 for attaching the lower die or die shoe.

3.4.3 Ram. The ram shall be mounted on the press frame in a position that is perpendicular to the table surface within 0.005 inch per foot of ram travel. A guide shall be provided to minimize deflection of the ram during operation.

3.4.3.1 Upper tool holder. Unless otherwise specified (see 6.2), the press shall be provided with an upper tool holder. The tool holder shall be attached to the ram. The tool holder shall be furnished with holes or T-slots for mounting tooling or die plates. The holes or T-slots shall be in accordance with ANSI B5.1.

3.4.4 Hydraulic system. The hydraulic system shall conform to or exceed **the requirements of NFPA T2.24.1.** The hydraulic system shall be complete including pumps, valves, piping, hydraulic cylinders, and controls. Overload pressure protection shall be provided. A filter system shall be provided to ensure delivery of clean fluid. The hydraulic reservoir shall have a means for determining fluid level, provisions for draining, and a cleanout access plate. A means shall be provided to minimize shock loads caused by breakthrough.

3.4.4.1 Hydraulic cylinder. The cylinder shall be provided with a means to prevent the piston from stroking beyond its design limit. The cylinder piston shall remain perpendicular to the bolster surface to within 0.005 inch per foot at any point in the piston stroke. A means shall be provided on the piston end for attaching the upper tool holder. The cylinder piston shall be provided with a means to prevent rotation.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T04:39Z
Check the source to verify that this is the current version before use.

3.4.5 Force indicating device. A force indicating device shall be provided to indicate tons of ram force. The indicating device may read in tons of ram force or pounds per square inch (psi). When-the indicating device is calibrated in psi, a plate converting psi to tons of ram force shall be provided. The plate shall conform to 3.14.

3.4.6 Electrical requirements. The press shall be wired to conform to NFPA 79. Each machine shall be wired to draw all of its electrical power from a single circuit. Unless otherwise specified (see 6.2), the press shall be designed to operate on 3-phase, 60-Hertz (Hz), 230/460-volts. Conversion from one voltage to the other shall be accomplished by the reconnection of existing components. The press shall be initially wired as specified (see 6.2) .

3.4.6.1 Motors. Motors shall be rated for continuous duty and shall have ball or roller bearings of the sealed and permanently lubricated type. Unless otherwise specified (see 6.2), each motor shall have a dripproof enclosure. The motors shall conform to NEMA MG1 standards.

3.5 Controls. All controls shall be enclosed in an enclosure conforming to NEMA ICS 6, type 12. The controls shall provide for control of all components and functions of the press. All controls and indicating devices shall be mounted and located within sight and reach of the operator at the normal operating station. Each control and indicator shall be clearly and legibly marked for function and identification.

3.5.1 Programmable controller. When specified (see 6.2), the press shall be furnished with a programmable controller. The controller shall control all functions of the press.

3.6 Worklight. When specified (see 6.2), a worklight shall be provided. The light shall have a protective shield, an on-off switch, and shall be adjustable to reflect maximum light on the work area. If a built in lighting system is provided, the adjustable light described above shall not be required.

3.7 Hour meter. When specified (see 6.2), the press shall be equipped with an hour meter, The hour meter shall be installed to display accumulated operating time of the main drive motor. The meter shall be of the nonresetting type and shall have a range of 0 to 9,999 hours in increments of not greater than 1 hour. The meter shall be sealed to prevent the entrance of dust-and moisture and shall be mounted to withstand shock and vibration generated by the press.

3.8 Size and capacity. Unless otherwise specified (see 6.2), the size and capacity of the press shall meet the requirements of tables I and II for the type and size machine specified.

3.8.1 Physical size limitations. When specified (see 6.2), physical size of the machine shall be limited to the height, width, and length restrictions specified by the procuring activity to ensure the machine will fit in its future operating location.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T04:39Z
Check the source to verify that this is the current version before use.

TABLE I. Type I, sizes and capacities.

Sizes	2	4	6	8	10	12
Capacity, tons	2	4	6	8	10	12
Daylight, inches (Table to ram, ram fully up)	12	12	16	16	18	18
Ram stroke, inches	6	12	12	12	12	12
Throat, inches (Centerline of ram to frame)	6	6	7	7	7	7
Bed size, inches (Left - right)	18	18	18	21	21	21
(Front - back)	12	12	12	14	14	14

NOTE: For sizes 2 thru 10, the stated requirements for the press size specified in 6.2 shall not be greater than the sizes and capacities for the next larger size press shown in table I. When a size 12 is specified, it shall not exceed the stated requirements by more than 10 percent.

3.9 Alignment tolerances. Each press shall meet the alignment tolerances specified in 3.4.1 and 3.4.5.

3.10 Performance. Each press shall be capable of exerting a force of not less than 110 percent of its rated tonnage at any point of the ram stroke and shall also be capable of pressing or holding this force for not less than three minutes.

3.10.1 Additional performance requirements. Performance features required in addition to, or in lieu of, he requirements herein shall be as specified and fully described (see 6.2).

3.11 Standard equipment. All standard equipment normally provided with the manufacturer's commercial press shall be furnished.

3.12 Optional equipment. Optional equipment shall be furnished as specified and fully described (see 6.2). The optional equipment provided shall be functional without requiring modification of the equipment or machine.

3.13 Repair parts. Required repair parts shall be furnished as specified (see 6.2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T04:39Z
Check the source to verify that this is the current version before use.

TABLE II. Type II, sizes and capacities.

Sizes	15	20	25	30	35	40	50	75	100	150
Capacity, tons	15	20	25	30	35	40	50	75	100	150
Daylight, inches (table to ram, ram fully up)	18	20	22	24	24	24	18	18	20	22
Ram stroke, inches	12	12	12	15	15	15	10	10	10	10
Throat, inches (ram centerline to frame)	10	10	10	12	12	12	10	10	10	13
Bed size, inches (Left to right)	24	24	24	25	25	25	26	28	29	34
(Front to back)	15	15	15	16	16	16	16	18	21	24

NOTE: For sizes 15 thru 100, the stated requirements for the press size specified in 6.2 shall not be greater than the sizes and capacities for the next larger size press shown in table II. When a size 150 is specified, it shall not exceed the stated requirements by more than 10 percent.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T04:39Z
Check the source to verify that this is the current version before use.

3.14 Marking on instruments, control panels, charts, and plates. All words on the machine including all Instruments, control panels, control units, charts, plates, and related attachments shall be in the English language. Characters shall be permanently marked in boldface on a contrasting background. All plates shall be corrosion resistant.

3.14.1 Lubrication plate or chart. When specified (see 6.2), a lubrication plate or chart shall be attached to each press. If a chart is furnished, it shall be placed in a transparent plastic folder, or permanently sealed between clear plastic sheets. Unless otherwise specified (see 6.2), the information provided on the chart or plate shall be as listed below:

Points of lubricant application
Type of lubricant
Servicing interval
Military or Federal specification for each lubricant, (if applicable)

3.14.2 Nameplate. A nameplate shall be securely attached to each press. Unless otherwise specified (see 6.2), the nameplate shall contain the information listed below:

Nomenclature
Manufacturer's name
Manufacturer's model designation
Manufacturer's serial number
Power input (volts, total amps, phase, frequency)
Amp rating of largest motor
Short circuit/over-current protection rating
Contract number or order number
National stock number or plant equipment code
Date of manufacture

3.14.3 Hydraulic fluid requirements plate. When specified (see 6.2), a hydraulic fluid requirements plate shall be attached to the machine at the hydraulic reservoir fill point. Unless otherwise specified (see 6.2), the plate shall contain the following information:

Type of fluid (SAE number or military or Federal specification number)
Type of filter

3.15 Workmanshi Workmanship of the press and its accessories shall meet all requirements specified herein.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements (examinations and tests) as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T04:39Z
Check the source to verify that this is the current version before use.

disapproved by the Government. The Government reserves the right to perform any inspections set forth in the specification where such inspections are deemed necessary to ensure supplies and services conform to prescribed requirements.

4.1.1 Responsibility for compliance. All items shall meet all requirements of sections 3 and 5. The inspections set forth in this specification shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of ensuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling inspection, as part of manufacturing operations, is an acceptable practice to ascertain conformance to requirements, however, this does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to accept defective material.

4.2 Classification of inspections. The inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.4).

b. Quality conformance inspection (see 4.5).

4.3 Inspection conditions. Unless otherwise specified (see 6.2), all inspections shall be performed in accordance with the test conditions specified in 4.7.1.

4.4 First article inspection. When a first article inspection is required, it shall be applied to the first article submitted in accordance with 3.1. Unless otherwise specified (see 6.2), first article inspection shall consist of the examination in 4.6 and all tests in 4.7. The press shall pass the examination and all tests to be accepted.

4.5 Quality conformance inspection. Quality conformance inspection shall be applied to each press prior to being offered for acceptance under the contract. Unless otherwise specified (see 6.2), quality conformance inspection shall consist of the examination in 4.6, the tests in 4.7.3, and the-inspection in 4.8. The machine shall pass the examination, all tests, and the inspection to be accepted.

4.6 Examination. Each press shall be examined to determine compliance with all requirements of this specification.

4.7 Tests.

4.7.1 Test conditions. All tests shall be performed in an indoor facility with ambient conditions of 410 to 1040 Fahrenheit (F) and 20 to 95 percent relative humidity.

4.7.2 Operational test. Each press shall be operated at no load for not less than one-half hour. Proper operation of all controls, motors, adjusting mechanisms, and accessories shall be verified during the trial period.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T04:39Z
Check the source to verify that this is the current version before use.

4.7.3 Performance tests. The press shall be tested with devices which measure and indicate the ram speeds and maximum tonnage, to assure conformance to the requirements of Section 3. The press shall be tested at 100 percent of rated tonnage at different points of ram stroke and the hydraulic system shall hold its rated tonnage for 3 minutes. All controls shall be tested for proper operation. The press shall be operated under conditions of continuous production at maximum speeds and pressure. The hydraulic fluid shall stabilize at a temperature of 1300 Fahrenheit or less, Following these tests, the press shall be visually examined, without dismantling, for damage to components, adjustment, alignment, and fluid leaks. All performance tests shall be completed without making any adjustments to or performing any maintenance on the machine.

4.7.4 Alignment tolerance test. Each press shall be tested to determine compliance with the alignment tolerance requirements of 3.4.5. The alignment tolerance test shall be-performed prior to and subsequent to the performance test given in 4.7.3. Any machine adjustments required to comply with 3.5 during or after the performance test shall be cause for rejection.

4.7.4.1 Additional performance tests. Performance tests required in addition to, or in lieu of, he requirements of 4.7.3 shall be as specified and fully described (see 6.2).

4.7.5 Electromagnetic interference control test. Equipment requiring electromagnetic Interference control shall be tested for compliance with 3.3.7 using the procedures given in MIL-STD-462.

4.8 Packaging inspection. Packaging of each item shall be inspected to determine compliance with the requirements of section 5.

5. PACKAGING

5.1 Packaging requirements. The requirements for packaging shall be in accordance with MIL-M-18058.

6. NOTES

6.1 Intended use. Presses specified herein are intended for blanking, trimming, piercing, drawing and shallow forming.

6.2 Acquisition requirements. Acquisition documents should specify the following:

a. Title, number, and date of this specification.

b. Type and size required (see 1.2).

c. Issue of DODISS to be cited in the solicitation and if required, the specific issue of individual documents referenced (see 2.1.1 and 2.2).

d. First article, if required (see 3.1).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T04:39Z
Check the source to verify that this is the current version before use.

e. Specify system of units for measuring and indicating devices (see 3.2.1).

f. Additional safety and health requirements, if required (see 3.2.4).

g. Specify configuration of additional point-of-operation guarding, if required (see 3.2.4).

h. Painting, if different (see 3.3.5).

i. If electromagnetic interference control is required, specify the equipment and subsystem class and the emission and susceptibility required (see 3.3.7).

j. Bolster plate, if required (see 3.4.2).

k. Upper tool holder, if required (see 3.4.3.1).

1. Electrical requirements, if different (see 3.4.6).

m. Voltage requirements, if different (see 3.4.6).

n. Motors, if different (see 3.4.6.1).

0. Programmable controls, if required (see 3.5.1).

p. Worklight, if required (see 3.6).

q. Hour meter, if required (see 3.7).

r. Size and capacity, if different (see 3.8).

s. Specify physical size limitation, if required (see 3.8.1).

t. Additional performance features, if required (see 3.10.1).

u. Specify and fully describe optional equipment, if required (see 3.12).

v. Specify applicable repair parts, if required (see 3.13).

w. Lubrication plate, if required (see 3.14.1).

x. Specify information to be provided on lubrication plate, if different (see 3.14.1).

y. Nameplate, if different (see 3.14.2).

z. Hydraulic fluid requirements plate, if different (see 3.14.3).

aa. Plate information, if different (see 3.14.3).

bb. Inspection conditions, if different (see 4.3).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T04:39Z
Check the source to verify that this is the current version before use.

cc. First article inspection, if different (4.4).

dd. Quality conformance inspection, if different (see 4.5).

ee. Additional performance tests, if required (see 4.7.4.1).

ff. Electromagnetic interference control test, if required (see 3.3.7 and 4.7.5).

6.3 Consideration of data requirements. The following data requirements should be considered when this specification is applied on a contract. The applicable Data Item Descriptions (DIDs) should be reviewed in conjunction with the specific acquisition to ensure that only essential data are requested/provided and that the DIDs are tailored to reflect the requirements of the specification acquisition. To ensure correct contractual application of the data requirements, a Contract Data Requirements List (DD Form 1423) must be prepared to obtain the data, except where DOD FAR Supplement 27.475-1 exempts the requirement for a DD Form 1423.

Reference Paragraph	DID Number	DID Title	Suggested Tailoring
N/A	DI-TMSS-80527	Commercial Off-The-Shelf (COTS) Manuals	Require all data be in the English Language
N/A	DI-TMSS-80528	Supplemental Data for Commercial Off-The-Shelf (COTS) Manuals	Require all data be in the English Language

The above DIDs were those cleared as of the date of this specification. The current issue of DOD 5010.12-L, Acquisition Management Systems and Data Requirements Control List (AMSDL), must be researched to ensure that only current, cleared DIDs are cited on the DD Form 1423.

6.3.1 Technical data. It should be specified in the remarks section of the DD Form 1423 that all technical data furnished should be written in the English language.

6.4 First article. When first article inspection is required, the contracting officer should provide specific guidance to offerors whether the item(s) should be a first article sample, a first production item, or a standard production item from the contractor's current inventory and the number of items to be tested as specified in 4.4. The contracting officer should include specific instructions in acquisition documents regarding arrangements for examinations, approval of first article test results and disposition of first articles. Invitations for bids should provide that the Government reserves the right to waive the requirement for samples for first article inspection to those bidders offering a product which has been previously acquired or tested by the Government, and that bidders offering such products, who wish to rely on such production or test, must furnish evidence with the bid that prior Government approval is presently appropriate for the pending contract.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T04:39Z
Check the source to verify that this is the current version before use.

6.5 Definitions.

6.5.1 Inch-pound units. Inch-pound units are a system of measures based on the yard and pound commonly used in the United States of America and defined by the National Institute of Standards and Technology. Inch-pound units having the same names in other countries may differ in magnitude.

6.5.2 Metric units. Metric units are a system of basic measures defined by the International System of Units based on "Le Systeme International d'Unites (SI)," of the International Bureau of Weights and Measures. These units are described in ASTM E 380 and IEEE 268 (MIL-STD-961).

6.6 Measurement system. In this specification, all measurements, dimensions, sizes, and capacities are given in inch-pound units. These measure-ments may be converted to metric units through the use of the conversion factors and methods specified in FED-STD-376.

6.7 Classification changes. There were no classification changes made in the type I press from the previous issue. The following changes were made in the type II press from the previous issue; sizes 2, 4, 6, 8, 10 and 12 were deleted in this revision. There were no other classification changes made in the type II press.


6.8 Safety and health requirements. The 29 CFR 1910 limits only the total hazard level (noise, radiation, electromagnetic emissions, noxious vapors, air contaminants and heat) of the environment in which a machine will operate. It does not limit the hazard level of individual machines in an operating environment. The procuring activity should analyze the existing hazard level in the proposed operating environment and specify additional requirements necessary to integrate this new machine into its future environment.

6.9 Training. Training required by the procuring activity should be provided as specified in the contract.

6.10 Warrant Warranty requirements should be as specified by the procuring activity in the contract.

6.11 Inspection location. The contractor should identify in his response to the solicitation the location where inspection and tests are to be performed.

6.12 Part or Identifying Number (PIN). The PIN to be used for presses acquired to this specification are created as follows:

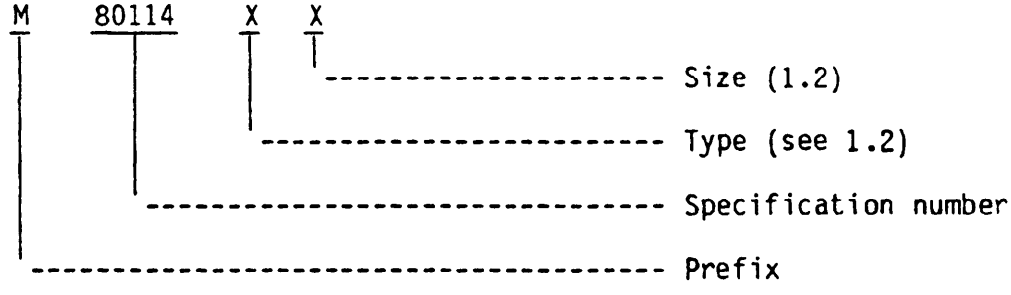

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T04:39Z
Check the source to verify that this is the current version before use.

6.13 Subject term (key word) listing.

Bending
Blanking
Drawing
Fermi ng
Piercing
Trimming

Custodians:
Army - AL
Navy - SH
Air Force - 99

Review activities:
Air Force - 84
DLA - GS

User activities:
Army - AL
Navy - SH
Air Force - 84
DLA - GS

Preparing Activity:
DLA - IP

Project (3442-0056)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T04:39Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.
2. The submitter of this form must complete blocks 4, 5, 6, and 7.
3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	1. DOCUMENT NUMBER	2. DOCUMENT DATE (YYMMDD)
	MIL-P-80114D	900802

3. DOCUMENT TITLE
Presses, Hydraulic, Vertical, C- (Gap) Frame

4. NATURE OF CHANGE (Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.)

5. REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME (Last, First, Middle Initial)	b. ORGANIZATION	
c. ADDRESS (Include Zip Code)	d. TELEPHONE (Include Area Code) (1) Commercial (2) AUTOVON (If applicable)	7. DATE SUBMITTED (YYMMDD)

8. PREPARING ACTIVITY

a. NAME	b. TELEPHONE (Include Area Code)	
Defense Industrial Plant Equipment Ctr. DIPEC-SSG	(1) Commercial (901) 775-6247	(2) AUTOVON (AV) 683-6247
c. ADDRESS (Include Zip Code) 2163 Airways Blvd. Memphis, TN 38114-5051	IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT: Defense Quality and Standardization Office 5203 Leesburg Pike, Suite 1403, Falls Church, VA 22041-3466 Telephone (703) 756-2340 AUTOVON 289-2340	

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T04:39Z
Check the source to verify that this is the current version before use.