MILITARY SPECIFICATION

TEST SET, INVERTER, CONVERTER CHASSIS ASSEMBLY: 11748234

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 This specification covers one type of Inverter, Converter Chassis Assembly Test Set, hereinafter referred to as the "Chassis Assembly" which forms a part of the Electronics System Test Set type AN/TSM-100.

2. APPLICABLE DOCUMENTS

2.1 The following documents, of the issue in effect on the date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein.

SPECIFICATIONS

Military

MIL-T-5422	Testing, Environmental, Aircraft Electronic Equipment
MIL-F-13926	Fire Control Materiel: General Specification Governing the Manufacture and Inspection of
MIL-P-14232	Parts, Equipment and Tools for Ordnance Materiel: packaging of
MIL-T-43435	Tape: Impregnated, Lacing and Tying
MIL-I-45607	Inspection Equipment, Supply and Maintenance of
MIL-C-46357	Computer, Gun Direction: M18 Manufacturing Processes and Inspection of

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Commander, Frankford Arsenal, ATTN: DRDAR-TST-S, Phila., Pa. 19137 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

FSC 4931

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:33Z
Check the source to verify that this is the current version before use.

STANDARDS

Military

MIL-STD-105	Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-810	Environmental Test Methods
MIL-STD-454	General Requirements for Electronic Equipment

DRAWINGS

U.S. Army, Frankford Arsenal

F11748234	Chassis Assembly, Inverter, Converter
D11748247	Schematic Diagram, Electrical, DC Converter and Inverter, Load Panel
B10554604	Wire Runs List, Chassis Assy, Inv. - Conv.

PACKAGING DATA SHEET

11748234	Packaging of Test Set, Chassis Assembly

(Copies of specifications, standards, drawings and packaging data sheets, required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer).

3, REQUIREMENTS

3.1 Fabrication.- The test set shall be manufactured in accordance with Drawing F11748234 and drawings pertaining thereto.

3.2 General specifications.- Where applicable. the chasis assembly shall meet the requirements of MIL-F-13926 and MIL-C-46357 as follows:

3.2.1 MIL-F-13926.

a. Order of precedence.
b. Dimensions and tolerances.
c. Inorganic protective surface finishings.
d. Part identification and marking.
e. Workmanship.
f. Soldering electrical connections.

3.2.2 MIL-C-46357.

a. Etched circuit assemblies.
b. Wiring.
c. Threaded fasteners.
d. Marking.
e. Finishes.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:33Z
Check the source to verify that this is the current version before use.

3.3 Environmental service conditions,

3.3.1 Vibration (nonoperating).- The test set shall be subjected to a simple harmonic motion having excursion as follows:

Frequency (Hz ± 2 percent)	Excursion (double amplitude) (inches ± 10 percent)
5 to 15	0.06
15 to 25	0.04
25 to 55	0.02

The frequency shall be varied logarithmically between 5 and 55 cycles per second (cps) within 15 minutes and returned to 5 cps in 15 minutes. The motion shall be applied to the test set for a period of 30 minutes in each direction of the 3 mutually perpendicular axes (total of 90 minutes), relative to its normal operational position. Subsequent to Vibration, the test set shall not be damaged or adversely affected and shall meet the electrical requirements of 3.4.

3.3.2 Temperatures.

3.3.2.1 Operating.- The chassis assembly shall meet the requirements of 3.4 while exposed to temperatures of +32°F and +131°F.

3.3.2.2 Storage.- The chassis assembly shall meet the requirements of 3.4 at a temperature of between 60°F and 90°F after having been exposed to each temperature of -80°F and +185°F.

3.3.3 Humidity.- The chassis assembly shall function as specified in 3.4 and shall not suffer any damage or deterioration which shall impair satisfactory performance after being subjected to ten consecutive humidity cycles at relative humidities between 85 and 95 percent and temperatures from 82°F to 160°F over a period not less than 240 hours.

3.3.4 Shock.- The chassis assembly shall show no evidence of damage or be adversely affected after being subjected to a total of 18 shocks consisting of three mutually perpendicular axes. Each shock shall have an acceleration of 15 gravity units (G's) and a pulse duration of 11±1 millisecond.

3.3.5 Altitude.

3.3.5.1 Operating.- The chassis assembly shall not be damaged or adversely affected when exposed for a period of not less than four hours to conditions encountered at an altitude of 10,000 feet above sea level. During and subsequent to such exposure the test set shall meet the requirement of 3.4.

3.3.5.2 Nonoperating.- The chassis assembly shall meet the requirements of 3.4 after exposure to conditions encountered at 50,000

Source: https://assist.dla.mil -- Downloaded: 202610-22T19:33Z
Check the source to verify that this is the current version before use.

feet above sea level for a period of not less than one hour, The chassis assembly shall not be damaged or be adversely affected due to such exposure.

3.3.6 Sand and dust.- The equipment shall withstand, in both an operating and nonoperating condition, exposure to sand and dust perticles as encountered in desert areas.

3.3.7 Salt spray.- Equipment shall withstand, in both an operating and nonoperating condition, exposure to salt-sea atmosphere.

3.3.8 Fungus-inert materiels.- The requirements for fungus-inert materiels shall be in accordance with MIL-STD-454, Requirement 4.

3.4 Electrical.

3.4.1 Continuity.- The circuitry shall be in accordance with Wire Runs List B10554604 and electrical schematic drawing D11748247. The Wire Runs List shall take precedence over the schematic drawing. The symbols referenced in subsequent paragraphs pertain to this schematic and are used therein.

3.4.2 Functional.

3.4.2.1 Resistor Loads.

3.4.2.1.1 Conditions of operations.- Unless otherwise specified the requirements of 3,4.2.1 shall be met with the conditions as specified in Table I.

3.4.2.1.2 Resistor load outputs.- When the resistor loads are supplied with the inputs as specified in Table I, the resistor loads shall yield the outputs specified in Table I.

TABLE I

J1 Terminals	D.C. Input Power (Voltage in series with resistor)	D.C. Output Voltage
26 & 32	41.0V ± 1%; 7 ohms, + 1%, 30W	20.5V ± 2%
21 & 32	227.9V ± 1%; 649 ohms, ± 1%, 20W	113.9V ± 2%
6&27	289.4V ± 1%; 698 ohms, ± 1%, 30W	144.7V ± 2%
16 & 32	37.6V ± 1%; 11.8 ohms, ± 1%, 30W	18.8V ± 2%
19 & 32	37.6V + 1%; 11.8 ohms, ± 1%, 30W	18.8V ± 2%
1 & 32	219.6V ± 1%; 201 ohms, + 1%, 30W	109.8V ± 2%
22 & 32	219.6V ± 1%; 201 ohms, ± 1%, 30W	109.8V ± 2%
12 & 18	34.7V ± 1%; 30.1 ohms, ± 1%, low	17.35V ± 2%
11 & 18	67.1V ± 1%; 15.0 ohms, ± 1%, 75W	33.5V ± 2%
2 & 4	259.8V ± 1%; 100 ohms, ± 1%, 75W	173.2V ± 2%
3 & 4	259.8V ± 1%; 100 ohms, ± 1%, 75W	173.2V ± 2%

Source: https://assist.dla.mil -- Downloaded: 2026t0-22T19:33Z
Check the source to verify that this is the currentversion before use.

3.4.2.2 Intermittent switching charge maintenance circuit.

3.4.2.2.1 Conditions of operations.- Unless otherwise stated, the requirements of 3.4.2.2 shall be met with the test configuration shown in Figure 1.

3.4.2.2.2 Charge maintenance.- After the 29.0 ± ,5 Vdc has been removed from between J1-29 and J1-32, the relay shall maintain contact at Al for at least 0.2 seconds. See Figure 1.

3.4.2.2.3 Relay and Diode resistances.- The relay resistance shall be 190 ohms ± 2%, and the diode shall have a forward bias resistance of 5 ohms maximum.

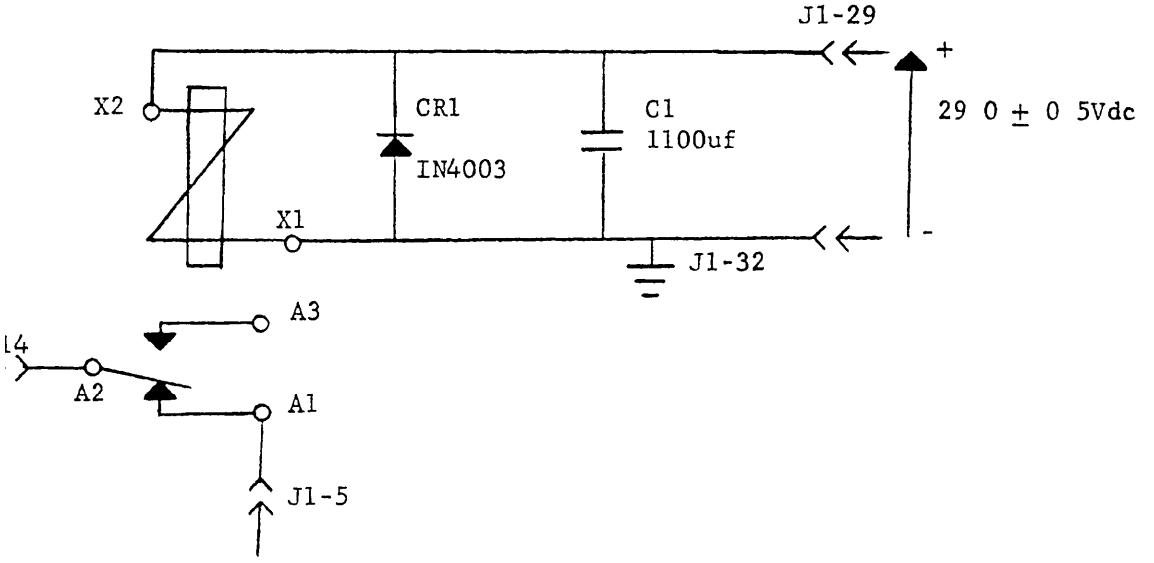


FIGURE 1

3.4.3 Wire (hookup).- Standard conductors of suitable degrees of flexibility shall be used whenever practicable within the requirements of this specification. Hookup wire shall be of such cross section and temper as to provide ample and safe current-carrying capacity and mechanical strength. In general, wire shall not be smaller than AWG No. 22. Wire directly associated with the primary power circuit shall be of a size consistent with the current requirements of the circuit. When it can be demonstrated that the use of smaller hookup wire will result in no loss of performance and at the same time will produce benefits, such as reduction in weight or improved accessibility, smaller wire may be used. This provision is made specifically to permit the use of smaller wire in cables having a large number of wires and having adequate support against adverse effects of vibration. The size of wire leads supplied with parts shall be controlled by the specifications for these parts.

Source: https://assist.dla.mil -- Downloaded: 202610-22T19:33Z
Check the source to verify that this is the current version before use.

3.4.3.1 Insulation on conductors.- Insulation of the sleeve type may be used, provided its length is sufficient to prevent slippage along the conductor to such an extent as to expose a section of the conductor that should be insulated. Insulation shall provide adequate dielectric strength and adequate leakage resistance when the equipment is operated under the designated service conditions. The mechanical and electrical properties of the insulating materiels and impregnating compounds shall not be permanently impaired as a result of being exposed to extremes of temperature incurred in the equipment. Rubber without braid may be used only when the insulation is not depended upon to space or support the conductor, or when a number of conductors are assembled in the form of cordage and the assembly provided with a braid covering which has been suitably varnished or lacquered. All conductor insulation shall be of the noncombustible or slow-burning type; that is, with the insulated conductor held in a horizontal position in still air, self-sustained combustion of the insulation or lacquer shall not progress at a rate in excess of 1 inch in 1 minute.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection.- Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements, as specified herein. Except as otherwise specified, the supplier may utilize his own facilities or any commercial laboratory acceptable to the Government, The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.2 First article (initial production) approval.- The requirements for first article approval and the responsibility (Government or contractor) for first article testing shall be as specified in the contract. The sample for first article approval tests shall be 3 chassis assemblies manufactured in the same manner using the same materiels, equipment, processes, and procedures as used in regular production. All parts and materiels, including packaging and packing, shall be obtained from the same source of supply as used in regular production.

4.2.1 Government testing.- When the Government is responsible for conducting first article approval tests, the contractor, prior to submitting the sample to the Government, shall inspect the sample to insure that it conforms to all the requirements of the contract and submit a record of this inspection with the sample, including certificates of conformance for materiels.

4.2,2 Contractor testing.- When the contractor is responsible for conducting first article approval tests, the sample shall be inspected by the contractor for all the requirements of the contract. The sample and a record of this inspection, including certificates of conformance for materiels, shall be submitted to the Government for approval. The Government reserves the right to witness the contractor's inspection.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:33Z
Check the source to verify that this is the current version before use.

4.3 Inspection provisions.

4.3.1 Submission of product.- Unless otherwise specified herein, or by the contracting officer, inspection lot size, lot formation and presentation of lots shall be in accordance with “Submission of Products” as specified in MIL-STD-105.

4.3.2 Examinations and tests.- Except where otherwise specified herein, components and subassemblies shall be inspected in accordance with the “Inspection provisions for components and subassemblies” and the Sampling Plan Tables contained in MIL-F-13926. Examinations and tests related to Section 3 herein shall be performed in accordance with Tables II and III and test methods and procedures in 4.5. Examinations and tests for packaging, packing and marking shall be in accordance with MIL-P-14232 and Section 5 herein.

4.3.2.1 Components and subassemblies.- Printed circuit subassemblies shall be inspected in accordance with the inspection provisions of MIL-C-60898. All other components and subassemblies shall be inspected to the applicable requirements of MIL-F-13926.

4.3.2.2 Control tests.- One chassis assembly shall be selected at random as a control sample from each 100 produced. The control samples shall meet the requirements and tests of Table II after they have met the requirements and tests of Table III.

TABLE II

TEST	REQUIREMENT	TEST PROCEDURES
Fabrication	3.1	Applicable drawings-visual
General specifications	3.2	Visual-tactile
Vibration	3.3.1	4.5.1.1, 4.5.1.2
Temperature	3.3.2, 3.4.3	4.5.1.1, 4.5.1.4
Humidity	3.3.3	4.5.1.1, 4.5.1.3
Shock	3.3.4	4.5.1.1, 4.5.1.5
Altitude	3.3.5	4.5.1.1, 4.5.1,6
Sand and dust	3.3.6	4.5.1.1, 4.5.1.7
Salt Spray	3.3.7	4.5.1.1, 4.5.1.8
Fungus	3.3.8	4.5.1.1, 4.5.1.9

4.3.3 Acceptance and rejection. - Rejected lots shall be screened for all defective characteristics, Removal or correction of defective units and resubmittance of rejected lots shall be in accordance with “Acceptance and Rejection” as specified in MIL-STD-105.

4.3.4 Functional tests.- The requirements and tests in Table III shall be inspected on a 100% basis. Unless otherwise specified, all examinations and tests shall be conducted at the following standard ambient conditions:

Source: https://assist.dla.mil -- Downloaded: 202610-22T19:33Z
Check the source to verify that this is the current version before use.

a.	Temperature	+50°F to +90°F
b.	Relative humidity	90% RH max.
c*	Pressure	28 to 32 inches of Hg

TABLE 111
(100 Percent Inspection)

	CHARACTERISTIC	REQUIREMENT	PROCEDURE
101.	Continuity Test	3.4.1	4.5.2.1
102.	Resistor Loads Conditions of Operations .	3.4.2.1.1	4.5.2.2.2.1
103.	Resistive Loads Output	3.4.2.1.2	4.5.2.2.2.2
104.	Intermittent Switching Charge Maintenance Circuit Conditions of Operations	3.4.2.2.1	4.5.2.2.3.1
105.	Charge Maintenance	3.4.2.2.2	4.5.2.2.3.2
106.	Relay and Diode Resistance	3.4.2.2.3	4.5.2.2.3.3

4.4 Inspection equipment.- Except as otherwise provided for by the contract, the contractor shall supply equipment in accordance with the applicable requirements of MIL-I-45607. The Government reserves the right to use the test equipment for its own independent inspections to the extent that such use will not unduly interfere with the contractor's delivery schedule.

4.4.1 Contractor design.- The contractor shall provide inspection equipment compatible with the "Test Methods and Procedures" specified in 4.5 and with the "Component Inspection" and "Test Facilities" requirements of MIL-F-13926. Since tolerance of test equipment is normally considered to be within 10% of the product tolerance for which it is intended, this inherent error in the test equipment design must be considered as part of the prescribed product tolerance limit. Thus, concept, construction, materiels, dimensions and tolerances used in the design of test equipment shall be so selected and controlled as to insure that the test equipment will reliably indicate acceptability of a product which does not exceed 90% of the prescribed tolerance limit, and permit positive rejection when nonconforming, Construction shall be such as to facilitate routine calibration of test equipment.

4.4.1.1 Test equipment.- In conjunction with 4.4.1, the following test equipment shall be utilized in the performance of the applicable tests as specified in 4.5.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:33Z
Check the source to verify that this is the current version before use.

ITEM		DESCRIPTION
1.	Power Supply	0-300Vdc adjustable, 0-3 amps, 100 mv resolution, load regulation, of ±0.5%, than .1% ripple,
2.	Digital Multimeter	D.C. Voltmeter: 0-300V, 0.1% accuracy, input impedance shall be 1 megohms or greater,
3.	Analog Voltmeter	0-50 Vdc, 2% accuracy
4.	Ammeter	0-200 ma dc, ±1% accuracy
5.	Test Resistor Harness	Table IV and Figures 2 thru 12
6.	Switch (S-1)	8437461-2

TABLE IV

TEST RESISTOR HARNESS, ITEM 9

DESIGNATION	PART	DESCRIPTION
RT 13	Resistor	MIL-R-18546D, RE75N14R0
RT 1	Resistor	MIL-R-18546D, RE75N14R0
RT 2	Resistor	MIL-R-18546D, RE70N6490
RT 5	Resistor	MIL-R-18546D, RE75N6980
RT 9	Resistor	MIL-R-18546D, RE75N11R8
RT 10	Resistor	MIL-R-18546D, RE75N11R8
RT 4	Resistor	MIL-R-18546D, RE75N4020
RT 14	Resistor	MIL-R-18546D, RE75N4020
RT 3	Resistor	MIL-R-18546D, RE75N4020
RT 15	Resistor	MIL-R-18546D, RE75N4020
RT 11	Resistor	MIL-R-18546D, RE65N30R1
RT 12	Resistor	MIL-R-18546D, RE77N15R0
RT 6	Resistor	MIL-R-18546D, RE77N1000
RT 7	Resistor	MIL-R-18546D, RE77N1000

Source: https://assist.dla.mil -- Downloaded: 202610-22T19:33Z
Check the source to verify that this is the current version before use.

4.5 Test methods and procedures,

4.5.1 Environmental.

4.5.1.1 Test conditions.- The chassis assembly shall be mounted in an upright position in a manner similar to that in which it will be in service and shall be subjected to the environmental tests of the following subparagraphs. The atmospheric pressure shall be room ambient, Except for the high and low temperature tests or the humidity tests, as applicable, the temperature and humidity shall be room ambient.

4.5.1.2 Vibration.- The vibration test shall be made on a device with means provided for measuring and controlling the direction of vibration and adjusting and amplitudes and frequencies to keep them within the specified limits of 3.3.1. The measuring instruments of the testing device shall be capable of measuring the vibration amplitude within plus or minus 5 percent, and capable of measuring the frequency within plus or minus 2 percent. The test shall be performed in accordance with the requirements specified in 3.3.1. Subsequent to the vibration test, the test shall show no damage or defect resulting from the test when examined by visual and tactile means. The chassis assembly shall then be tested to determine compliance with requirements specified under 3.3.1.

4.5.1.3 Humidity.- The humidity test shall be performed in accordance with Procedure 1 of Method 507 in MIL-STD-810. Subsequent to the humidity test, the chassis assembly shall be tested to determine compliance with 3.3.3.

4.5.1.4 Temperature.- Test in accordance with Procedure 1 of Method 501 in MIL-STD-810 for high temperature operating and nonoperating under conditions specified in 3.3.2. Test in accordance with Procedure 1 of Method 502 for low temperature operating and nonoperating under conditions specified in 3.3.2, and verify requirements of 3.3.2.1 and 3.3.2.2.

4.5.1.5 Shock.- The shock test shall be performed in accordance with MIL-T-5422.

4.5.1.6 Altitude.- The altitude test shall be performed in accordance with the following steps:

Step 1. Place the chassis assembly in the test chamber in a manner that will simulate service usage, making connections and attaching instrumentation as necessary. Plugs, covers, and inspection plates not used in operation, but used in servicing shall remain in place. When mechanical or electrical connections are not used, the connections normally protected in service shall be adequately covered. For tests where temperature values are controlled, the test chamber shall be at standard ambient conditions when the chassis assembly is installed, The chassis assembly shall then be operated to determine that no malfunction or damage was caused due to faulty installation or handling, The requirement for operation following installation of the chassis assembly in the test facility is applicable only when operation is

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:33Z
Check the source to verify that this is the current version before use.

required during or immediately following exposure to the specified test. Standard ambient temperature shall be maintained during the entire test.

Step 2. Reduce the chamber internal pressure to 87.5mm of Hg (3.44 in. of Hg or 50,000 ft. above sea level). The rate of pressure change may be the maximum attainable by the chamber. Maintain the chamber pressure for a period of not less than one hour.

Step 3. Increase the chamber pressure to 523mm of Hg (20.6 in, of Hg or 10,000 ft. above sea level) and then operate the chassis assembly and compare the results with the data obtained in accordance with pretest performance record made of all data necessary to determine compliance with required performance.

Step 4. With the chassis assembly not operating, return the chamber to standard ambient conditions.

Step 5. Operate the chassis assembly and compare the data obtained with the data obtained in accordance with pretest performance record.

Step 6. The chassis assembly shall be visually inspected and a record made of any damage or deterioration resulting from the test. If a test chamber is used for the test, perform a visual inspection of the test within the chamber at test conditions, when possible. Upon completion of the test, visually inspect the chassis assembly again after the chassis assembly has been returned to standard ambient conditions. Deterioration, corrosion or change in tolerance limits of any internal or external parts which in any manner prevent the chassis assembly from meeting operational service or maintenance requirements shall provide reason to consider the chassis assembly as having failed to withstand the conditions of the test.

4.5.1.7 Sand and dust.- The sand and dust test shall be performed in accordance with MIL-T-5422.

4.5.1.8 Salt spray.- The salt spray test shall be performed in accordance with MIL-T-5422.

4.5.1.9 Fungus.- The fungus resistance test shall be performed in accordance with MIL-T-5422.

4.5.2 Electrical tests.

4.5.2.1 Continuity test.- A continuity test shall be performed to verify conformance to 3.4.1.

4.5.2.2 Functional tests.

4.5.2.2.1 Resistor loads.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:33Z
Check the source to verify that this is the current version before use.

4.5.2.2.1.1 Conditions of operation.- Connect Power Supply (Item 1), Digital D.C. Voltmeter (Item 2) and Test Resistor Harness (Item 5) to Resistor load terminals as shown in Table V and Figures 2 through 12 respectively.

4.5.2.2.1.2 Resistor load outputs. - Adjust Power Supply (Item 1) and read D.C. Output Voltage on D.C. Voltmeter (Item 2) for each J1 terminal pair specified in Table V to insure conformance to 3.4.2.1.2.

TABLE V

J1 Terminal	Figure	Power Supply Setting in Volts D.C.	Output Voltage In Volts D.C.
26 & 32	3	41.0 ± 1%	20.5 ± 270
21 & 32	4	227.9 ± 1%	113.9 ± 2%
6 & 27	5	289.4 ± 1%	144.7 ± 2%
16 & 32	6	37.6 ± 1%	18.8 ± 2%
19 & 32	7	37.6 ± 1%	18.8 ± 2%
1 & 32	8	219.6 ± 1%	109.8 ± 2%
22 & 32	9	219.6 ± 1%	109.8 ± 2%
12 & 18	10	34*7 ± 1%	17.35 ± 2%
11 & 18	11	67.1 ± 1%	33.5 ± 2%
2 & 4	12	259,8 ± 1%	173.2 ± 2%
3 & 4	13	259.8 ± 1%	173.2 ± 2%

4.5.2.2.2 Intermittent switching charge maintenance circuit.

4.5.2.2.2.1 Conditions of Operations.- Connect Power Supply (Item 1) and Ammeter (Item 4) through Switch S-1 (Item 6) to J1-29 terminal and Analog Voltmeter (Item 3) between J1-14 and J1-5 terminals as shown in Figure 13.

4.5.2.2.2.2 Charge maintenance.- Adjust Power Supply to 29.0 ± 0.5 Vdc and turn Switch to ON position, the Ammeter shall read 150 ma ± 10%, and the Analog Voltmeter shall indicate continuity.Turn Switch to OFF position and the Analog Voltmeter shall indicate the relay is making contact at A1 and A2 for at least 0.2 seconds after the Switch had been turned to the OFF position.

Source: https://assist.dla.mil -- Downloaded: 202610-22T19:33Z
Check the source to verify that this is the current version before use.

4.5.2.2.2.3 Relay and Diode Resistances.- With the Switch turned to OFF position, connect the + lead of the Digital D.C. Voltmeter (Item 2) to the cathode side of the diode (J1-29) and the common lead to J1-32 terminal, the Digital D.C. Voltmeter shall read the relay resistance of 193 ohms ± 2%. Reverse the leads of the Digital D.C. Voltmeter, and read the diode resistance of 5 ohms maximum.

4.5.3 Wire insulation.- Wire insulation requirements shall be verified by certification.

5. PREPARATION FOR DELIVERY

5.1 Preservation, packaging, packing, and marking.- Preservation, packaging, packing, and marking shall be in accordance with Packaging Data Sheet 11748234.

6. NOTES

6.1 Intended use.- This chassis assembly is designed for rackmounting into the AN/TSM-100 Electronics System Test Set, which is used for troubleshooting and performance checking of specific weapon system components.

6.2 Ordering data.- Procurement documents should specify the following:

a. Title, number and date of this specification,

b. Applicable stock number.

c. A block of serial numbers to identify each chassis assembly.

d. Instructions for first article inspection.

e. Level of protection required.

Custodian:

Army - MU

Preparing Activity:

Army - MU

Project No. 4931-A152

Source: https://assist.dla.mil -- Downloaded: 202610-22T19:33Z
Check the source to verify that this is the current version before use.

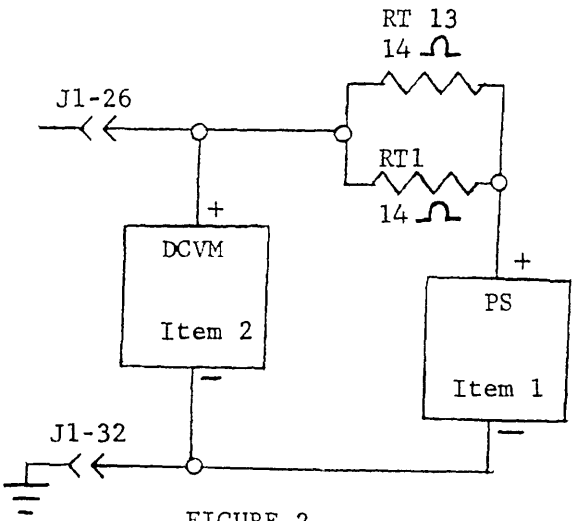


FIGURE 2

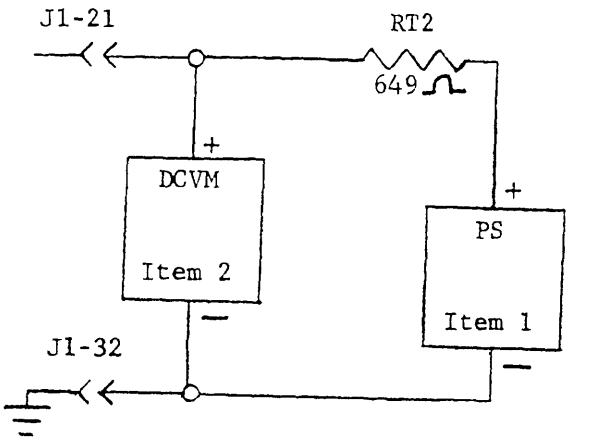


FIGURE 3

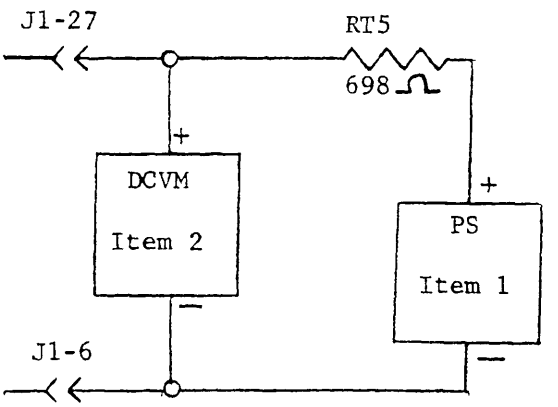


FIGURE 4

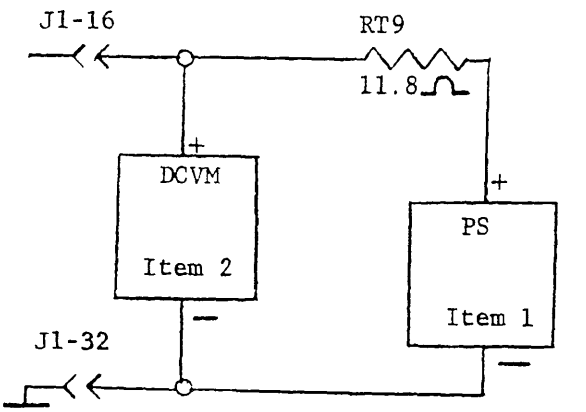


FIGURE 5

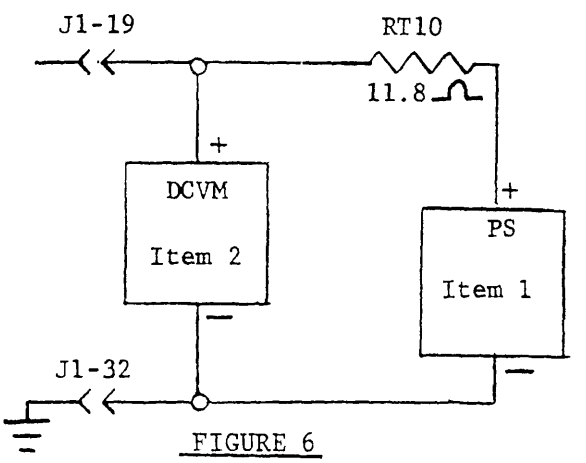


FIGURE 6

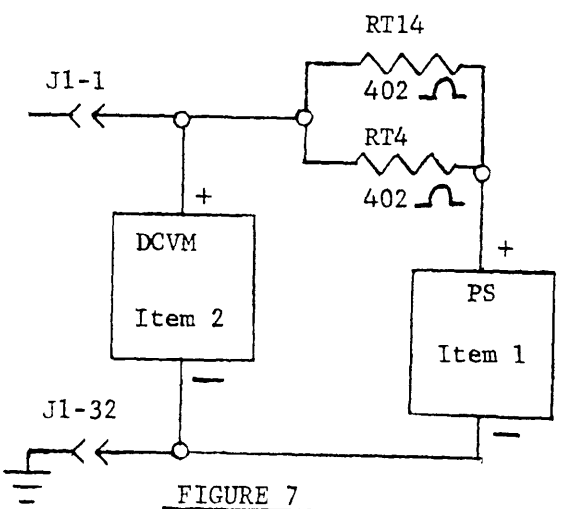


FIGURE 7

Source: https://assist.dla.mil -- Downloaded: 202640-22T19:33Z
Check the source to verify that this is the currentversion before use.

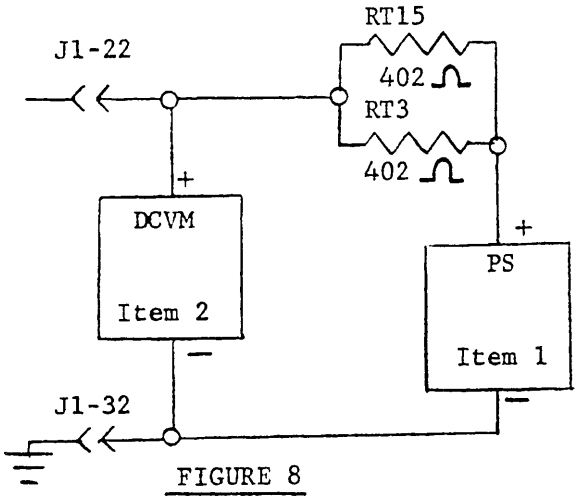


FIGURE 8

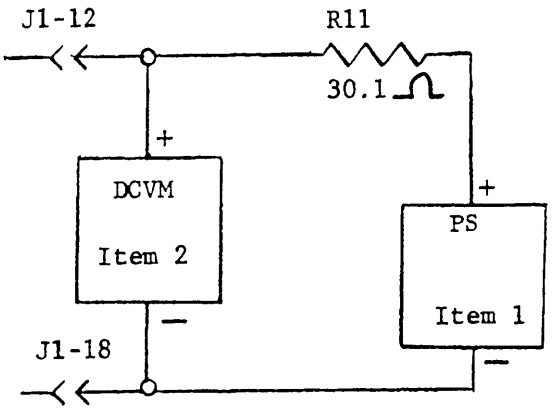


FIGURE 9

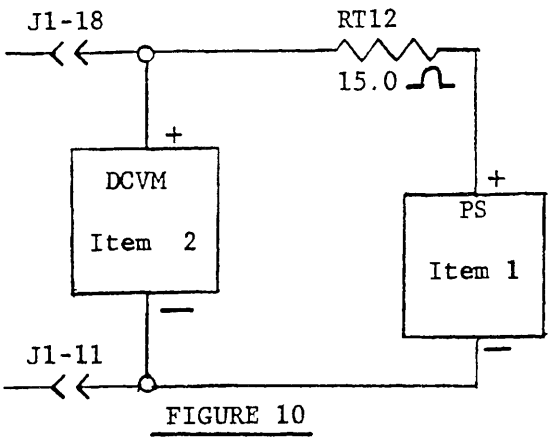


FIGURE 10

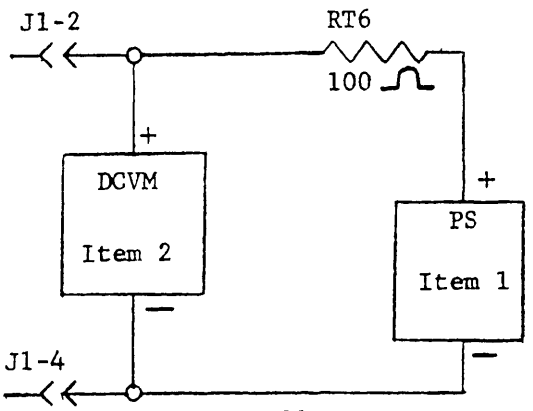


FIGURE 11

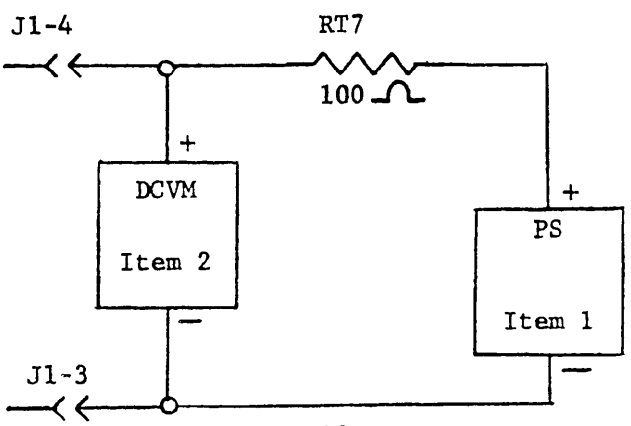


FIGURE 12

Source: https://assist.dla.mil -- Downloaded: 202610-22T19:33Z
Check the source to verify that this is the current version before use.

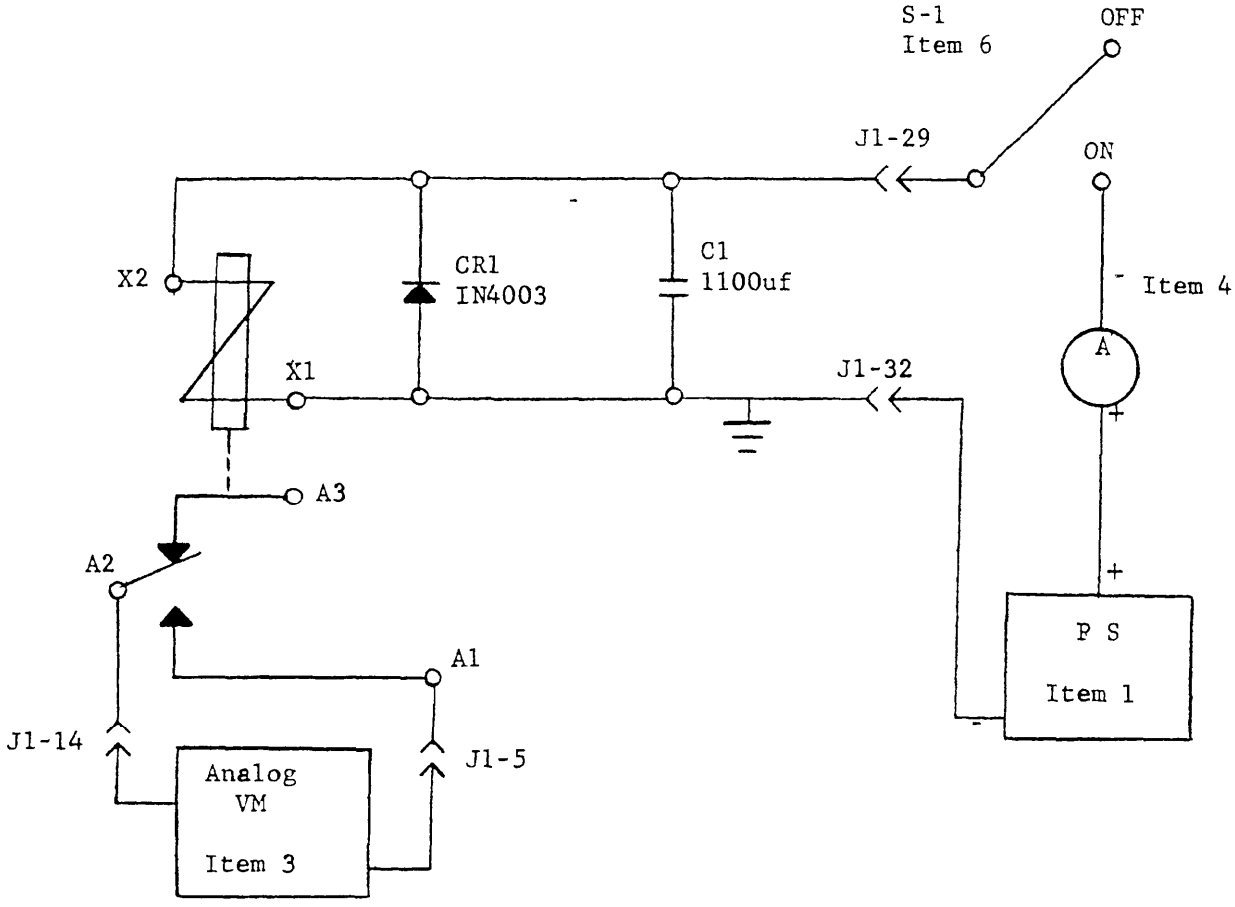


FIGURE 13

Source: https://assist.dla.mil -- Downloaded: 202610-22T19:33Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE MIL-T-48599(MU)
Test Set, Inverter, Converter Chassis Assembly: 11748234

NAME OF ORGANIZATION AND ADDRESS	CONTRACT NUMBER
	MATERIAL PROCURED UNDER A ☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?
   A. GIVE PARAGRAPH NUMBER AND WORDING.

   B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?
   ☐ YES ☐ NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*	TELEPHONE NO.
	DATE

DD FORM 1 JAN 72 1426 REPLACES EDITION OF 1 JAN 66 WHICH MAY BE USED

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:33Z
Check the source to verify that this is the current version before use.

FOLD

POSTAGE AND FEES PAID
DEPARTMENT OF THE ARMY
DOD – 314



OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

Commander
US Army Armament Research & Development Command
ATTN: DRDAR-TST-S
Dover, NJ 07801

FOLD

Source: https://assist.dla.mil -- Downloaded: 202640-22T19:33Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:33Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:33Z
Check the source to verify that this is the current version before use.