[INCH-POUND]
A-A-2576A
April 30, 1992
SUPERSEDING
January 14, 1988

COMMERCIAL ITEM DESCRIPTION

SCALE, AREA (TRANSPARENT PLASTIC)

The General Services Administration has authorized the use of this commercial item description in preference to Federal Specification GG-S-150

This description covers transparent plastic scales for measuring and estimating areas of land and for use in map estimating of land and shall be furnished in two types, as specified:

Type I - Circle and grid method
Type II - Dotted square method

Salient characteristics.

Material and construction. Clear, transparent acrylic or vinyl plastic and shall be thin, flat with a rectangular shape.

Dimensions.
Type I - 5-1/4 by 2-5/8 inches, approximately.
Type II - 6-3/8 by 2-5/8 inches, approximately

Graduations and markings. Shall be permanent and colored and shall a tolerance of ± 0.015 inches.

Type I (figure 1)
Linear scales.
10 scale (5 inches long) divided in 1/10 of an inch and numbered every inch.

1320 scale - 1 inch = 1320 feet, divided in 100 feet and numbered every 400 feet.

* 660 scale - 1 inch = 660 feet, divided in 50 feet and numbered every 200 feet.

* Mile scale - 8 inches = 1 mile, divided and numbered at 1/8, 1/4 and 1/2 mile.

* May be compiled into one.

Area scales.
A circle to indicate each of the areas of .1, .2, .4, .6, .8, 1.0, 1.2/1.5, 2.0, 2.5 and 3.0 acres. For direct acreage reading on a 600 scale (figure 1).
Multiple squares to indicate .1, .5, 1.0, 2.5, 5.0, 10 acres.
Square measure ratio of 1 square inch = 10 acres.

DISTRIBUTION STATEMENT A: Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:24Z
Check the source to verify that this is the current version before use.

Type II (figures 2 &3)

Linear scales.

10 scale (6 inches long) divided in 1/10 of an inch and numbered every inch. (figure 2).

Rod scale - 1 inch = 40 rods, divided every one rod and numbered every 10 rods (figure 3).

44 scale - 1 inch = 440 feet = 1/12 mile, divided every 10 feet and numbered every 100 feet (figure 2).

66 scale - 1 inch = 660 feet = 1/8 mile, divided every 10 feet and numbered every 100 feet (figure 3).

Linear scales shall have white or near-white non-transparent backgrounds for good visibility of graduations and numbers.

Area scales.

Eight one inch squares. Each square containing 100 dots represent 10 acres. (Based on 660 scale - see figures 1 & 2).

Sixteen 1/2 inch squares. Each square containing 25 dots represents 2.5 acres. Each dot represents 1/10 acre. (Based on 660 scale - see figure 1 & 2).

The end margins on Type II scales shall have white or near-white non-transparent backgrounds, printed with "SCS", "At 440 each dot equals .044 acre", "At 660 each dot equals 1/10 acre". (See figures 2 & 3).

Marking. The manufacturer's name, trade-mark or other identifying information shall be marked on the scales.

Pocket clip. A metal pocket clip shall be provided on Type I scale, located near one end as indicated in figure 1.

Workmanship. The scales shall have no rough edges or burrs and the working edges shall be straight. Scales shall be free from defects which might impair durability, appearance or serviceability.

Performance testing. A clean white cloth shall be moistened with water and rubbed under pressure, along the full length of one of the graduated surfaces of the scale, keeping the same portion of the cloth in contact with the scale at all times. The graduations and markings shall be rubbed no less than ten times in each direction. Any adverse effect on the graduations or marking, or any traces of coloring matter on the cloth shall constitute failure of this test.

QUALITY ASSURANCE PROVISIONS.

Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:24Z
Check the source to verify that this is the current version before use.

Sampling. Sampling for inspection and tests shall be performed in accordance with MIL-STD-105. For purposes of sampling, a lot shall consist of all scales of the same description manufactured under the same conditions at essentially the same time.

Sampling for tests and visual inspection. A random sample shall be taken from each lot in accordance with Inspection Level S-3. The AQL shall not exceed 2.5 percent defective. The sample shall be one scale for testing and one scale for visual inspection.

Regulatory requirements. In accordance with section 23.403 of the Federal Acquisition Regulations, The Government's policy is to acquire items composed of the highest percentage of recovered materials practicable, consistent with maintaining a satisfactory level of competition without adversely affecting performance requirements or exposing supplier's employees to undue hazards from the recovered materials.

Preservation, packaging, packing, labeling and marking. The preservation, packaging, packing, labeling and marking shall be as specified in the contract or purchase order.

Note: Purchaser shall specify the type of scale desired:

Type I	NSN 6675-00-050-8044
Type II	NSN 6675-00-340-1259

PREPARING ACTIVITY

GSA - FSS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:24Z
Check the source to verify that this is the current version before use.

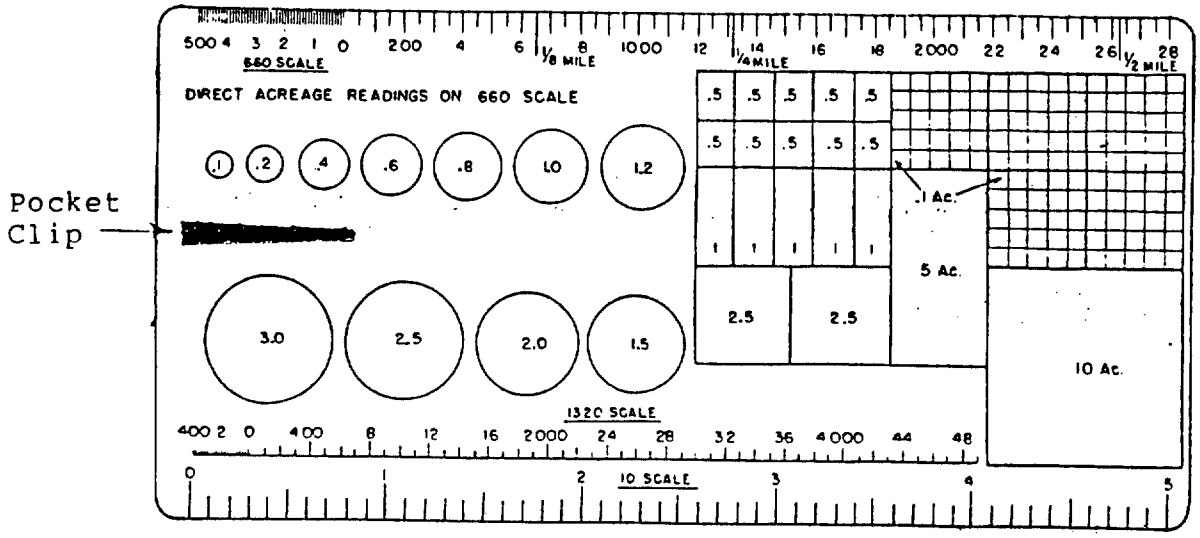


Figure 1

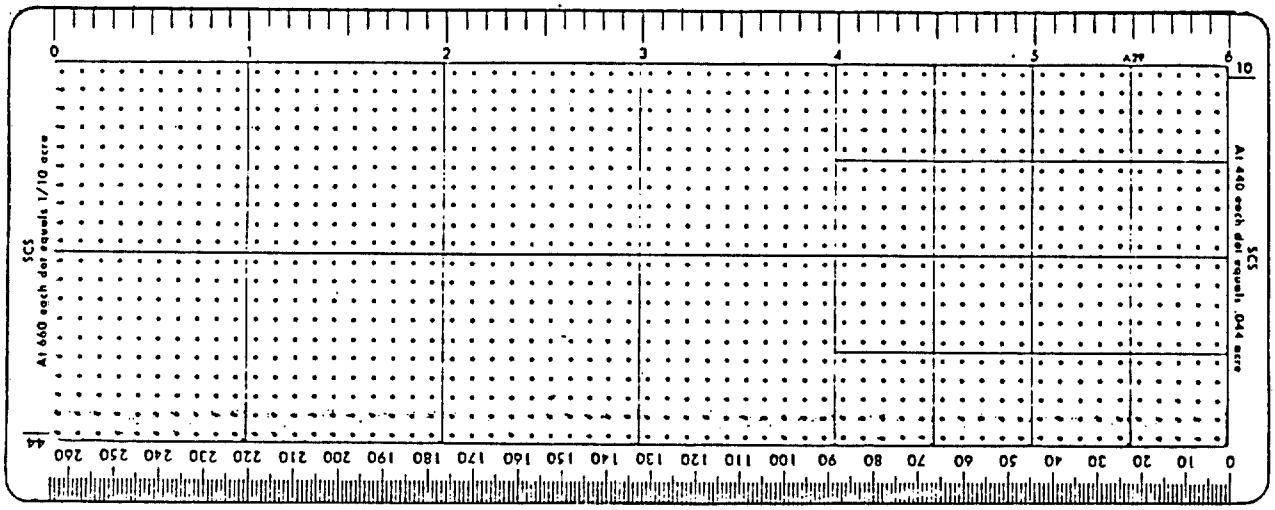


Figure 2

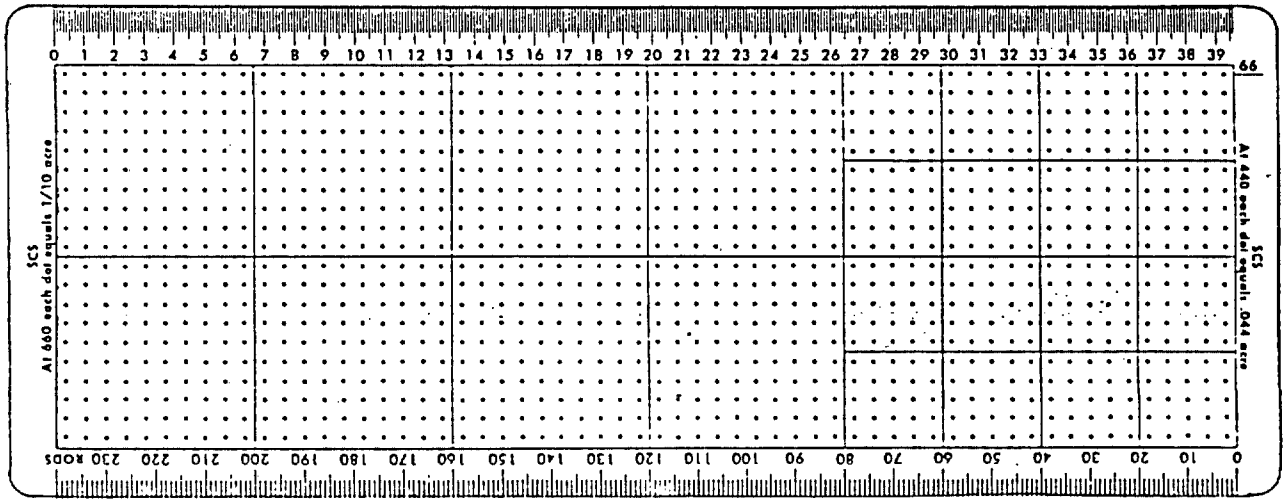


Figure 3

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:24Z
Check the source to verify that this is the current version before use.