[INCH-POUND]
A-A-2972
June 25, 1996
SUPERSEDING
GGG-E-00930
December 20, 1963

COMMERCIAL ITEM DESCRIPTION

EXTRACTOR, ELECTRON TUBE (TONG TYPE)

The General Services Administration has authorized the use of this Commercial Item Description for procurement of the electron tube extractor specified in GGG-E-00930 for all federal agencies.

1. SCOPE

This Commercial Item Description covers a tong type tube extractor used to facilitate the removal of electron tubes from electronic equipment and prevent burning of the operator's fingers. The tool may also be used to install tubes.

2. CLASSIFICATION

Not Applicable.

3. SALIENT CHARACTERISTICS

3.1 Design and construction.

The electron tube extractor shall be of the tong type (see Fig. 1). The extractor shall consist essentially of two arms with cushioned prongs. The two arms shall be revited together with a 3/32 inch minimum diameter rivet in such a manner that the extractor will operate freely, without excessive play, and the finger bows and prongs are in proper alignment. The rivet shall be neatly headed. Each finger bow shall have an inside radius of 9/16 inch, plus or minus 5/64 inch. The arms shall be of 3/16 inch diameter steel, flattened for a distance of at least 7/16 inch on both sides of the rivet hole, to a thickness of 3/32 inch. The outer surface of the flattened portion on each arm shall lie in a plane with the outside of the arm, so that when the extractor arms are riveted together, the tool will be symmetrical. The overall length of the tool, measured in the closed position shall be 8 inches, plus or minus 1/4 inch. The center of the rivet shall be located 4 3/8 inches, plus or minus 1/8 inch from the finger bow end of the extractor. The metal portions of the prongs shall be formed concavely to a 1/2 inch radius for a distance of at least 1 inch, measured from the far end of the prong, to a thickness of approximately 3/64 inch. After the prongs have been vulcanized in place, and the extractor "opened-up" so the arms are at an included angle of 16°, the extractor shall have the prongs in a parallel position, and the measurement inside the jaws shall be approximately 15/16 inch (see Fig. 1).

3.2 Material. The two arms of the extractor shall be of hardened and tempered steel. The material to be vulcanized on the prongs shall be approximately 1/32 inch thick neoprene having a durometer hardness of 40 to 45, or any equivalent oil, grease and heat resistant cushioning material.

Beneficial comments, recommendations, additions, deletions, clarifications, etc. and any other data which may improve this document should be sent to: General Services Administration, Federal Supply Service, Tools and Appliances Commodity Center, Washington, DC 20406.

FSC 5120

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:28Z
Check the source to verify that this is the current version before use.

3.3 Finish. The exposed metal surface of the extractor, not covered by cushioning material, shall be zinc or nickel plated.

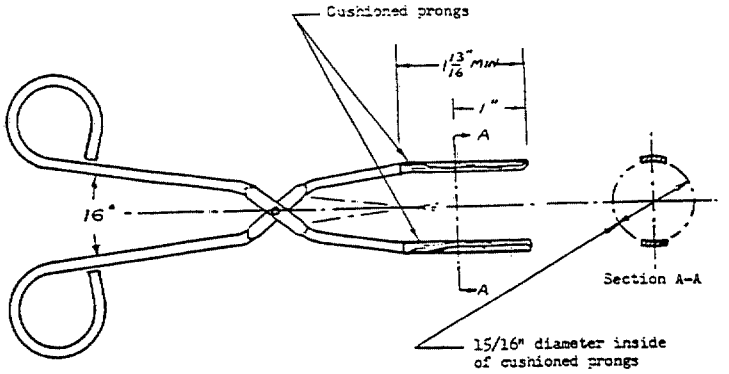


Figure 1. Extractor, electron tube

3.4 Workmanship. Details of workmanship shall be in accordance with the best commercial standards and practices. Coatings, platings, and finishes shall be smooth adherent, continuous, and not stained or discolored. External surfaces shall be free of tool and gouge marks, nicks, or other surface imperfections. The item shall be free from manufacturing workmanship defects (e.g. sharp or rough external edges, corners or surfaces) and material workmanship defects (e.g., pits, rips, fins, burrs, tears nodules, cracks, blisters) which may adversely impact the item's serviceability, durability, safety or appearance.

3.5 Identification marking. The extractor shall be marked with the manufacture's name or identifying symbol, and the state or country of manufacture, unless otherwise specified. All identification markings shall be engraved, etched, molded, or indented directly on the item's surface in such a manner that it remains clearly legible throughout the life of the item.

4. REGULATORY REQUIREMENTS

4.1 Recovered materials. The offeror/contractor is encouraged to use recovered materials to the maximum extent practicable, in accordance with paragraph 23.403 of the Federal Acquisition Regulation (FAR).

4.2 Metric products. Products manufactured to metric dimensions will be considered on an equal basis with those manufactured using inch-pound units, provided they fall within the tolerances specified (using conversion tables contained in the latest revision of Federal Standard 376) and all other requirements of this document are met. If a product is manufactured to metric dimensions and those dimensions exceed the tolerances specified in the inch-pound units, a request should be made to the Contracting Officer to determine if the product is acceptable.

5. QUALITY ASSURANCE PROVISIONS

5.1 Product conformance. The product provided to the Government shall conform to the contractually specified requirements. For product characteristics and requirements which are not contractually specified, the provided product shall conform to the producer's own drawings, standards, specifications, and quality assurance practices for the highest quality product provided commercially offered by the producer. If the product is not commercially offered by the producer, the best commercial practices shall apply. The Government reserves the right to require proof of such conformance prior to first delivery and thereafter as provided for under the provisions of the contract.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:28Z
Check the source to verify that this is the current version before use.

5.2 Responsibility for inspection. Unless otherwise specified, the contractor is responsible for the performance of all inspection requirements and may use any commercial facilities (including the contractor's own facilities) suitable for performance of the inspection requirements, unless disapproved by the Government. The Government reserves the right to perform any of the inspections deemed necessary to assure the item conforms to the specified requirements.

5.3 Bid sample(s). When a bid sample requirement is specified in the solicitation, the bid sample(s) shall be inspected for all salient characteristics. A failure of any bid sample to meet the salient characteristics shall be cause for rejection.

5.4 First article sample(s). When a first article requirement is specified in the contract, the first article sample(s) shall be inspected for all salient characteristics. A failure of any first article sample to meet the salient characteristics shall be cause for rejection.

6. PACKAGING

6.1 Packaging. Requirements for preservation, packing, packaging and marking of packages shall be as specified in the contract or order.

7. NOTES

(This section contains information of a general or explanatory nature that is not mandatory.)

7.1 Addresses for obtaining copies of reference documents.

Federal Specifications: Federal Supply Service Bureau, Specification Section, Suite 8100, 470 L'Enfant Plaza, SW, Washington, DC, 20407.

Federal Acquisition Regulations (FAR): Government Printing Office Superintendent of Documents, Washington, DC 20401-9371.

ANSI/ASQC Z1.4: American Society for Quality Control, PO Box 3005, 611 E. Wisconsin Ave., Milwaukee, WI 43201-4606.

7.2 Ordering data. Purchasers should select the preferred options permitted herein and shall include the following information in procurement documents:

(a) Title, number, and date of this Commercial Item Description.
(b) When applicable, the appropriate NSN.
(c) If bid samples are required and the number of samples required.
(d) If first article samples are required and the number of samples required.
(e) If lot sampling inspections are required and the applicable lot sampling requirements. For example:

Sampling for inspection. Sampling for inspection shall be in accordance with ANSI/ASQC Z1.4.

Examinations. Each sample tool shall be examined for all salient characteristics. The Inspection Level shall be S-3 with an Acceptable Quality Level (AQL) of 2.5 percent defective.

(f) What preservation, packaging, and marking are required.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:28Z
Check the source to verify that this is the current version before use.

7.3 National Stock Numbers (NSNs). The following NSN corresponds to this CID. NSN shown may not be indicative of all possible NSNs associated with this CID:

NSN 5120-00-293-0808

Military Interests:

None: DoD has no registered interest in revisions and notices to this Commercial Item Description until further notice.

Preparing Activity

GSA - FSS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:28Z
Check the source to verify that this is the current version before use.