
MILITARY SPECIFICATION SHEET

CABLE, ELECTRIC, AEROSPACE VEHICLE, MIL-W-5086/2 BASIC WIRES, UNSHIELDED, UNJACKETED, 600-VOLT, 105° C

This specification is mandatory for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the cable described herein shall consist of this document and the issues in effect of Specification MIL-C-7078 and Specification Sheet MIL-W-5086/2.

SIZES 22 THROUGH 10 INACTIVE FOR NEW DESIGN IN AIRCRAFT APPLICATIONS AFTER DATE OF ISSUE

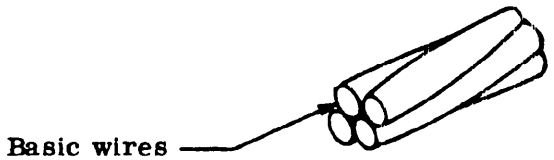

Basic wires
(MIL-W-5086/2)

UNSHIELDED UNJACKETED CABLE

REQUIREMENTS:
CONSTRUCTION DETAILS: See above Figure and Table I
VOLTAGE RATING: 600 Volts (rms) at sea level
TEMPERATURE RATING: 105° C (221° F), max conductor temperature
COLD BEND: Not applicable
THERMAL SHOCK TEST: Not applicable
HEAT RESISTANCE: Not applicable
DIELECTRIC FLAWS (SPARK TEST); 5000 Volts (rms)
DRY DIELECTRIC: 1500 volts (rms)
PART NUMBER: Part numbers in this specification sheet are coded as in the following example:

M7078/24	-	22	-	2
specification sheet number		size number of basic wires		quantity of conductors (basic wires) in cable

FSC 6145

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T07:59Z
Check the source to verify that this is the current version before use.

TABLE I

CABLE PART NO.	MAJOR DIAMETER OF CABLE (in.) (max.)	WEIGHT OF CABLE (lb/1000 ft)	
		(nom) 1/	(max)
M7078/24-22-2	.160	9.1	9.6
M7078/24-22-3	.172	13.8	14.5
M7078/24-22-4	.193	18.4	19.4
M7078/24-22-5	.216	23.0	24.2
M7078/24-22-6	.240	27.8	29.3
M7078/24-22-7	.240	32.5	34.2
M7078/24-20-2	.180	13.2	13.9
M7078/24-20-3	.194	20.0	21.0
M7078/24-20-4	.217	26.6	28.0
M7078/24-20-5	.243	33.3	35.0
M7078/24-20-6	.270	40.3	42.4
M7078/24-20-7	.270	47.0	49.5
M7078/24-18-2	.200	18.4	19.4
M7078/24-18-3	.215	27.9	29.4
M7078/24-18-4	.241	37.1	39.1
M7078/24-18-5	.270	46.5	48.9
M7078/24-18-6	.300	56.3	59.3
M7078/24-18-7	.300	65.7	69.2
M7078/24-16-2	.220	23.1	24.3
M7078/24-16-3	.237	35.0	36.8
M7078/24-16-4	.266	46.6	49.0
M7078/24-16-5	.297	58.2	61.3
M7078/24-16-6	.330	70.6	74.3
M7078/24-16-7	.330	82.3	86.6
M7078/24-14-2	.264	35.4	37.3
M7078/24-14-3	.284	53.8	56.6
M7078/24-14-4	.319	71.6	75.4
M7078/24-14-5	.357	89.6	94.3
M7078/24-14-6	.396	108.5	114.2
M7078/24-14-7	.396	126.5	133.2
M7078/24-12-2	.300	50.4	53.0
M7078/24-12-3	.323	76.3	80.3
M7078/24-12-4	.362	101.7	107.1
M7078/24-12-5	.405	127.2	133.9
M7078/24-12-6	.450	154.1	162.2
M7078/24-12-7	.450	179.8	189.3

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T07:59Z
Check the source to verify that this is the current version before use.

TABLE I (Continued)

CABLE PART NO.	MAJOR DIAMETER OF CABLE (in.) (max.)	WEIGHT OF CABLE (lb/1000 ft)	
		(nom) 1/	(max.)
M7078/24-10-2	.392	85.3	89.8
M7078/24-10-3	.422	129.2	136.0
M7078/24-10-4	.473	172.2	181.3
M7078/24-10-5	.529	215.3	226.6
M7078/24-10-6	.588	260.9	274.6
M7078/24-10-7	.588	304.3	320.3
M7078/24-8-2	.494	135.7	142.8
M7078/24-8-3	.532	205.5	216.3
M7078/24-8-4	.596	274.0	288.4
M7078/24-6-2	.600	213.2	224.4
M7078/24-6-3	.646	322.9	339.9
M7078/24-6-4	.724	430.5	453.2
M7078/24-4-2	.730	319.8	336.6
M7078/24-4-3	.786	484.4	509.9
M7078/24-4-4	.881	645.8	679.8
M7078/24-2-2	.870	484.5	510.0
M7078/24-1-2	.960	591.1	622.2
M7078/24-01-2	1.080	775.2	816.0
M7078/24-02-2	1.210	969.0	1020.0
M7078/24-03-2	1.330	1200.0	1265.0
M7078/24-04-2	1.470	1521.0	1601.0

1/ Nominal values for weight of cable are given for information only. Nominal values are not requirements.

Custodians:
Navy - AS
Army - EL
Air Force - 11

Review activities:
Navy -
Army - EL, MI, MU
Air Force - 11
DSA - IS

User activity:
Army - AV

Preparing activity:
Navy - AS
(Project No. 6145-0514)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T07:59Z
Check the source to verify that this is the current version before use.

Review/user information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current Federal Supply Classification Listing of DOD Standardization Documents.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T07:59Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 22-R255

INSTRUCTIONS: This sheet is to be filled out by personnel, either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments and suggestions submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or serve to amend contractual requirements.

SPECIFICATION CABLE, ELECTRIC, AEROSPACE VEHICLE, MIL-W-5086/2 BASIC WIRES, MIL-C-7078/24 UNSHIELDED, UNJACKETED, 600-VOLT, 105° C

ORGANIZATION

CITY AND STATE

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO *(If "yes", in what way?)*

4. REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity - Optional)*

DATE

DD FORM 1 JAN 86 1426

REPLACES EDITION OF 1 OCT 84 WHICH MAY BE USED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T07:59Z
Check the source to verify that this is the current version before use.