
MILITARY SPECIFICATION SHEET

CABLE, ELECTRIC, AEROSPACE VEHICLE, MIL-W-81381/8 BASIC WIRES, COPPER SHIELD, POLYIMIDE TAPE JACKET, 600-VOLT, 200°C

This specification has been approved by the Naval Air Systems Command, Department of the Navy.

The complete requirements for procuring the cable described herein shall consist of this document and the issues in effect of Specification MIL-C-7078 and Specification Sheet MIL-W-81381/8.

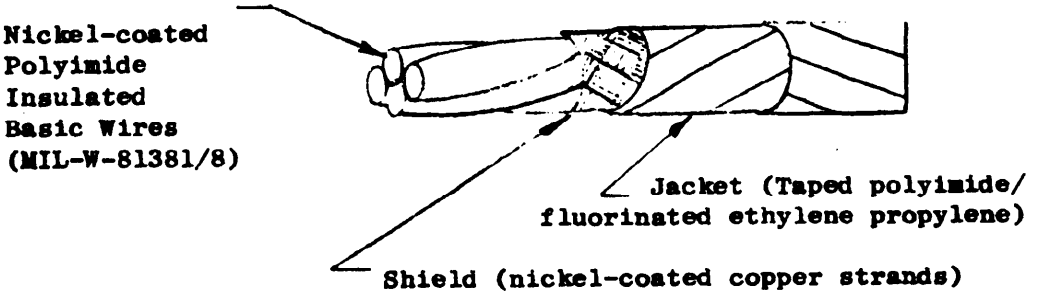

SHIELDED JACKETED CABLE

REQUIREMENTS:
CONSTRUCTION DETAILS: See above Figure and Table 1
VOLTAGE RATING: 600 Volts (rms)
TEMPERATURE RATING: 200°C max. conductor temperature
WET DIELECTRIC TEST AFTER COLD BEND:
Required: Test voltage, 1000 volts (rms)
THERMAL SHOCK TEST: Required. Test temperature 230 ± 3°C
HEAT RESISTANCE: Required. Test temperature 230 ± 3°C
Supplementary wet dielectric test not required.
JACKET FLAWS (SPARK TEST): 1500 volts (rms)
DRY DIELECTRIC: 2500 volts (rms)
RESISTANCE: The increase in resistance of the cabled basic wires due to the lay of the cable shall not be greater than 3% of the maximum value specified for that wire by the basic wire specification.
PART NUMBER: Part numbers in this specification sheet are coded as in the following example:

M7078/26	-	24	-	1
specification sheet number		size number of basic wire		quantity of conductors (basic wires) in cable

FSC 6145

Source: https://assist.dla.mil -- Downloaded: 202640-17T08:00Z
Check the source to verify that this is the current version before use.

TABLE I

Cable part no.	Gage of shield strands (AWG)	Thickness of taped jacket (in.) (min)	Major diameter of shielded jacketed cable (in.)(max)	Weight of shielded jacketed cable (lb/1000 ft)	
				(nom.) 1/	(max)
M7078/26-24-1	38	.0035	.069	4.7	5.3
M7078/26-24-2			.106	7.9	8.5
M7078/26-24-3			.112	10.7	11.4
M7078/26-24-4			.121	13.5	14.5
M7078/26-24-5			.132	16.0	17.5
M7078/26-24-6			.143	18.6	20.1
M7078/26-24-7			.143	20.5	22.2
M7078/26-22-1			.076	6.1	6.8
M7078/26-22-2			.120	10.9	11.6
M7078/26-22-3			.127	14.8	15.8
M7078/26-22-4			.138	18.6	19.7
M7078/26-22-5			.151	22.6	24.3
M7078/26-22-6			.164	26.4	28.3
M7078/26-22-7			.164	29.1	31.5
M7078/26-20-1			.084	8.1	8.7
M7078/26-20-2			.136	14.4	15.4
M7078/26-20-3			.144	20.4	21.7
M7078/26-20-4			.158	25.3	26.9
M7078/26-20-5			.172	31.3	33.3
M7078/26-20-6			.188	36.7	38.9
M7078/26-20-7			.188	41.1	43.6
M7078/26-18-1			.094	10.9	11.7
M7078/26-18-2			.156	19.9	21.1
M7078/26-18-3			.166	28.2	29.6
M7078/26-18-4			.182	35.9	37.7
M7078/26-18-5			.199	44.2	46.6
M7078/26-18-6			.218	52.1	54.8
M7078/26-18-7	38	.0035	.218	58.5	61.9

Source: https://assist.dla.mil -- Downloaded: 20261O-17T08:00Z
Check the source to verify that this is the current version before use.

TABLE I (CONTINUED)

Cable part no.	Gage of shield strands (AWG)	Thickness of taped jacket (in.) (min)	Major diameter of shielded jacketed cable (in.)(max)	Weight of shielded jacketed cable (lb/1000 ft)	
				(nom.) 1/	(max)
M7078/26-16-1	38	.0035	.100	12.9	13.8
M7078/26-16-2			.168	24.2	25.5
M7078/26-16-3			.178	34.3	36.1
M7078/26-16-4			.196	43.8	46.5
M7078/26-16-5			.216	53.5	56.9
M7078/26-16-6			.236	63.3	67.2
M7078/26-16-7			.236	71.8	76.1
M7078/26-14-1			.114	18.3	19.4
M7078/26-14-2			.196	34.2	36.1
M7078/26-14-3			.209	49.9	52.8
M7078/26-14-4	38		.230	64.4	68.4
M7078/26-14-5	36		.259	82.4	86.7
M7078/26-14-6	36		.284	97.9	103.1
M7078/26-14-7	36		.284	111.5	117.4
M7078/26-12-1	38		.133	26.2	27.8
M7078/26-12-2	38		.234	50.4	53.3
M7078/26-12-3	38		.250	73.2	77.0
M7078/26-12-4	36		.282	98.1	103.3
M7078/26-12-5	36		.311	120.6	127.0
M7078/26-12-6	36		.341	144.0	151.6
M7078/26-12-7	36		.341	164.6	173.3
M7078/26-10-1	38		.156	38.7	40.9
M7078/26-10-2	36		.286	78.2	82.3
M7078/26-10-3	36		.305	113.2	119.2
M7078/26-10-4	36		.337	147.7	155.5
M7078/26-10-5	36		.373	181.0	192.5
M7078/26-10-6	36		.410	215.7	229.5
M7078/26-10-7	36	.0035	.410	247.1	262.4

Source: https://assist.dla.mil -- Downloaded: 20261O-17T08:00Z
Check the source to verify that this is the current version before use.

1/ Nominal values for weight of shielded jacketed cable are given for information only. Nominal values are not requirements.

Preparing activity:
Navy - AS
(Project No. 6145-N219)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T08:00Z
Check the source to verify that this is the current version before use.