
MILITARY SPECIFICATION SHEET

# CABLE, ELECTRIC, AEROSPACE VEHICLE, MIL-W-81381/10 BASIC WIRES, COPPER SHIELD, POLYIMIDE TAPE JACKET, 600-VOLT, 200°C

This specification has been approved by the Naval Air Systems Command, Department of the Navy.

The complete requirements for procuring the cable described herein shall consist of this document and the issues in effect of Specification MIL-C-7078 and Specification Sheet MIL-W-81381/10.

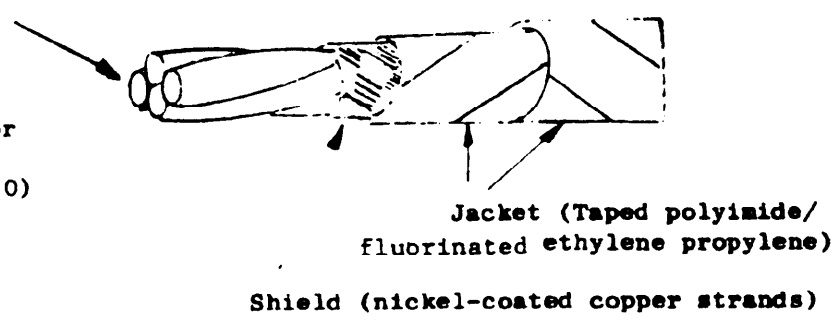


## SHIELDED JACKETED CABLE

REQUIREMENTS:
CONSTRUCTION DETAILS: See above Figure and Table I
VOLTAGE RATING: 600 Volts (rms)
TEMPERATURE RATING: 200°C max. conductor temperature
WET DIELECTRIC TEST AFTER COLD BEND:
Required: Test voltage, 1000 volts (rms)
THERMAL SHOCK TEST: Required. Test temperature 230 ± 3°C
HEAT RESISTANCE: Required. Test temperature 230 ± 3°C
Supplementary wet dielectric test not required.
JACKET FLAWS (SPARK TEST): 1500 volts (rms)
DRY DIELECTRIC: 2500 volts (rms)
RESISTANCE: The increase in resistance of the cabled basic wires due to the lay of the cable shall not be greater than 3% of the maximum value specified for that wire by the basic wire specification.
PART NUMBER: Part numbers in this specification sheet are coded as in the following example:

| M7078/ 28 | - | 24 | - | 1 |
|---|---|---|---|---|
| specification sheet number | | size number of basic wire | | quantity of conductors (basic wires) in cable |

FSC 6145



Source: https://assist.dla.mil -- Downloaded: 2026-10-17T08:00Z
Check the source to verify that this is the current version before use.

TABLE I

| Cable part no. | Gage of shield strands (AWG) | Thickness of taped jacket (in.) (min) | Major diameter of shielded jacketed cable (in.)(max) | Weight of shielded jacketed cable (lb/1000 ft) (nom.) 1/ | Weight of shielded jacketed cable (lb/1000 ft) (max) |
|---|---|---|---|---|---|
| M7078/28-26-1 | 38 | .0035 | .066 | 4.1 | 4.7 |
| M7078/28-26-2 | | | .100 | 6.7 | 7.3 |
| M7078/28-26-3 | | | .105 | 9.1 | 9.9 |
| M7078/28-26-4 | | | .114 | 10.9 | 11.6 |
| M7078/28-26-5 | | | .124 | 13.2 | 14.3 |
| M7078/28-26-6 | | | .134 | 15.1 | 16.5 |
| M7078/28-26-7 | | | .134 | 16.6 | 18.1 |
| M7078/28-24-1 | | | .069 | 4.8 | 5.4 |
| M7078/28-24-2 | | | .106 | 8.1 | 8.7 |
| M7078/28-24-3 | | | .112 | 10.9 | 11.7 |
| M7078/28-24-4 | | | .121 | 13.8 | 14.7 |
| M7078/28-24-5 | | | .132 | 16.3 | 18.0 |
| M7078/28-24-6 | | | .143 | 19.1 | 20.8 |
| M7078/28-24-7 | | | .143 | 21.1 | 22.9 |
| M7078/28-22-1 | | | .076 | 6.1 | 6.8 |
| M7078/28-22-2 | | | .120 | 10.9 | 11.6 |
| M7078/28-22-3 | | | .127 | 14.8 | 15.8 |
| M7078/28-22-4 | | | .138 | 18.6 | 19.7 |
| M7078/28-22-5 | | | .151 | 22.6 | 24.3 |
| M7078/28-22-6 | | | .164 | 26.4 | 28.3 |
| M7078/28-22-7 | | | .164 | 29.1 | 31.5 |
| M7078/28-20-1 | | | .084 | 8.3 | 8.9 |
| M7078/28-20-2 | | | .136 | 14.8 | 15.8 |
| M7078/28-20-3 | | | .144 | 20.8 | 21.9 |
| M7078/28-20-4 | | | .158 | 26.1 | 27.7 |
| M7078/28-20-5 | | | .172 | 32.0 | 34.3 |
| M7078/28-20-6 | | | .188 | 37.6 | 40.1 |
| M7078/28-20-7 | 38 | .0035 | .188 | 42.2 | 45.0 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-17T08:00Z
Check the source to verify that this is the current version before use.

1/ Nominal values for weight of shielded jacketed cable are given for information only. Nominal values are not requirements.

Preparing activity:
Navy - AS
(Project No. 6145-N221)



Source: https://assist.dla.mil -- Downloaded: 2026-10-17T08:00Z
Check the source to verify that this is the current version before use.

# SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 22-R255

INSTRUCTIONS: This sheet is to be filled out by personnel, either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments and suggestions submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or serve to amend contractual requirements.

SPECIFICATION

MIL-C-7078/28(AS)

CABLE, ELECTRIC, AEROSPACE VEHICLE, MIL-W-81381/10 BASIC WIRES, COPPER SHIELD, POLYIMIDE TAPE JACKET, 600-VOLT, 200°C

ORGANIZATION

CITY AND STATE

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO *(If "yes", in what way?)*

4. REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity - Optional)*

DATE

DD FORM 1 JAN 68 1426

REPLACES EDITION OF 1 OCT 64 WHICH MAY BE USED

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T08:00Z
Check the source to verify that this is the current version before use.