INCH-POUND

MIL-PRF-11053G
1 June 2018
SUPERSEDING
MIL-C-11053F (ME)
28 December 1983

PERFORMANCE SPECIFICATION

COUPLING ASSEMBLIES, HOSE
(CHEMICAL, 3/4 AND 1-INCH)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers two types and two sizes of high pressure hose coupling assemblies for connecting chemical or fire hose.

1.2 Classification. Coupling assemblies are classified as the following types and sizes, as specified (see 6.2).

Type II - Expansion ring.

Type III - Compression wedge.

Size - 3/4 - inch (inside diameter).

Size - 1 - inch (inside diameter).

Comments, suggestions, or questions on this document should be addressed to Defense Supply Center Philadelphia, ATTN: DSCP-NASA, 700 Robbins Avenue, Philadelphia, PA 19111-5096 or e-mail to dscpg&ispecomments@dla.mil. Since contact information can change, you may want to verify the currency of this address information using the ASSIST Online database at https://assist.dla.mil.

ASMC N/A FSC 4210

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T15:03Z
Check the source to verify that this is the current version before use.

2. APPLICABLE DOCUMENTS

2.1 Government documents.

-

2.1.1 Specifications and standards. Unless otherwise specified, the following specifications and standards of the issue listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation form a part of this specification to the extent specified herein.

COMMERCIAL ITEM DESCRIPTION

A-A-55535	-	Rings, Expansion, Hose, Brass

SPECIFICATIONS

MILITARY

MIL-I-24391	-	Insulation Tape, Electrical, Plastic, Pressure Sensitive.
MIL-H-24580	-	Hose Assemblies, Synthetic Rubber, Noncollapsible, Fire Fighting.
MIL-H-775	-	Packaging of Hose, Hose Assemblies; Rubber, Plastic, Fabric, or Metal (Including Tubing); and Fittings, Nozzles and Strainers.
MIL-PRF-81733	-	Sealing and Coating Compound, Corrosion Inhibitive.

STANDARDS

FEDERAL

FED-STD-H28/10	-	Screw Thread Standards for Federal Services, Section 10 American National Hose Couplings and Fire-Hose Coupling Threads.

MILITARY

MIL-STD-889	-	Dissimilar Metals.

(Copies of these documents are available online at http://quicksearch.dla.mil/ or from the Standardization Document Order Desk, 700 Robbins Avenue, Building 4D, Philadelphia, PA 19111-5094.)

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless otherwise specified, the issue of the documents which are DoD adopted should be those listed in the issue of the DoDISS and the supplement thereto, if applicable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T15:03Z
Check the source to verify that this is the current version before use.

ASTM International:

ASTM B16/B16M	-	Free-Cutting Brass Rod, Bar, and Shapes for Use In Screw Machines.
ASTM B283	-	Copper and Copper-Alloy Die Forgings (Hot-Pressed).
ASTM B584	-	Copper Alloy Sand Castings for General Applications.
ASTM D3951	-	Commercial Packaging, Standard Practice for.

(Copies of these documents are available from http://www.astm.org or ASTM International, 100 Barr Harbor Drive, West Conshohocken, PA 19428-2959.)

American Society for Quality (ASQ):

ASQ Z1.4	-	Sampling Procedures and Tables for Inspection by Attributes..

(Copies of this document are available online from http://asq.org or from the ASQ Distribution Center, 600 North Plankinton Avenue, Milwaukee, Wisconsin 53207-6028.)

National Fire Protection Association (NFPA)

NFPA No. 194	-	Standards for Screw Threads and Gaskets for Fire Hose Connections.

(Copies of these documents are available from http://www.nfpa.org or the American National Fire Protection Association, 1 Batterymarch Park , Quincy, Massachusetts 02169-7471)

(Non-Government standards and other publications are normally available from the organizations that prepare or distribute the documents. These documents also may be available in or through libraries or other informational services.)

2.3 Order of precedence. In the event of a conflict between the text of this specification and the references cited herein (the text of this specification should take precedence.

3. REQUIREMENTS

3.1 Description. The coupling assemblies shall be bronze castings or brass forgings, with brass fittings, for connecting high-pressure chemical and fire hoses at pressures up to 600 pounds per square inch (psi). The coupling assemblies shall accommodate 3/4-inch or l-inch hose, as applicable, conforming to MIL-H-24580. The coupling assemblies shall have round bores of minimum diameter for full flow capacity for the applicable hose.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T15:03Z
Check the source to verify that this is the current version before use.

3.2 First article. When specified (see 6.2.1), a sample shall be subjected to first article inspection (see 4.4 and 6.3).

3.3 Material. Material shall be as specified herein. Materials not specified shall be selected by the contractor and shall be subject to all provisions of this specification (6.4).

3.3.1 Material deterioration and control. The coupling assemblies shall be fabricated from compatible materials, inherently corrosion and deterioration resistant or treated to provide protection against the various forms of corrosion an d deterioration that may be encountered in any of the applicable storage and operating environment to which the item may be exposed.

3.3.1.1 Dissimilar metals. Dissimilar metals, as defined in MIL-STD-889, shall be electrically insulated from one another to minimize or prevent galvanic corrosion. Insulation may be provided by an insulating barrier such as corrosion inhibiting sealant conforming to MIL-PRF-81733 or chromate tape conforming to MIL-I-24391. Protection against any galvanic corrosion could also be obtained by exclusion of the electrolyte if feasible.

3.3.1.2 Identification of materials and finishes. The contractor shall identify the specific material, material finish or treatment for use with components and sub–components, and shall make information available, upon request, to the contracting officer or designated representative.

3.3.2 Bronze castings. Bronze castings shall conform to ASTM B584, Alloy UNS C92200.

3.3.3 Brass. The brass shall conform to ASTM B16/B16M, Alloy UNS C36000 or ASTM B283, Alloy UNS C37700, as applicable.

3.4 Gaskets. Gaskets shall.be provided with the couplings and shall conform to NFPA No. 194.

3.5 Threads. Threads shall.be American National Fire-Hose Coupling Threads conforming to FED-STD-H28/10.

3.6 Lugs. Coupling assemblies shall be provided with wrenching lugs, for 3/4-inch and rocker lugs for the l-inch size.

3.7 Finish. Coupling assemblies shall have a smooth finish in accordance with the contractor’s standard practice.

3.8 Marking. Coupling assemblies shall be marked for their size and manufacture by stamping or embossing in accordance with the contractor’s standard practice.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T15:03Z
Check the source to verify that this is the current version before use.

3.9 Types of hose assemblies.

3.9.1 Type II, expansion ring. Type II coupling assemblies shall be provided with internally corrugated sockets and mated expansion rings, to be assembled as shown in figure 1 to produce a leak-free connection.

3.9.1.1 Expansion rings. Expansion rings shall conform to A-A-55535 for the applicable size.

3.9.2 Type III, compression wedge. Type III coupling assemblies shall be provided with corrugated sockets and threaded expanded wedges to be assembled as shown in figure 2 to produce a leak-free connection. Internal cylinder key-type wrenches shall be furnished in the quantity as specified (see 6.2).

3.10 Workmanship. Coupling assemblies shall be of uniform dimension for an applicable type, clean and free of dirt, chips, and scale. External surfaces shall be free from burrs, sharp edges, and corners except where required.

4. VERIFICATION

4.1 Component and material inspection. The contractor is responsible for insuring that components and materials used are manufactured, examined and tested in accordance with referenced specifications and standards, as applicable.

4.2 Classification of inspections. The inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.3).

b. Quality conformance inspection (see 4.4).

c. Inspection of packaging (see 4.6).

4.3 First article inspection.

4.3.1 Examination. The first article coupling assemblies shall be examined as specified in 4.5.1. Presence of one or more defects shall be cause for rejection of the applicable hose assembly.

4.3.2 Test. The first article coupling assemblies shall be tested as specified in 4.5.2. Failure of the test shall be cause for rejection of the applicable coupling assembly.

4.4 Quality conformance inspection.

4.4.1 Sampling. Sampling for examination and test shall be in accordance with ASQ Z1.4, inspection level S-3.

4.4.2 Examination. Samples selected in accordance with 4.4.1 shall be examined as specified in 4.5.1. AQL shall be 2.5 percent defective for major defects and 4.0 percent defective for minor defects.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T15:03Z
Check the source to verify that this is the current version before use.

4.4.3 Tests. Samples selected in accordance with 4.4.1 shall be tested as specified in 4.5.2. AQL shall be 10.0 percent defective.

4.5 Inspection procedure.

4.5.1 Examination. The sample coupling assemblies shall be examined as specified herein, for the following defects:

Major

101. Material not as specified.
102. Materials are not resistant to corrosion and deterioration or treated to be resistant to corrosion and deterioration for the applicable and operating environments.
103. Dissimilar metals as defined in MIL–STD–889 are not effectively insulated from each other.
104. Contractor does not have documentation available for identification of material, material finishes or treatment.
105. Bronze castings not as specified.
106. Brass not as specified.
107. Gaskets not as specified.
108. Threads not as specified.
109. Lugs not as specified.
110. Finish not as specified.
111. Type II, expansion ring not as specified.
112. Expansion rings not as specified.
113. Type III, compression wedge not as specified.

Minor

201. Marking not as specified.
202. Workmanship not as specified.

4.5.2 Pressure test. Connect the coupling assembly to a section of applicable hose conforming to MIL-H-24580 as recommended by the contractor. Subject the coupling assembly to an internal pressure of 600 psi, then submerge in water for a period of not less than 3 minutes. Evidence of leakage at either end of the hose and coupling assembly, or from the mating parts of the assembly, or any creeping, loosening or separating of the hose and assembly shall constitute failure of this test.

4.6 Inspection of packaging. The preservation, packing and marking for level A or B shall be examined to determine compliance with MIL-H-775. The preservation, packing and marking for commercial shall be examined in accordance with ASTM D3951.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T15:03Z
Check the source to verify that this is the current version before use.

5. PACKAGING

5.1 Packaging. For acquisition purposes, the packaging requirements shall be as specified in the contract or order (see 6.2). When packaging of materiel is to be performed by DoD or in-house contractor personnel, these personnel need to contact the responsible packaging activity to ascertain packaging requirements. Packaging requirements are maintained by the Inventory Control Point's packaging activities within the Military Service or Defense Agency, or within the military service's system commands. Packaging data retrieval is available from the managing Military Department's or Defense Agency's automated packaging files, CD-ROM products, or by contacting the responsible packaging activity.

6. NOTES

6.1 Intended use. The coupling assemblies are intended for use with a hose used in handling water and chemicals for fire-fighting equipment.

6.2 Ordering data. Acquisition documents should specify the following:

a. Title, number, and date of this specification.

b. Type and size of coupling assembly required (see 1.2).

c. When a first article is required for inspection and approval (see 3.2).

d. Number of key-type wrenches required (see 3.9.2).

e. Degree of preservation and packing required (see 5.1 and 5.2).

6.3 First article. When a first article inspection is required, the item will be tested and should be a preproduction model coupling assembly. The first article should consist of one or more coupling assemblies. The contracting officer should include specific instruction in acquisition documents regarding arrangements for examinations, tests, and approval of the first article.

6.4 Recycled material. It is encouraged that recycled material be used, when practical, as long as it meets the requirements of this specification (see 3.3).


6.5 Classification change. Type I and type IV coupling assemblies have been discontinued since they are no longer required.

6.6 Subject term (key word) listing.

brass fittings
brass forgings
bronze castings
fire
high pressure


6.7 Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T15:03Z
Check the source to verify that this is the current version before use.

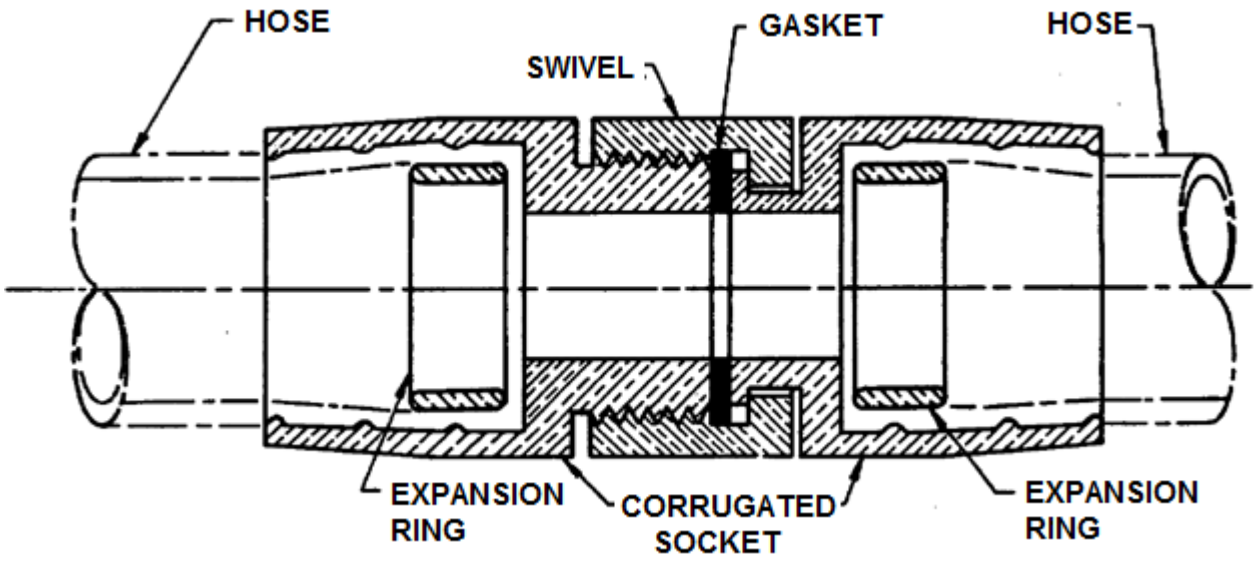

X-2945A

Figure 1, Type II, expansion ring.

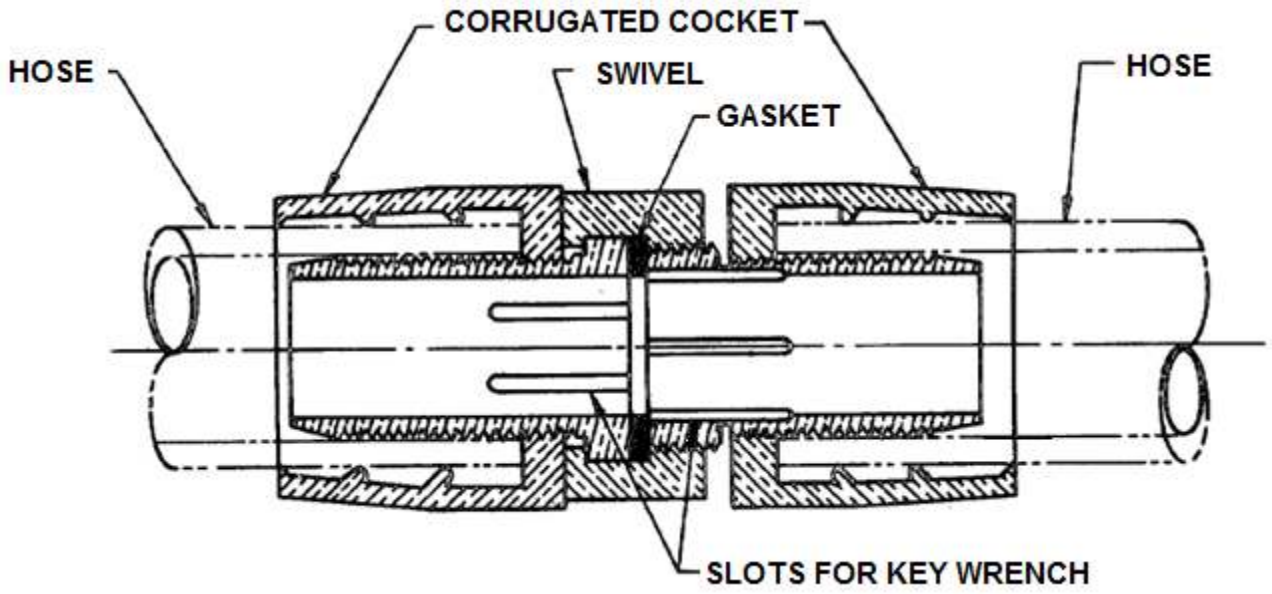

X-2946A

Figure 2, Type III, compression wedge.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T15:03Z
Check the source to verify that this is the current version before use.

MILITARY ACTIVITIES:

Custodians:
Army – AV
Navy –YD

Preparing activity:
DLA - CQ

(Project 4210-2013-002)

Reviewer:
Army – AR

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T15:03Z
Check the source to verify that this is the current version before use.