

MILITARY SPECIFICATION SHEET

RECTIFIERS, METALLIC, SELENIUM, SINGLE PHASE, HALF WAVE, STYLE RS10


This specification sheet forms a part of the latest issue of Military Specification MIL-R-11050.

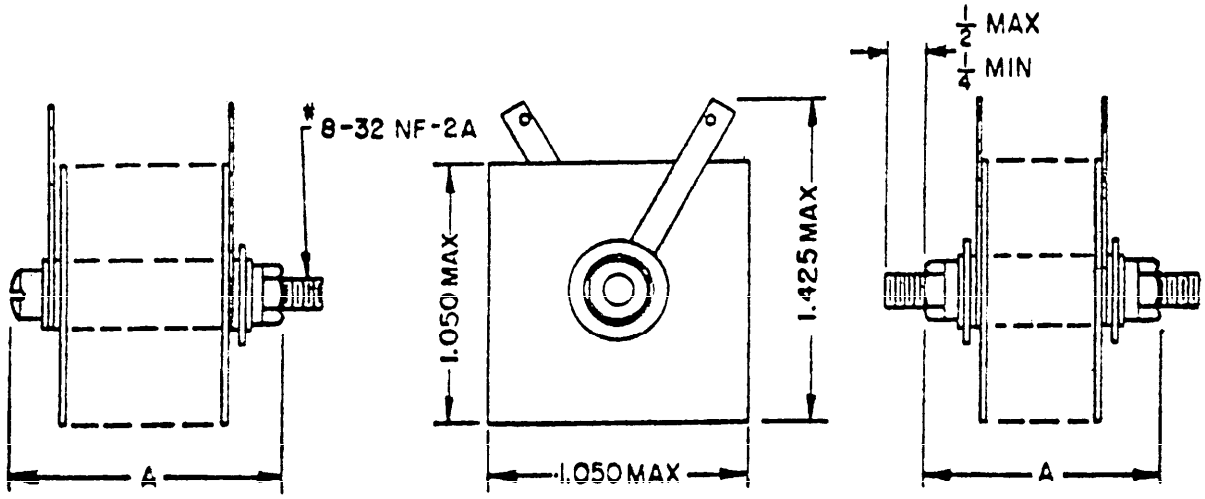


CIRCUIT DIAGRAM



VOLTAGE DERATING CURVE



CURRENT DERATING CURVE



NOTES:

1. All dimensions in inches.
2. Terminals shall protrude from the top of the rectifier and shall not extend beyond the protracted width of the cells.
3. Reverse current shall not exceed 5 milliamperes.

Fed. Sup. Class.
6130

Source: https://assist.dla.mil -- Downloaded: 202610-17T15:02Z
Check the source to verify that this is the current version before use.

TYPE-DESIGNATION EXAMPLE

RS10	B	100	HS	141
STYLE	MOUNTING	DC VOLTAGE RATING	CIRCUIT CONFIGURATION	DC CURRENT RATING

TYPE DESIGNATION [1]	DC OUTPUT RATINGS [2]		LENGTH A [3]	FORWARD VOLTAGE DROP, MAXIMUM	AC APPLIED VOLTAGE, MAXIMUM (RMS)	NUMBER OF CELLS PER RECTIFIER, MINIMUM
	Current	Voltage				
	Ampere	*Volts*	*Inches*	*Volts*	*Volts*	
RS10-100HS141	.140	10	11/16	2.0	26	1
RS10-200HS141	.140	20	7/8	4.0	52	2
RS10-300HS141	.140	30	1-1/16	6.0	78	3
RS10-400HS141	.140	40	1-1/4	8.0	104	4
RS10-500HS141	.140	50	1-7/16	10.0	130	5
RS10-600HS141	.140	60	1-19/32	12.0	156	6
RS10-800HS141	.140	80	1-15/16	16.0	208	8
RS10-101HS101	.100	100	2-7/32	15.0	260	10
RS10-101HS141	.140	100	2-9/16	20.0	260	10
RS10-121HS800	.080	120	2-1/2	18.0	312	12
RS10-121HS101	.100	120	3-3/16	24.0	312	12
RS10-141HS800	.080	140	2-11/16	21.0	364	14
RS10-141HS101	.100	140	3-19/32	28.0	364	14
RS10-161HS800	.080	160	3	24.0	416	16
RS10-161HS101	.100	160	4	32.0	416	16
RS10-181HS800	.080	180	3-9/32	27.0	468	18
RS10-181HS101	.100	180	4-13/32	36.0	468	18
RS10-201HS800	.080	200	3-9/16	30.0	520	20
RS10-201HS101	.100	200	4-13/16	40.0	520	20
RS10-231HS800	.080	230	3-31/32	34.5	598	23
RS10-231HS101	.100	230	5-13/32	46.0	598	23
RS10-261HS600	.060	260	4-11/32	39.0	676	26
RS10-261HS800	.080	260	6-1/32	52.0	676	26
RS10-301HS600	.060	300	4-31/32	45.0	780	30
RS10-351HS600	.060	350	5-5/8	52.5	910	35
RS10-401HS600	.060	400	6-3/8	60.0	1040	40

[1] Insert appropriate letter for mounting method. Bolt (letter B) is available only for rectifiers with a length A dimension of 1¼ inches or less. Stud (letter S) is available for rectifiers of all lengths.

[2] Ratings are for resistive and inductive loads and continuous operation at 55° C ambient temperature. For capacitive or battery loads, the ratings shall be 80 percent of those specified.

[3] For length A dimensions less than 6 inches, tolerance is ±1/16 inch; from 6 to 12 inches, inclusive, tolerance is ±⅛ inch; and for 12 inches and greater, tolerance is ±¼ inch.

Source: https://assist.dla.mil -- Downloaded: 202640-17T15:02Z
Check the source to verify that this is the current version before use.