

MILITARY SPECIFICATION SHEET

RECTIFIERS, METALLIC, SELENIUM, SINGLE PHASE, CENTER TAP, STYLE RS10


This specification sheet forms a part of the latest issue of Military Specification MIL-R-11050.

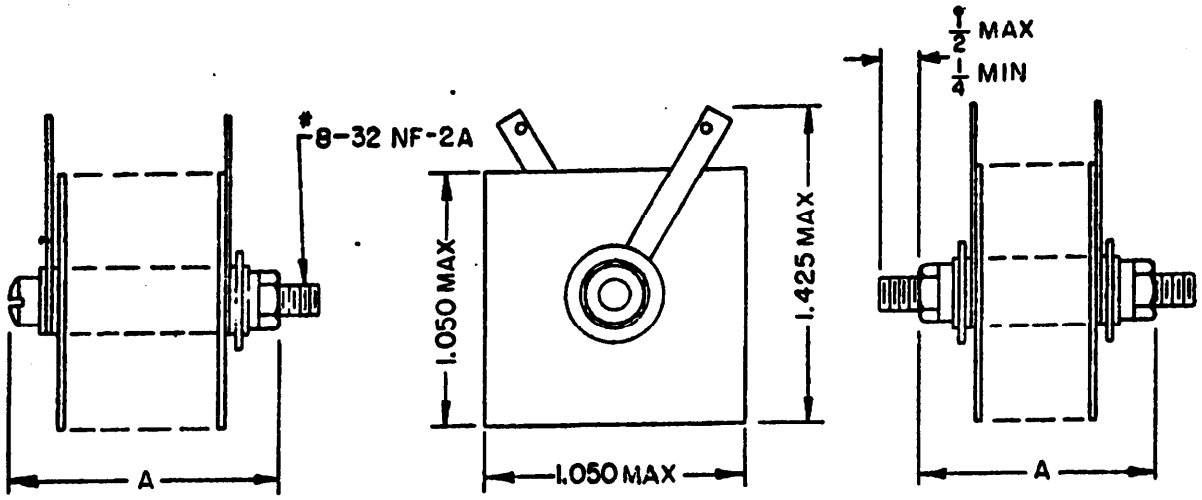


CIRCUIT DIAGRAM



VOLTAGE DERATING CURVE



CURRENT DERATING CURVE



NOTES:

1. All dimensions in inches.
2. Terminals shall protrude from the top of the rectifier and shall not extend beyond the protracted width of the cells.
3. AC terminals shall be located at the extremities of the rectifier.
4. Reverse current shall not exceed 5 milliamperes.

Fed. Sup. Class.
6130

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T15:02Z
Check the source to verify that this is the current version before use.

TYPE-DESIGNATION EXAMPLE

RS10	B	100	CS	281
STYLE	MOUNTING	DC VOLTAGE RATING	CIRCUIT CONFIGURATION	DC CURRENT RATING

TYPE DESIGNATION [1]	DC OUTPUT RATINGS [2]		LENGTH A [3]	FORWARD VOLTAGE DROP, MAXIMUM	AC APPLIED VOLTAGE, MAXIMUM (RMS)	NUMBER OF CELLS PER RECTIFIER, MINIMUM
	Current	Voltage				
	Ampere	*Volts*	*Inches*	*Volts*	*Volts*	
RS10-100CS281	.280	10	15/16	2.0	13	2
RS10-200CS281	.280	20	1-5/16	4.0	26	4
RS10-300CS281	.280	30	1-21/32	6.0	39	6
RS10-400CS281	.280	40	2	8.0	52	8
RS10-500CS201	.200	50	2-9/32	7.5	65	10
RS10-500CS281	.280	50	2-5/8	10.0	65	10
RS10-600CS161	.160	60	2-9/16	9.0	78	12
RS10-600CS221	.220	60	3-1/4	12.0	78	12
RS10-800CS161	.160	80	3-1/16	12.0	104	16
RS10-800CS221	.220	80	4-1/16	16.0	104	16
RS10-101CS161	.160	100	3-5/8	15.0	130	20
RS10-101CS221	.220	100	4-7/8	20.0	130	20
RS10-121CS161	.160	120	4-3/16	18.0	156	24
RS10-121CS221	.220	120	5-11/16	24.0	156	24
RS10-141CS121	.120	140	4-3/4	21.0	182	28
RS10-141CS161	.160	140	6-1/2	28.0	182	28
RS10-161CS121	.120	160	5-5/16	24.0	208	32
RS10-181CS121	.120	180	5-7/8	27.0	234	36
RS10-201CS121	.120	200	6-7/16	30.0	260	40

[1] Insert appropriate letter for mounting method. Bolt (letter B) is available only for rectifiers with a length A dimension of 1¾ inches or less. Stud (letter S) is available for rectifiers of all lengths.

[2] Ratings are for resistive and inductive loads and continuous operation at 55° C ambient temperature. For capacitive or battery loads, the ratings shall be 80 percent of those specified.

[3] For length A dimensions less than 6 inches, tolerance is ±1/16 inch; from 6 to 12 inches, inclusive, tolerance is ±⅛ inch; and for 12 inches and greater, tolerance is ±¼ inch.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T15:02Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 119-R004

INSTRUCTIONS

This sheet is to be filled out by personnel either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity *(as indicated on reverse hereof)*.

SPECIFICATION

ORGANIZATION *(Of submitter)* | CITY AND STATE

CONTRACT NO. | QUANTITY OF ITEMS PROCURED | DOLLAR AMOUNT
$

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES.

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO IF "YES", IN WHAT WAY?

4. REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity)* | DATE

DD FORM 1 APR 63 1426 REPLACES NAVSHIPS FORM 4863, WHICH IS OBSOLETE PLATE NO. 15419

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T15:02Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE NAVY

POSTAGE AND FEES PAID
NAVY DEPARTMENT

OFFICIAL BUSINESS

FOLD

PLATE NO. 15419 (BACK)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T15:02Z
Check the source to verify that this is the current version before use.