

MILITARY SPECIFICATION SHEET

RECTIFIERS, METALLIC, SELENIUM, SINGLE PHASE, BRIDGE, STYLE RS10


This specification sheet forms a part of the latest issue of Military Specification MIL-R-11050.

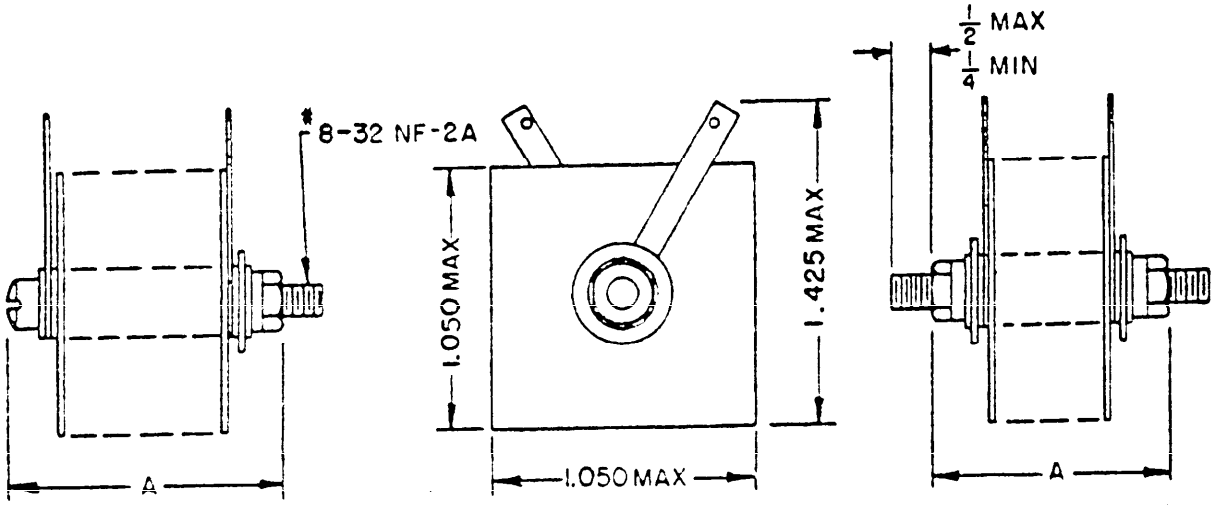


CIRCUIT DIAGRAM



VOLTAGE DERATING CURVE



CURRENT DERATING CURVE



NOTES:

1. All dimensions in inches.
2. Terminals shall protrude from the top of the rectifier and shall not extend beyond the protracted width of the cells.
3. Negative terminals shall be located at the extremities of the rectifier.
4. Reverse current shall not exceed 10 milliamperes.

Fed. Sup. Class.
6130

Source: https://assist.dla.mil -- Downloaded: 202610-17T15:02Z
Check the source to verify that this is the current version before use.

TYPE-DESIGNATION EXAMPLE

RS10	B	100	BS	141
STYLE	MOUNTING	DC VOLTAGE RATING	CIRCUIT CONFIGURATION	DC CURRENT RATING

TYPE DESIGNATION [1]	DC OUTPUT RATINGS [2]		LENGTH A [3]	FORWARD VOLTAGE DROP, MAXIMUM	AC APPLIED VOLTAGE, MAXIMUM (RMS)	NUMBER OF CELLS PER RECTIFIER, MINIMUM
	Current	Voltage				
	Ampere	*Volts*	*Inches*	*Volts*	*Volts*	
RS10-100BS281	.280	10	1-3/8	4.0	18	4
RS10-200BS281	.280	20	1-3/8	4.0	26	4
RS10-400BS281	.280	40	2-1/16	8.0	52	8
RS10-600BS161	.160	60	2-5/8	9.0	78	12
RS10-600BS221	.220	60	3-5/16	12.0	78	12
RS10-800BS161	.160	80	3-1/8	12.0	104	16
RS10-800BS221	.220	80	4-1/8	16.0	104	16
RS10-101BS161	.160	100	3-11/16	15.0	130	20
RS10-101BS221	.220	100	4-15/16	20.0	130	20
RS10-121BS161	.160	120	4-1/4	18.0	156	24
RS10-121BS221	.220	120	5-3/4	24.0	156	24
RS10-141BS121	.120	140	4-13/16	21.0	182	28
RS10-141BS161	.160	140	6-9/16	28.0	182	28
RS10-161BS121	.120	160	5-3/8	24.0	208	32
RS10-181BS121	.120	180	5-15/16	27.0	234	36
RS10-201BS121	.120	200	6-1/2	30.0	260	40

[1] Insert appropriate letter for mounting method. Bolt (letter B) is available only for rectifiers with a length A dimension of 1¾ inches or less. Stud (letter S) is available for rectifiers of all lengths.

[2] Ratings are for resistive and inductive loads and continuous operation at 55° C ambient temperature. For capacitive or battery loads, the ratings shall be 80 percent of those specified.

[3] For length A dimensions less than 6 inches, tolerance is ±1/16 inch; from 6 to 12 inches, inclusive, tolerance is ±⅛ inch; and for 12 inches and greater, tolerance is ±¼ inch.

Source: https://assist.dla.mil -- Downloaded: 202610-17T15:02Z
Check the source to verify that this is the current version before use.