

MILITARY SPECIFICATION SHEET

RECTIFIERS, METALLIC, SELENIUM, SINGLE PHASE, HALF WAVE, STYLE RS20


This specification sheet forms a part of the latest issue of Military Specification MIL-R-11050.

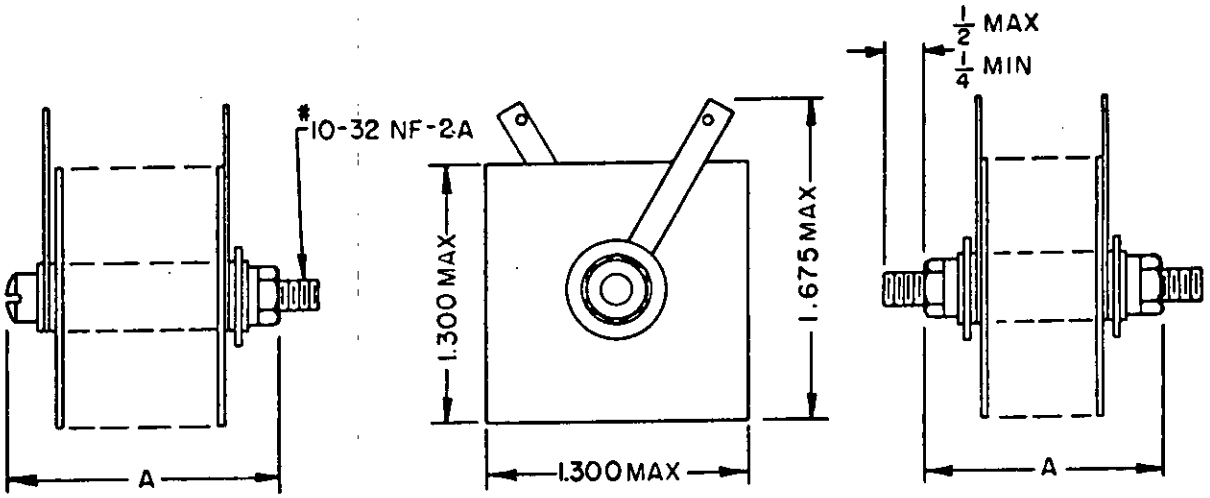


CIRCUIT DIAGRAM



VOLTAGE DERATING CURVE



CURRENT DERATING CURVE



NOTES:

1. All dimensions in inches.
2. Terminals shall protrude from the top of the rectifier and shall not extend beyond the protracted width of the cells.
3. Reverse current shall not exceed 10 milliamperes.

Fed. Sup. Class.
6130

Source: https://assist.dla.mil -- Downloaded: 202640-17T15:03Z
Check the source to verify that this is the current version before use.

TYPE-DESIGNATION EXAMPLE

RS20	B	100	HS	281
STYLE	MOUNTING	DC VOLTAGE RATING	CIRCUIT CONFIGURATION	DC CURRENT RATING

TYPE DESIGNATION [1]	DC OUTPUT RATINGS [2]		LENGTH A [3]	FORWARD VOLTAGE DROP, MAXIMUM	AC APPLIED VOLTAGE, MAXIMUM (RMS)	NUMBER OF CELLS PER RECTIFIER, MINIMUM
	Current	Voltage				
	Ampere	*Volts*	*Inches*	*Volts*	*Volts*	
RS20-100HS281	.280	10	3/4	2.0	26	1
RS20-200HS281	.280	20	15/16	4.0	52	2
RS20-300HS281	.280	30	1-1/8	6.0	78	3
RS20-400HS281	.280	40	1-5/16	8.0	104	4
RS20-500HS281	.280	50	1-1/2	10.0	130	5
RS20-600HS281	.280	60	1-11/16	12.0	156	6
RS20-800HS281	.280	80	2-1/32	16.0	208	8
RS20-101HS201	.200	100	2-11/32	15.0	260	10
RS20-101HS281	.280	100	2-3/4	20.0	260	10
RS20-121HS161	.160	120	2-21/32	18.0	312	12
RS20-121HS201	.200	120	3-7/16	24.0	312	12
RS20-141HS161	.160	140	2-31/32	21.0	364	14
RS20-141HS201	.200	140	3-29/32	28.0	364	14
RS20-161HS161	.160	160	3-1/4	24.0	416	16
RS20-161HS201	.200	160	4-11/32	32.0	416	16
RS20-181HS161	.160	180	3-9/16	27.0	468	18
RS20-181HS201	.200	180	4-13/16	36.0	468	18
RS20-201HS161	.160	200	3-27/32	30.0	520	20
RS20-201HS201	.200	200	5-1/4	40.0	520	20
RS20-231HS161	.160	230	4-9/32	34.5	598	23
RS20-231HS201	.200	230	5-15/16	46.0	598	23
RS20-261HS121	.120	260	4-25/32	39.0	676	26
RS20-261HS161	.160	260	6-15/32	52.0	676	26
RS20-301HS121	.120	300	5-3/8	45.0	780	30
RS20-351HS121	.120	350	6-5/32	52.5	910	35
RS20-401HS121	.120	400	6-29/32	60.0	1040	40

[1] Insert appropriate letter for mounting method. Bolt (letter B) is available only for rectifiers with a length A dimension of 1¾ inches or less. Stud (letter S) is available for rectifiers of all lengths.

[2] Ratings are for resistive and inductive loads and continuous operation at 55° C ambient temperature. For capacitive or battery loads, the ratings shall be 80 percent of those specified.

[3] For length A dimensions less than 6 inches, tolerance is ±1/16 inch; from 6 to 12 inches, inclusive, tolerance is ±⅛ inch; and for 12 inches and greater, tolerance is ±¼ inch.

Source: https://assist.dla.mil -- Downloaded: 202610-17T15:03Z
Check the source to verify that this is the current version before use.